

Dec. 1980
\$1.60* NZ\$1.75



**ELECTRONICS
TODAY
INTERNATIONAL**

GOLD DETECTOR

Can discriminate 'trash' from 'treasure'

BUILD A pH METER

Keep your pool or fish tank healthy; lots of other uses etc.

Voltage Regulators
-circuits and techniques


Learn BASIC

**Pot core
coil design**

Hi-Fi Reviews:

**Marantz ST500
FM/AM tuner**

**PAS-30
loudspeakers
from G.R.D.**

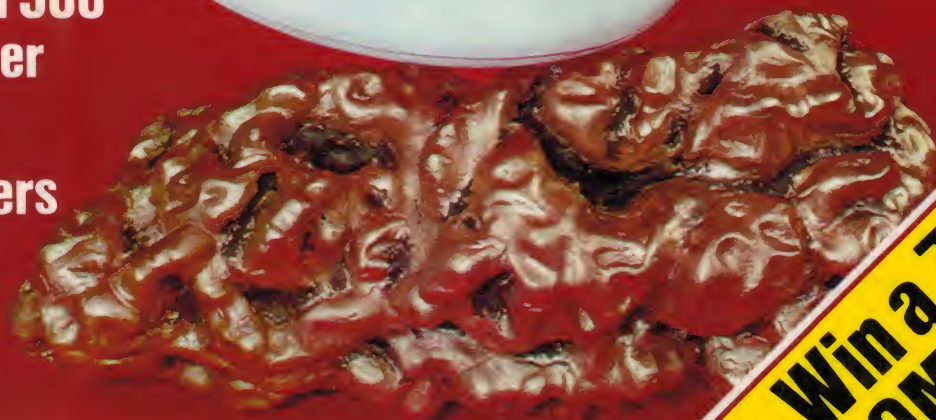

**Win a ZX80
COMPUTER**
- WITH SOFTWARE

AFTER 500 PLAYS OUR HIGH FIDELITY TAPE STILL DELIVERS HIGH FIDELITY.



If your old favourites don't sound as good as they used to, the problem could be your recording tape.

Some tapes show their age more than others. And when a tape ages prematurely, the music on it does too.

What can happen is, the oxide particles that are bound onto tape loosen and fall off, taking some of your music with them.

At Maxell, we've developed a binding process that helps to prevent this. When oxide particles are bound onto our tape, they stay put. And so does your music.

So even after a Maxell recording is 500 plays old, you'll swear it's not a play over five.

Distributed by
HAGEMEYER

For further information on Maxell Tapes
write to Maxell Advisory Service,
P.O. Box 307, North Ryde, N.S.W. 2113



maxell®
simply excellent

WT191/80

QUICK INDEX

FEATURES:

- 16** pH — the Acid Test
- 104** Back Door into BASIC
- 114** Matrox Video Boards Reviewed
- 121** Micros Invade the Communications World
- 101** Win a ZX80 Computer & Software
- 87** Special Offer: C10 Data Cassettes

SOUND SECTION:

- 135** Sound News
- 150** The Craft of the Speaker Box Maker
- 156** Marantz ST500 FM/AM tuner review
- 168** G.R.D. PAS30 Loudspeakers reviewed
- 138** Mail Order 'Disco Lite'

PROJECTS & TECHNICAL

- 23** 572: Digital pH Meter
- 39** 1500: Discriminating Metal Detector
- 57** 597: Emergency Lighting Unit
- 65** Lab Notes: Voltage Regulators
- 74** Designing Potcore Inductors
- 52** Short Circuits: Thermatic Fan Controller
- 80** Ideas For Experimenters
- 85** Shoparound
- 145** PC Board Patterns

WE HAVE RECEIVED quite a few enquiries over the past six months or so concerning projects which have appeared in the British edition of ETI, which have not subsequently appeared in the Australian edition of ETI. Indeed, some callers have become quite irate, despite our explanations! Firstly, we should put readers in the picture about our relationship with the overseas editions of ETI.

ETI originated in Australia in 1971 under Modern Magazines and a British edition was started by us a year later. German, Dutch and Canadian editions followed in 1976 and 1977. There was a French edition produced for a while but that was sold and has since been converted to a hi-fi magazine.

Australia's ownership and interests in the overseas editions were sold by the previous owners of Modern Magazines in June 1978. Since that date the overseas editions have been autonomous, although some material is exchanged between the various editions. The majority of projects originated by ETI Australia are re-published in the overseas editions. Almost all the projects in the Canadian edition, for example, are taken from ETI Australia.

The UK edition of ETI is not available in Australia — nor ours in the UK — owing to pre-existing agreements. However, it seems that, by one means or another, some Australian readers have become aware of projects published in the British edition but not published in ETI Australia.

Naturally, we exchange copies of each issue with the overseas editions. *Every* project originated overseas we consider for republication here — and we do that with a great deal of care: we consider the usefulness and possible popularity of the project, whether we have done something similar in the past, are the techniques new and/or interesting, what about component availability? The latter is particularly important. That's generally the reason why we don't (can't!) republish a project from an overseas edition. So many components, particularly ICs, available in Europe are just not available here. Often we consider finding some other way around this problem, but it generally means re-designing the project and in so many cases, because of the special devices used, the re-design is either impossible or the project becomes too expensive to the end user — you. We often go to great lengths, and spend considerable time, trying to find sources of components for would-be popular projects from our overseas editions. Sometimes we're successful, sometimes not.

Those projects we do take from overseas editions we build up in our own laboratory and completely test out. Sometimes we have to modify pc boards to suit locally available components (relays, cases, meters etc) and the text is generally rewritten and additional material included. In fact, we once so changed a project that we'd taken from the UK edition that they accidentally re-published it some months after their original project appeared!

If you come to hear about a project that one of our overseas editions has done, but which has not appeared in ETI Australia, rest assured we've looked at it closely and we're either preparing it for publication or it's been shelved until special components can be obtained.

The best wishes of the season to all our readers and advertisers.



Roger Harrison

Roger Harrison
Editor

advertisers

A.P. Products	13, 17
Air New Zealand	14
Ampec Electronics	18
Audio Engineers	152
Aust. Guarantee Corp.	170
All Electronic Components	46
Applied Technology	119
A&R Soanar	72
AED	124
Auditec Aust.	22
Audio Kits	174
Audio Telex Comm.	68
Amscat Systems	97
Autotron Aust.	48
Advanced Electronic Systems	154
Barratt Lighting	7
Bose Australia	163
Bell Instruments	123
Belle Lumiere	174
Bright Star Crystals	64
Box Hill Tech.	173
Consolidated Marketing	30, 31, 120
C&K Electronics	22
C.I.S.A.	73
Computerland in Melbourne	125
CPI	149
Computer Imports	84
Commodore Aust.	92
Chadwick Audio	153
Cooper Tools	94
Computer Country	110
Compucom	103
Cletronic	173
Dick Smith	36, 37, 56, 62, 68, 70, 81, 96, 109, 112, 113, 118, 129, 166, 167
Digital Control Data System	82
Danish Hi Fi	158
David East	29
Delosound	13
Dynaudio Aust.	174
D.J. Gillin	173
Daneva Control	88
Ellistronics Wholesale	78, 79
Electro-Voice	148
Electronic Agencies	60
Emona	68, 108, 127
Electrocraft	154
Edible Electronics	110
Energy Control	173
Ferguson Transformers	54
Freedman Electronics	153
John F. Rose	33
Jaycar	147
Hagemeyer	2, 179
Hitachi Sales Aust.	134
Hitachi Ltd.	142, 143
Looky Video	29
McWilliams Wines	6
Marantz Aust.	140
Maruni Corp.	11, 139
Microtrix	28
Micro 80	99
Mensa Computers	86
Magnavox	161
McGills Newsagency	127
Micro Pro Design	107
Microcomputer House	110
National Panasonic A Asia	132
National Panasonic	180
Northpoint Hi Fi	147
Philips Industries	159
Pre Pak	55
Plessey	64
Qantas Airways	15
Rod Irving	50, 51, 111
Radio Parts	48
Radio Despatch	48
Resco P/L	64
Stuart Alexander	144
Sony Australia	131, 137
Spectrum Lighting	34
SM Electronics	102, 103
Systems Automation	88, 89
Sansul	155
Speedy Communications	162
Sevlen Lighting	54
S.I. Microcomputers	117
Scope Laboratories	61
Small Bus. Computers	103
Starcross Scientific	29
Software Source	173
T.C.T. Micro Design	100
The Bulletin	175
Tasman Electronics	53
The Logic Shop	94
T.A.A.R.C.	173
University Graham Inst.	63
VSI	66
Warburton Frankl.	171



**ELECTRONICS
TODAY
INTERNATIONAL**



COVER

We don't think we're making extravagant claims for our super new metal detector. It really can tell precious metals from old iron! Photo, gold nugget and cover design by the inimitable Ivy Hansen.

features

pH — THE ACID TEST 16


Most people know that pH is an index of acidity and alkalinity, but what exactly is it and how can we measure it? This article answers these questions and talks about fascinating applications of the pH concept.

1500: SUPER METAL DETECTOR 39

Truly an excellent metal detector — it features three T/R modes of operation plus VLF, variable ground balance control and variable discrimination control.

BACK DOOR INTO BASIC 104

The first in a series of articles that will explain the basics of BASIC programming, using the familiar pocket calculator as a starting point.

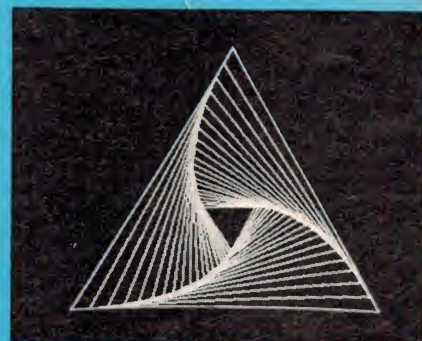

MATROX VIDEO BOARDS REVIEWED 114

Two stackable video boards from Matrox of Canada give a steady, flicker-free display with lots of flexibility. This article discusses their merits and deficiencies.



CONTEST — WIN A ZX80 PORTABLE MICROCOMPUTER 101

You could win one of the world's cutest micros and six packs of software in this easy-to-enter competition.

news

NEWS DIGEST 8

TV transmissions by Technical College; Room temperature superconductivity; Venusian surface mapped by orbiter; Video noise reducer, etc.

PRINTOUT 90

The 8th World Computer Congress in Melbourne; Review of the Sinclair ZX80; Software contest results; Sorcerer hints and programs, etc.

COMMUNICATIONS NEWS 126

Six metres "buried"; National VHF Field Day; ETI's call sign.

SHORTWAVE LOGGINGS 130

India woos DXers; Summer nights good for African signals; Iceland comes in well.

projects



572: DIGITAL pH METER 23
At last! An inexpensive and accurate pH meter. It uses an Australian-made probe and shows pH units on a liquid crystal display.

597: EMERGENCY LIGHTING UNIT 57
No more fumbling around in the dark! If the mains power fails, this simple, reliable unit automatically switches on a small lamp.

**LAB NOTES —
VOLTAGE REGULATORS 65**
Everything you're ever likely to need to know about voltage regulation, from simple zeners to sophisticated three terminal regulator circuits.

DESIGNING POTCORE INDUCTORS 74
Ferrite potcores have many advantages for small inductors and transformers. This article describes a simple method of designing coils for low frequency applications.

**SERIES 3000
COMPACT AMPLIFIER
OVERLAY DIAGRAM 32**
In last month's issue, this wasn't printed very clearly, so we're repeating it before we get deluged with complaints!

sound

SOUND NEWS 135
Sansui's feedforward amplifiers; Rega Planar 2 released; TEAC diversifies, etc.

**THE CRAFT OF
THE SPEAKER BOX MAKER 150**
There's more to making a speaker box than just slapping a few bits of wood together. We look at Chadwick Audio's operation.



**MARANTZ ST500 COMPUTER
STEREO TUNER 156**
A high fidelity FM tuner with all the latest station search and memory facilities. Our reviewer found it "a real delight".

G.R.D. PAS 30 LOUDSPEAKERS 168
Danish drivers in Australian enclosures add up to value for money in a smallish speaker system.

general

**MICROS INVADE THE
COMMUNICATIONS WORLD 121**
Radio communications equipment is more versatile, easier to operate and service, thanks to the influence of microprocessor technology.

SHOPAROUND 85

IDEAS FOR EXPERIMENTERS 80
Mods to the ETI-152 Capacitance Meter; LED chasers; A 'no hands' organ.

SHORT CIRCUITS 32
Thermatic fan controller for a vehicle

**SPECIAL OFFER
C10 DATA CASSETTES 87**
Save up to 20% on quality data cassettes for your home computer.

IONOSPHERIC PREDICTIONS 128

ELECTRONICS BOOKS FROM ETI 164
Beginners' books, data books, circuit books etc.

**'DISCO LITE'
MAIL ORDER OFFER 138**
And now — the gadget you've been waiting for! It's a three-in-one light controller. Just the thing for parties, mood lighting, night light and just about anything you can think up.

PC BOARD PATTERNS 145

MINI-MART 146

KITS FOR PROJECTS 176

ETI SERVICES 177

DREGS 178

next month


PERMSTAT ANTI-STATIC RECORD CARE KIT

Record care products are legion and many claims are made as to their efficacy. Permostat is claimed to "... permanently remove static electricity from a gramophone record". And what's more, without adverse effect. Louis Challis explores this claim and comes up with a surprise!



OIL TEMPERATURE METER FOR YOUR CAR

Featuring a linear LED readout, like most of our recent vehicle projects, this instrument employs a readily available dipstick probe. No car should be without one ...

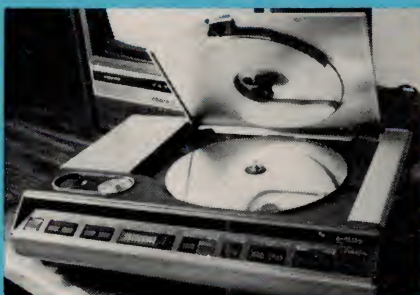

VIDEO DISC

What is it, what's inside the machines, where is it all going to end? Your questions answered. A fascinating rundown on this new consumer technology which will be upon us before you can say "National Panasonic, Philips, Pioneer, Kenwood, Magnavox, JVC ...".

150W MOSFET POWER AMPLIFIER MODULE

Would you believe less than 0.0008% distortion at 1kHz — and unconditionally stable? And that's conservative! This brilliant design forms the basis of our Series 5000 state-of-the-art stereo hi-fi system. If you've always wanted a really good hi-fi amp, this is it. Don't miss it!

Although these articles are in an advanced state of preparation, circumstances may affect the final content. However, we will make every attempt to include all features mentioned here.



Quality ★ ★ ★ ★

Price ★

Those who believe that a one star price will invariably dictate a similar result have obviously still to experience the union of Traminer and Rhine Riesling. **McWILLIAM'S**

STAGE & EFFECTS LIGHTING

ALL YOUR REQUIREMENTS AUSTRALIA WIDE

PAR 56

300w 240V

SEALED BEAM LANTERN



The PAR 56 — we brought this amazing lantern to Australia, and our version is the one that others try to copy. With a 2,000 hour life lamp, what could be more economical?

Look at these features:

- Large lamp rotating knob.
- New "easy glide" rotating assembly.
- Pole focus hook.
- New, hi strength colour runners.

To celebrate the end of the year, our agents are now offering very attractive deals on Par 56 lanterns — go and talk turkey NOW with your local Barratt Lighting Agent. The price will surprise you. Options: 4 door barndoor, colour wheel.

STAGE LIGHTING COURSE

The only intensive stage lighting course that covers all aspects of Stage and Effects Lighting. To be held on Saturday 17th and Sunday 18th January, 1981, at Barratt Lighting in Sydney.

Cost is \$25.00 including notes, refreshments, and a night out on the Saturday night. To enrol, contact Barratt Lighting now. Hurry, numbers are limited.

DIMMERS



The new Ceitex Dimmer Rack — 12 channels, 2000 watts per channel in 3 x 4 way modules. This dimmer rack uses Flakey iron toroids for RF suppression — interference with audio systems is virtually non-existent. The Ceitex rack will drive either positive or negative control dimmer control desks — thus almost any dimmer control desk now available, will mate the Ceitex rack.

Top level adjustment is a trim pot on the front of each module, making trimming easy. The rack can be housed in any standard equipment rack, or be free standing. It is of very rugged construction. Power requirement to drive this dimmer rack is 3 phase, 30 amps per phase — into an internal terminal block. Control connection is a 14 pin cannon twist lock — standard on some dimmer desks. A control cable up to 60 metres (more in some situations) can be used to connect this dimmer rack with a control desk.

JANDS DIMMER DESKS

These mate the Ceitex Rack.

JL 24/8 • 24 channels, 2 presets • 8 scenemasters on Pin Matrix • 3 channel chaser • Flash buttons.

JL 36/12 • 36 channels • 2 presets • 12 scenemasters on Pin Matrix • 3 channel chaser • Flash buttons.


We also have other 12 and 24 channel desks!

CHRISTMAS SPECIAL OSCILITES \$39

Limited Number

The Oscilite — a 3 channel chaser (sequencer).

• Variable rate • 450 watts per channel • Normal or shadow chase. Cheapest chase in Australia.

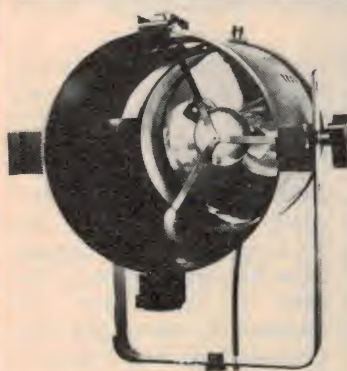

RAYLIGHT 500 WATT, 240V VERY TIGHT BEAM

Rock Industries think this is the brightest 500 watt lantern on the world market — in fact, we would love to be proven wrong! The Raylight is a fixed beam lantern — used mainly by Rock bands where extremely high intensity is needed.

LAMP: 500 watts, 240V, A1/244.

LANTERN HOUSING: Same can as the PAR 64 sealed beam lantern.

APPLICATION: Where very high intensity, tight-beam lighting is required.

ALL THE BEST FOR 1981!

DELTALIGHT IS COMING!

SYDNEY: Ceitex 2/33 College St, Gladesville (02) 896-2900

WOLLONGONG: Trilog Electronics 40 Princes Hwy, Fairy Meadow (042) 83-1219

NEWCASTLE: Your Move Lighting 37a Beaumont St, Hamilton (049) 69-3560

BRISBANE: Harvey Theatrical Lighting 21 Crosby Rd, Albion (07) 262-4622

BRISBANE: Rave Light & Sound 95 Bridge Rd, Fortitude Valley (07) 52-3310

GOLD COAST: Rave Audio Visual 2388 Gold Coast Hwy, Mermaid Beach (075) 38-3331

MELBOURNE: Clearlight Shows 17 Alex Ave, Moorabbin (03) 553-1446

MELBOURNE: Lighting Corporation 131 Brighton St, Richmond (03) 429-5122

ADELAIDE: Hiwatt Lighting 37 Angus St, Nth Adelaide 5006 (08) 212-2033

ADELAIDE: Hiwatt Lighting 37 Angus St, Adelaide 5000 (08) 212-2033

ACT: Topstage Productions 8/14 Kembla St, Fyshwick ACT 2609 (062) 80-4694

PERTH: Stagecraft 1142 Hay St, West Perth 6005 (09) 321-9363.

PERTH: Kosmic Sound 1074 Albany Hwy, Bentley (09) 361-8981

HOBART: Good Oil Sound 310 Liverpool St, Hobart (002) 23-5151

Also available Australia-wide at Strand Rank Electronic outlets.

Distributed by

Telex AA25298

BARRATT LIGHTING PTY. LTD.

140 Myrtle Street, Chippendale, NSW 2008.

NOW OPEN: New One-Stop Lighting Shop Showroom. All products ex-stock.

New Phone No. (02) 698-8499

College TV transmissions

A six week experiment in educational TV broadcasting was recently completed by Box Hill Technical College in Melbourne.

The programmes concentrated on teaching electronics, as a service to local amateurs, and were transmitted from the college's amateur repeater on channel 34 of the UHF band.

Transmitter power was only 10 watts and the broadcasts were only meant to cover a small area of east Melbourne, but reception reports indicate that they reached well beyond the target area and were even picked up in Geelong.

The programmes, which covered subjects like Oscilloscope Triggering, Oscillators, Phase Modulation and Frequency Modulation, were broadcast on two evenings each week. A unique feature of the transmissions was that students viewing the programmes could 'talk back' to the programme presenters via a direct telephone line into the studio.

All the work involved in the project, from construction of the transmitter to scripting and production of the programmes, was carried out by members of the college.

At the moment the college is still assessing the effectiveness of the project. They hope to use the experience gained in this six week experiment as the basis for producing a longer and perhaps continuous series of educational transmissions, beginning sometime within the next twelve

months.

Many schools in the area watched the transmissions with great interest and have already indicated their desire to become involved in the administration, planning or production of future programmes. Mr Ron Ritchie, the Acting Director of Technical Education, has also been an interested viewer. He sees the experiment as yet another aspect of an enlarging electronic communication and distribution system. As most schools already have television receivers, this must be one of the most cost effective methods of distribution available.

It would also be relatively simple to marry a teletext system into the transmissions. Up to 150 pages of information could be modulated onto the otherwise unused line synch part of the signal to reinforce, recapitulate or extend the programme material. Viewers would be able to go through the main points of a programme they had just watched at their own pace.

Such a facility would obviously improve the effective dissemination of Technical and Further Education (TAFE) programmes. With suitable written backup material, it would even be feasible for people to study TAFE courses at home without having to attend a college regularly.



Programmable answering device

The A-100 telephone answering machine from Answerex can be programmed to accept incoming messages of any length.

Considering how flustered some people get when they speak to an answering machine and how angry they are when cut off in mid-message, this is certainly a desirable feature. Even when their message time is up, callers encountering the A-100 will not be abruptly disconnected — a recorded message warns them when they have run out of time.

The public relations value of these features to a business is obvious, but Answerex are also expecting that the machine, with its competitive (less than \$200)

price tag, will appeal to a wide range of active individuals who will want to instal it in their homes.

The A-100 comes with a standard cassette, one side of which is professionally pre-recorded with forty messages, while the other is blank to allow users to record their own message to callers and leave whatever time they choose for incoming messages.

For more details, contact Answerex Communications Australia, 100 William St, Sydney 2000. (02) 357-2527.

Electronics courses at Newcastle

Newcastle Technical College is planning a wide range of electronics courses in 1981 for residents of Newcastle and the lower Hunter Valley.

In particular they are offering the Electronics Trades Course in block release format for students living anywhere in NSW. This is a three year course covering analogue and digital techniques for apprentices and others.

Post Trade courses include Television Receiver Servicing,

Semiconductor Electronics, Industrial Electronics, Post Trade Electronics and Industrial Instruments (conversion).

In addition there are a number of attractive special courses, including Two Way Radio, Microprocessor Principles, Servicing of Electronic Musical Instruments, Television Studio Techniques and others.

Full information on any of these courses for 1981 is available from:

The Senior Head Teacher, School of Applied Electricity — Electronics Division, Newcastle Technical College, Maitland Road, Tighes Hill, NSW 2297. Phone (049) 61 0461 ext. 367.

Superconductivity at room temperature

A metals researcher at a US Air Force base has accidentally discovered a compound which appears to superconduct at room temperature.

Fred W. Valdiek was experimenting with titanium boride crystals, deforming them under hydrostatic conditions in an effort to improve their ductility. When he finally achieved this aim by making crystals with an unusual and highly symmetrical structure, he set about looking at other properties and the superconductivity "... came along as a gift", as he put it.

He was using a four point probe to test for electrical resistance and found that in two directions the resistance was normal (titanium boride is usually a good conductor) but in the third direction the resistance was zero. Nor was this an unrepeatable fluke. Valdiek made other crystals using the same growth and deformation techniques and now has about fifteen crystals which all exhibit zero resistance in one direction.

Zero resistance, however, is

not the only property of a superconductor. To properly qualify for this description a material must also repel magnetic fields, a property known as the Meissner effect, which is essential for any practical applications of superconductors. Valdiek is setting up a coil to test for the Meissner effect and he claims to have already seen magnetic repulsion caused by the fields in his electron microscope.

At the moment physicists can only speculate about the mode of conduction in the new material. General thermodynamic considerations seem to rule out the possibility that electron Cooper pairs are being formed (as happens in low temperature superconductors), but if conduction is by more exotic means like exciton interaction or electron-hole pairs, then room temperature superconductivity does not violate accepted physical theory.



New National video recorder

National Panasonic have recently released their third generation home video recorder, a lightweight model weighing less than 13 kg and incorporating several unique features.

The model NV-7000 is a VHS recorder with a four hour record and playback ability. The video signal to noise ratio is 43 dB and Double Dolby circuitry gives the machine an audio S/N ratio of 50 dB.

Four direct drive motors are used, the video head cylinder motor being quartz locked to give an accuracy of 99.999%, according to National.

The standard model comes with a cable-linked remote con-

trol unit that in addition to the normal functions can also be used to review or cue at nine times normal speed, to play at half or double speed and to display single frames.

Other features claimed to be unique to this model are an antenna signal booster and an auto-edit function which ensures smooth continuity between programmes. The NV-7000 has a recommended retail price of \$1500 and comes with a two year warranty on all parts except the heads, which are guaranteed for twelve months.



New ETI staff members

Pictured here are two new members of our advertising sales staff in Melbourne.

Bill Philpott has just been appointed our Victorian Sales Manager. Bill began his career in the Royal Australian Navy, where he was trained in electronic, electrical and submarine communications theory. On leaving the service in 1976 he worked for four years as a marketing consultant for Computer Technology.

Virginia Salman has also recently been appointed to our Melbourne sales staff. She was formerly secretary to Southern States Executive Manager, Tom Bray, who was so impressed with her abilities that he promoted her to her new position. Virginia, who is tall and athletic, is married with two children. She enjoys playing tennis and riding bicycles, loves music and is very interested in computers.

Laser depth sounder

An airborne laser depth sounder will help ease the burden of hydrographic survey work around Australia's coasts.


The equipment, which is believed to be in advance of anything else in the Western world, was developed by the Defence Research Institute at Salisbury, SA. Known as WHELADS II it works by measuring the time interval between the reflection of a laser beam from the sea surface and the bottom. Multiplying this interval by the velocity of light in sea water gives the depth.

Conventional acoustic sounders work on a similar principle, but because they use sound waves they must be carried on

surface vessels, which makes the task of surveying Australia's vast continental shelf a long and laborious one.

All measured depths must of course be accompanied by accurate positional information, and the generation of such data (accurate to within a few metres) is an essential part of the system.

Installed in a RAAF Dakota, WHELADS II has been tested over North Queensland waters and is currently on trial off South Australia.

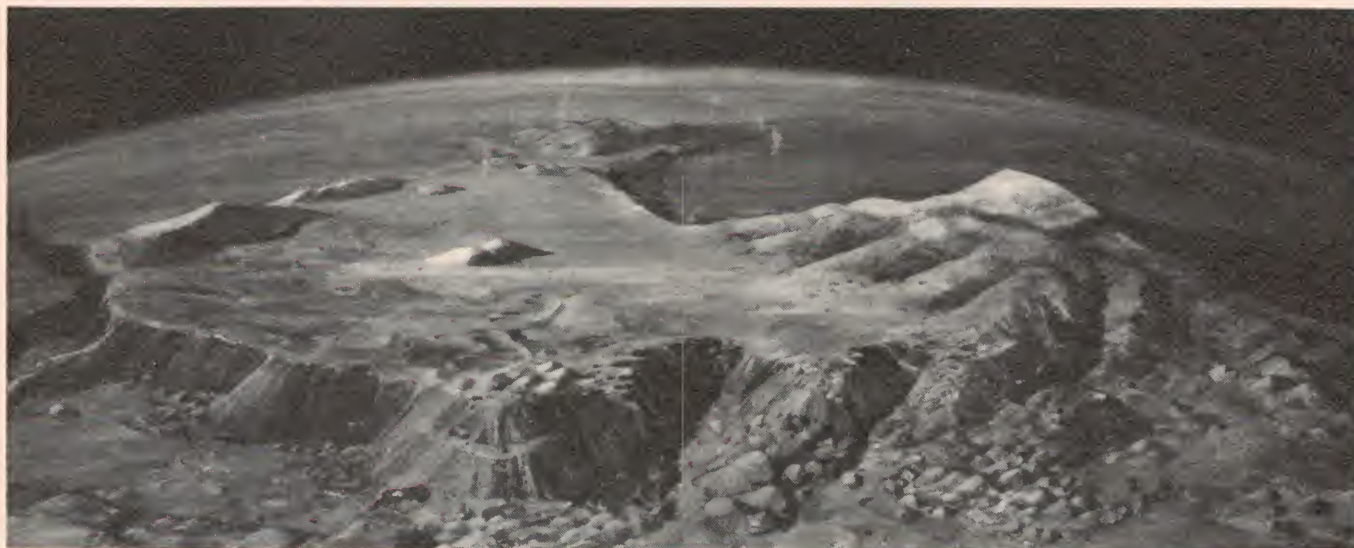

Venusian surface mapped by orbiter radar

The Pioneer Venus craft (see ETI May 1979) has been orbiting the planet since December 1978 during which time its radar has penetrated the thick clouds of the planet to provide information about large surface features.

By May 18th, 1980 the Orbiter had mapped 93% of the Venusian surface from 73° North to 63° South latitude, missing relatively small circular regions around each pole of the planet. The work should continue for a few more years.

Prior to the Pioneer Orbiter work, less than 1% of Venus' surface had been detected by powerful Earth-based radar techniques.

The most prominent features on Venus are the highland regions which are comparable to the continents of the Earth. One of these, Ishtar Terra, in the northern hemisphere is the size of Australia, while another, Aphrodite Terra, is as large as half of Africa.

There is no 'sea level' on Venus, but 60% of the surface consists of relatively flat rolling plains lying at a radial distance of 6050 km from the centre of the planet. This 6050 km radius is used as a reference distance like sea level on the Earth.

The lowlands of Venus may be compared with the oceanic areas of the Earth, but only 16% of the surface lies below the 6050 km radius whereas on Earth nearly two-thirds of the surface is covered by the oceans.

The lowest point is 2.9 km below the reference level.

The highest point, Maxwell Montes, in Ishtar Terra is 10.8 km (35 400 feet) above the reference level and is therefore higher than Mount Everest.

Only about 8% of the planet's surface is true "highlands" which may resemble the corresponding areas of low-density rock on the Earth.

An international group is naming the surface features after mythical goddesses. Ishtar (centred at 65° North) is named after the Babylonian goddess of love and war, daughter of the Moon and sister of the Sun. Aphrodite (centred at 5° South)

is another name for Venus itself.

Minor features will be named after other mythical female figures and still smaller features after famous women who are no longer living. However, the names have so far been allocated on a tentative basis.

Other major features on Venus include Beta Regio at 30° North which appears to consist of two huge shield-shaped volcanoes larger than the Hawaii-Midway chain on the Earth; it is probably situated on a fault line running from 40° North to 50° South latitude.


There are two huge adjoining mountains (smooth on the surface and shaped like the very wide-based Hawaiian volcanoes) which cover a North-South distance of some 2100 km. The Soviet Venera 9

and 10 craft landed in this region and found radioactivity similar to that of volcanic rocks on the Earth.

These Theia Mons (northerly) and Rhea Mons (Southerly) mountains rise to about 4 km above the reference level. Alpha Regio is a smaller highland region about 25° South of the equator.

When considering the maps of the Venusian surface, readers should remember that it would not have been possible to obtain this information without modern electronics, space-borne radar and a highly efficient inter-planetary communications network. Complex data reduction systems were employed to convert the raw data into acceptable images.

Brian Dance

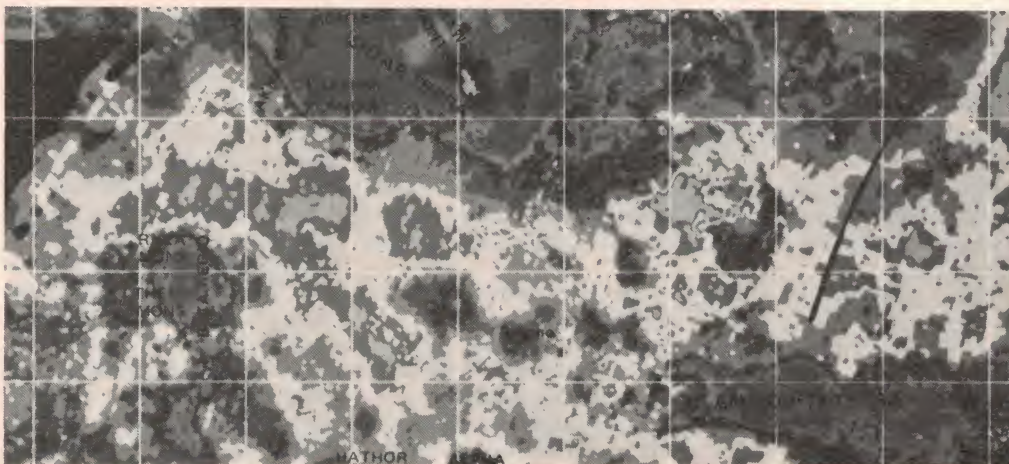



Small Fridge. Big Deal.

Space age breakthrough creates a new line of Koolatron electronic portable refrigerators and food warmers.

You're nicely away on your long-awaited vacation, camping trip or long weekend with the family. You're comfortably cruising in your car, van or rec. vehicle along a busy interstate with few rest stops or restaurants. You guessed it... the kids want to stop for a snack. But your Koolatron P34 or P34A is full of sandwiches, cold drinks, fried chicken... home made, fresh and cold. The family helps themselves and you've saved valuable vacation time and another expensive restaurant bill.

You're a commuter, a salesman or a trucker and you spend many hours in your vehicle daily. Now with your amazing Koolatron plugged in beside you, you open the lid and instantly fresh food and drinks are at your fingertips. Just for the price of a good cooler and one or two seasons of buying ice, (or about 10 family restaurant meals!), all the marvels of home refrigeration are available electronically. An amazing space-age miracle... the thermo-electric solid state module... makes these portable refrigerators possible.

These amazing heat pumps have not only gone to the moon, but have provided the breakthrough for Koolatron's portable fridge revolution.

THOUSANDS IN USE

Koolatron now has tens of thousands of electronic fridges in use worldwide using these same powerful solid state modules. Built to take it, two of these electronic modules are encased in tough, plastic insulated chests that are designed to be rugged and trouble-free. Non-rusting hinges and latches prevent corrosion in salt water environments. And with only one moving part (a small 12 volt fan) Koolatron's portables seldom see a service depot. Now you can enjoy Koolatron's whole family of electronic portable refrigerators and food warmers that eliminate costly ice and provide "home refrigeration" convenience at sane and sensible prices.

THE PERFECT RECREATIONAL FRIDGE

MODEL P34
\$219.00



Holds over 20 kg food or 48 cans or 12 bottles of wine. Refrigerates in air temperatures up to 35°C. Tough ABS case in Sand Beige with non-corroding latches and handle. Large 33 litre capacity. Weighs only 7½ kg when empty. Operates on 12 volts DC with supplied power cord or from optional 240 volt adaptor.

Exterior: 53cm x 41cm x 41cm
Interior: 41cm x 31cm x 31cm

As a travel fridge Koolatron keeps food and drinks fresh and cold wherever you go. Carry frozen food, medical samples, insulin, dietetic food. Photographers use it for films. Boatowners keep your drinks cold and food fresh without going ashore for hard to get and cumbersome ice. Operate Koolatron up to six hours from your battery and still start your engine. With the power off, Koolatron keeps everything cold and fresh for many hours in its well insulated case. Imagine dry dependable refrigeration with the size to match your travelling and camping needs. Fits into any boat, van, truck, camper or back seat of your car. Ideal for aeroplanes. Unaffected by motion or tilting. A natural for drive-in movies, picnics, sporting events. With our optional 240 volt adaptor you'll also find endless uses wherever household current is available... at your weekend... as a bar fridge... in your motel room for a midnight snack or drink... as an office fridge... or beside your pool. Use as auxiliary fridge at your next party. Dazzle your friends with the latest space age technology.

THE ULTIMATE RECREATIONAL REFRIGERATOR & FOOD WARMER

MODEL P34A
\$239.00



The same size, colour, weight and capacity as the P34 but includes food warming features, fully adjustable temperature control and low battery warning indicator.

The P34A is our top of the line portable. It heats, it refrigerates and with specially designed electronic circuit control (patent applied for) it allows you to dial a complete range of temperatures from very cold to very warm. You wine buffs will find it ideal to keep up to 12 bottles of wine at just the right temperature. In winter take your favourite casserole and hot food for the whole family with you and save on restaurant meals. Mothers can keep baby's formula just right for baby. Low battery indicator warns you when battery needs a recharge and the sensing circuits efficiently control your power consumption to save on battery drain. This is our best of the line recreational fridge and food warmer with all the bells and whistles for the discerning buyer who demands quality, size and versatility.

WHY IS KOOLATRON BETTER VALUE THAN ANY OTHER PORTABLE FRIDGE?

The full size family of Koolatron portables are specially designed for the serious traveller and outdoors man. They will refrigerate more than 3 times the contents of the Sheen and 4 times the contents of the Electrolux Sunnycool. You can fit more drinks (48 small cans or 12 wine bottles) or more food (20 kg) into your Koolatron than into most other portable fridges, yet Koolatron costs a lot less for it's size. At the same time it consumes no more power under full load than other smaller units.

WE MAKE YOU A PROMISE

If you can find any other 12VDC or gas operated portable refrigerator that is lighter, bigger and costs less than Koolatron—we will buy it for you. No questions asked.

ORDER TODAY WITHOUT ANY OBLIGATION AND 21 DAY MONEY BACK GUARANTEE

Simply complete the attached order form or phone collect and we will rush you your Koolatron on our no risk 21 day trial offer. Each unit comes with complete instructions and a written 1 year warranty. In the unlikely event you ever need service we have service centres in all capital cities and overseas. When you receive your Koolatron use it constantly for a full 3 weeks without risk.

If you ordered our optional 240 volt adaptor, plug it in, then use your portable immediately as a bar fridge or around the patio or pool. Next plug your fridge into your car or van. Take your family out for a weekend trip. Enjoy fresh home cooked food as you thumb your nose at expensive restaurants and takeaways. If after you have thoroughly tested it, you don't agree that your Koolatron represents a major breakthrough that will save you time money and bother for years to come, send it back for a full refund. You can't lose... we guarantee it.

So be among the thousands to discover that the ice age is over. Don't waste another dollar on ice... order your Koolatron without any obligation today.



CREDIT CARD HOLDERS—You can phone your order reverse charge

(03) 645 2068

Koolatron Industries

297 Williamstown Road Port Melbourne 3207
409 Sussex Street Sydney 2000

Or use this handy order coupon.

Koolatron INDUSTRIES

297 Williamstown Road,
Port Melbourne, 3207 Telex 32571
Send me with full refund privileges:

- _____ Koolatron P34 at \$219.00.
- _____ Koolatron P34A at \$239.00.
- _____ Koolatron 240V Adaptor at \$37.50.

Please add \$7.50 for handling and delivery per unit.
No charge for shipping A.C. adaptor if ordered with unit.

I understand that I may return any item undamaged within 21 days and receive a full refund if I am not satisfied.

I enclose my cheque or money order for \$ _____ or please charge it to my

- ☐ Bankcard ☐ Diners Club
- ☐ American Express

A/c Number _____

Expiry Date _____

Signature _____
(necessary to send merchandise)

NAME _____

ADDRESS _____

CITY _____

CODE _____

ETI 12/80



Video image processor reduces noise

The Australian company, Dindima, have announced the development of a new method of processing video images to improve the signal-to-noise ratio by 45 dB.

A patent application has been made for the Arlunya TF4000 digital temporal filter which is expected to have applications in the fields of medicine, astronomy, nuclear physics, and industry.

The instrument stores a video image on a 512x512 picture element matrix, applying a noise integration algorithm and 256 grey scale levels on an element by element basis. The processor samples the image at 14.5 MHz over a period selected by the operator, ranging from 0.3 s to 82 s.

The Arlunya TF4000 is unique in that it can effectively eliminate noise on a real time basis. This makes the instrument especially useful in the image processing of X-ray fluoroscopy where it enables the minimum dosage of radiation to be used, for example in the

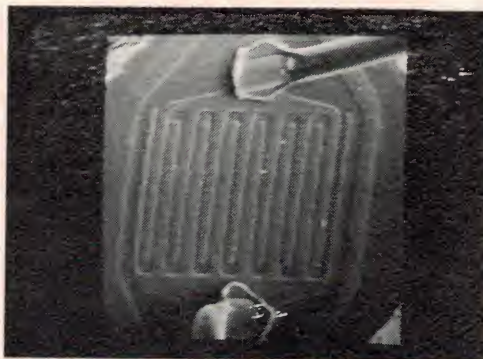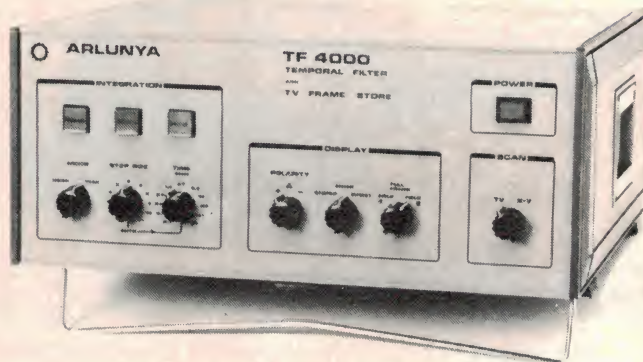

The same image before and after processing by the TF4000.

examination of a patient with suspected cancer.

It is hoped that the instrument will have considerable export potential and although it is new it is already being sold in the UK as an image intensifier and noise reduction system for electron microscopy.

Further information can be obtained from Dindima Group Pty Ltd, P.O. Box 106, Vermont, Vic 3133.

Californian power industry backs solar cells

Westinghouse announce that two of the major Californian electric power companies will fund the development of an automatic solar cell production plant.

The plant will produce single crystal silicon ribbon, known as dendritic web, directly from molten silicon. The process yields a long, smooth and pure ribbon which, unlike ingots, does not need to be sliced, polished and cleaned. This saves time and avoids wasting expensive high purity silicon.


Solar cells made from dendritic web have already achieved conversion efficiencies approaching 16 per cent and Westinghouse expect that improvements currently underway will take this figure over 18 per cent, which in midday sunshine means a power output around 170 watts per square metre.

Phase one of the project, a pilot facility with a capacity of 50 kilowatts per year, will have operating costs of about US\$1 million in its first year of production, of which Pacific Gas and Electric and Southern California Edison will each provide \$300 000. Under the agreement, the utilities will receive their first cells later this year to use in their own research and development programmes.

Once the first stage is completed, Westinghouse plan to expand to a fully automated 25 000 kilowatt per year production line, which will be the basic module for a full scale production plant.

Attenuate me baby !

RF attenuators are an indispensable instrument in the shack of every true ham and experimenter.

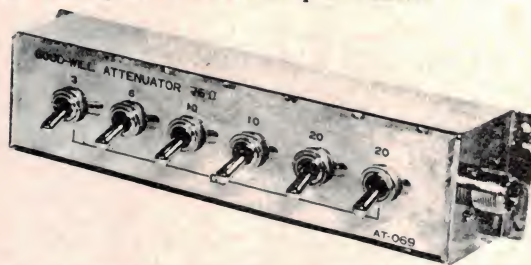

They're often hard to find in the shops, but if you look carefully in Emtronics' George St, Sydney store you'll find two models from the Goodwill company.

Models AT-069 and AT-872 are available in 50 and 75 ohm impedances and are specified to work from dc to 250 MHz.


The AT-069 has a maximum attenuation of 69 dB in six steps — 3, 6, 10, 10, 20 and 20 dB. The AT-872 has eight steps of 1, 2, 3, 6, 10, 10, 20 and 20 dB for a maximum of 72 dB.

Both models can be obtained with N, BNC or S0239 connectors, although the latter are favoured. Both measure 220 mm long by 50 mm square.

Applications include measuring receiver and preamp noise figure, checking or measuring relative antenna gain, reducing front end overload in receivers, providing calibrated steps from a signal generator output, etc.

See Emtronics at 649 George St, Sydney 2000 (P.O. Box K21, Haymarket 2000). (02) 211-0531.

— PTY. LTD. —
DEL SOUND
CLIFF
NEW PRODUCTS
AND SPECIALS



CABINET
HANDLES
\$90/100

SLIDER
POT KNOBS
from
\$30/100



CONTROL KNOBS
BLACK BODY
COLOURED CAPS
from \$28/100

JACK SOCKETS
INSULATED
COLOURS
from \$31/100



T03
INSULATOR PADS
\$10/100

C18 KNOBS
BLACK BODY
COLOURED CAPS
\$36/100



C18
POT-NUT
COVER


C22 KNOB
BLACK BODY
COLOURED CAPS



For further information, local agents and
wholesale prices, write to the Australian
Importers:

DELSOUND PTY. LTD.
 1 Wickham Tce. (Cnr. Wharf St.)
 Brisbane. Phone 229-6155.
 Wholesale and Retail suppliers of
 Electronic Hardware and
 Components.

HOBBY-BLOX™
 The modular, circuit
 building system for
 electronic hobbyists.

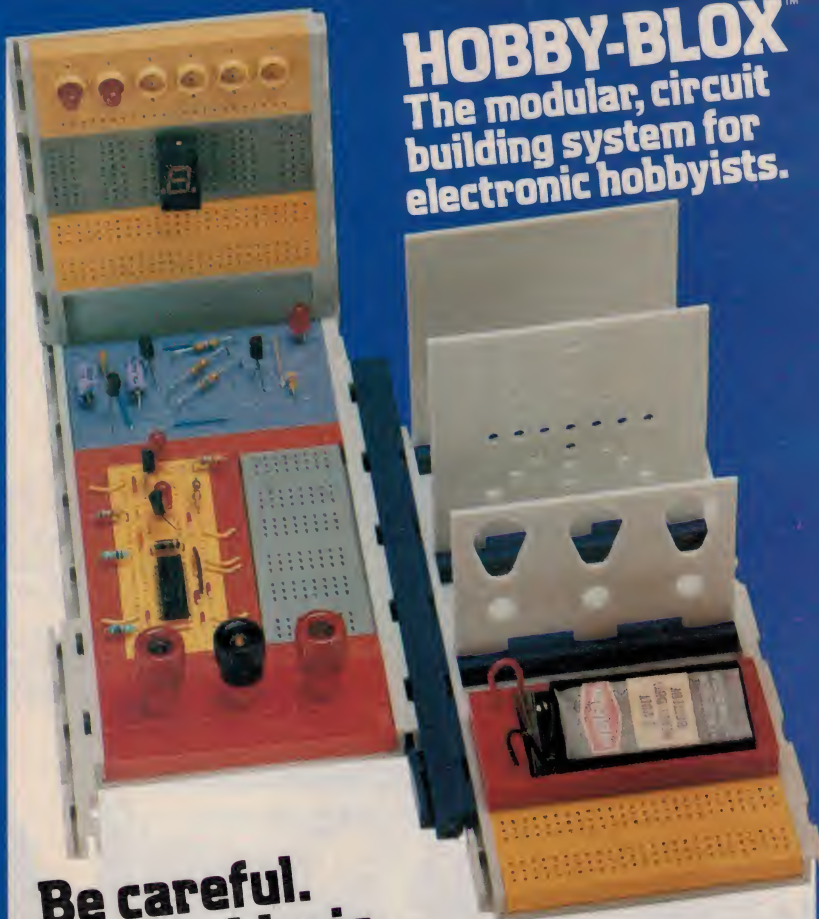

**Be careful.
 Your hobby is
 about to become an obsession.**

It can happen! Once you start
using Hobby-Blox™, you'll get
more joy than ever from
electronics.

The 14 modular units in the
solderless, Hobby-Blox system
allow you to complete projects
faster, easier. Help you to move
on to more and more sophis-
ticated projects. Faster, easier.

The modules are color-coded
and cross indexed. There are
terminal, distribution and bus
strips. Speaker panels, binding
posts... everything you see
illustrated here.

And for the beginning hobbyist,
there are two starter packs.
One for integrated circuit
projects, the other for those
involving discrete components.
And each comes with an illus-
trated booklet describing 10
projects.

If you thought you were into
electronics, look out. Once you
get into Hobby-Blox, you're
hooked for good!

Patents Pending.
 © A.P. PRODUCTS INCORPORATED 1980



A.P. PRODUCTS
INCORPORATED
 9450 Pineneedle Drive
 P.O. Box 603
 Mentor, Ohio 44060
 (216) 354-2101

**Free Project-of-the-Month
 to Hobby-Blox purchasers!**

**For a free catalog,
 contact your local
 HOBBY-BLOX™ dealer:**

N.E.T. PTY. LTD.
 92 Woodfield Boulevard
 Caringbah, N.S.W. 2229
 TEL: 525-6090

RIFA PTY. LTD.
 P.O. Box 485
 Cross House, 2 Cross Street
 Hurstville, N.S.W. 2220
 TEL: 570-8122

RIFA PTY. LTD.
 P.O. Box 95
 202 Bell Street
 Preston, Victoria 3072
 TEL: (03) 480-1211

AP-58 A

And you thought just for old



1. Not the old school bus, not the blunderbus. This is the Fun Bus, and it's fun all the way. With one of the world's most exciting and beautiful countries at your feet, travelling in the Fun Bus can make your holiday even more memorable.

Mix with people your own age, share their interests, and live the good life as you cover the country from top to bottom. You'll never be in better company.

There's much more to New Zealand than mudholes and geysers. Now, read on.

2. Go where no man has gone before. Four wheel drive it through/up/across/around/over some of the most unbelievable roads and no roads you're ever likely to meet.



3. Rent a bike. Take it by the hour or the week, in Christchurch, or from there into the country.

There are even tandems for hire if that's your idea of togetherness.



4. Before the wheel came the walk, and the Routeburn Trek is one of the most stunning ways to take one. A four day guided hike through two of New Zealand's greatest National Parks, Mt. Aspiring and Fiordland. This is not exactly a Sunday stroll.



5. Get into training between April and December. Fourteen consecutive days of train, bus and ferry travel to and from almost any part of New Zealand for just \$8 a day.

6. Or fly like a bird. New Zealand Air Pass allows you unlimited travel throughout New Zealand.

If you have 14 days, \$170 and lots of stamina you can see up to 23 towns and cities.



New Zealand was geysers.

7. One of man's favourite pastimes. You'll find kiwis of all kinds in New Zealand. Some feathered, all friendly. It's said that the after-dark dance rituals are well worth the experiencing.



8. A snow job. Take to the skis on some of the world's best snow fields. Places with names as exciting as the fields and the facilities - Tekapo, Mt. Hutt, Mt. Ruapehu, Coronet Peak, etc. And a bribe. It can be cheaper to ski here, including airfare, than in Australia. Speak to Air New Zealand or Qantas.

9. Let Huka Lodge capture you. Home grown vegetables. New Zealand game. Hunting. Trout fishing and horseback riding. It's on the Waikato River and the Queen Mother, General MacArthur and Jack Nicklaus discovered it before you.



10. Get a horse. Take a New Zealand Farm Holiday. (There are three kinds: Children Only, Live-in and Farm Cottages'.) On all of them you'll have a good country time. On a lot of them you can take a horse for trekking or hacking. You may even be persuaded to lend a hand on hoof.



11. Where better to be a hell's angel than in an earthly paradise! There are motor bikes for hire in Christchurch and the price for freedom on wheels is really very cheap.



12. Well that's some of the things to do in New Zealand. Now for some of the ways to get there. Air New Zealand and Qantas have about 100 flights a week across the Tasman.

They also have a whole lot more detailed information.

Contact Air New Zealand or Qantas or your local travel agent. And have a good holiday.



QFA1399LG

pH — the acid test

Many chemical and biological systems depend critically on a parameter known as pH. This article explains what pH means, outlines how it is measured and investigates some areas where it is important.

**Elaine Ray &
William Fisher**

THE IMPORTANCE of acids and alkalis is well known, as is the fact that some acids and alkalis are stronger than others — that is, they react more vigorously with other substances. But what is it that makes sulphuric acid, for example, stronger than acetic acid? And how can we quantify their strengths?

Dissociation


All acids have at least one hydrogen atom that tends to break away from the molecule when the acid is dissolved in water. In doing so it leaves behind an electron and becomes a positively

charged hydrogen ion. It is these free hydrogen ions that are responsible for the chemical properties of acids, and their relative numbers determine the strength of the acid in question.


For example, acetic acid (CH_3COOH) dissolved in water tends to partly dissociate into positive hydrogen ions (H^+) and negative acetate residues (CH_3COO^-), thus:



and sulphuric acid dissociates almost completely in water into hydrogen ions and sulphate residues thus:



Alkalis are extreme examples of a class of substances known as bases. Bases are like converses of acids. When they are dissolved in water they tend to break up into a negatively charged hydroxyl ion (OH^-) and a positively charged residue. For example the strong alkali potassium hydroxide (KOH) breaks up thus:



and the weaker base calcium hydroxide (lime) partly breaks up into calcium and



— to page 19 ►



A high quality portable pH meter with a liquid crystal display that directly indicates the pH of the solution under test.

INTRODUCING HOBBY-BLOX™

The new modular circuit building system designed especially for electronic hobbyists.

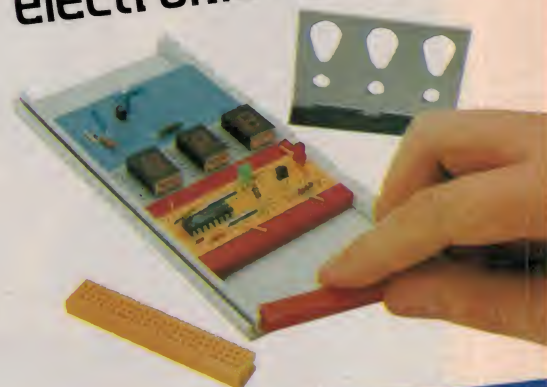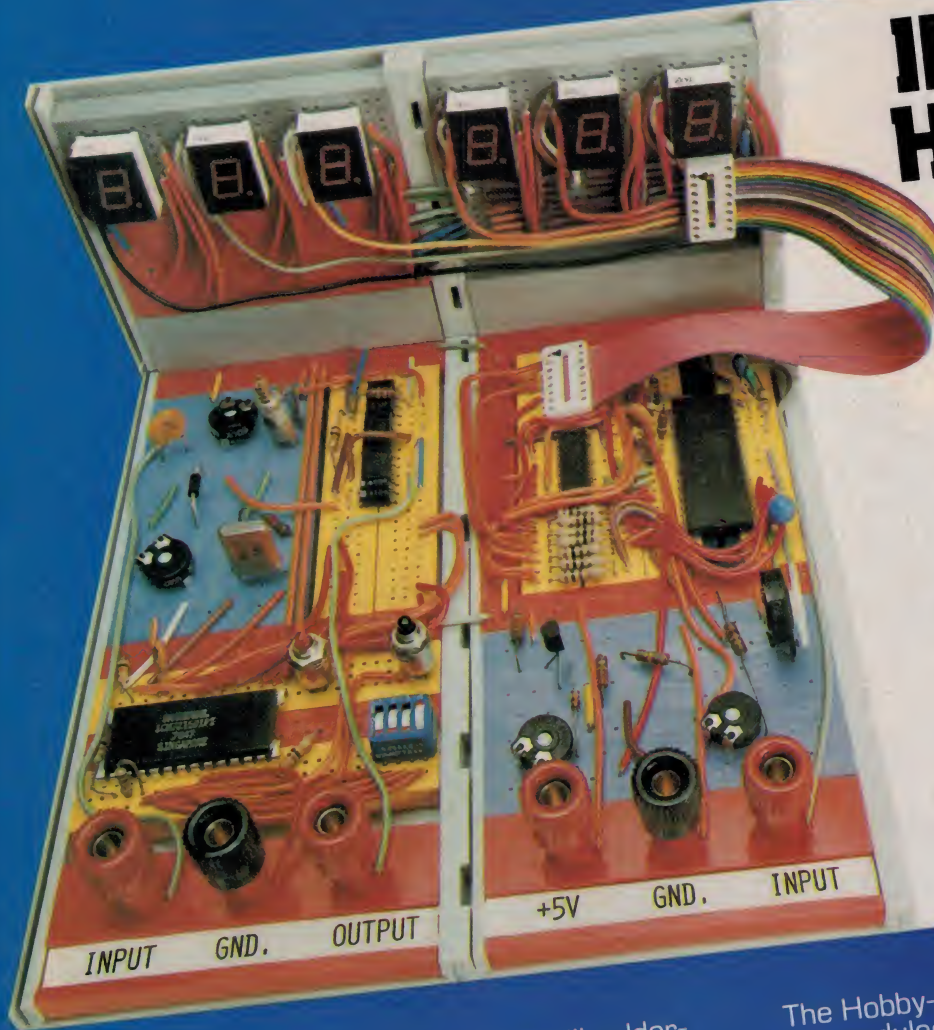

Until now, you had to buy "professional" solderless breadboards for your projects and pay "professional" prices. Now there's Hobby-Blox, a totally new circuit-building system that's not only economically priced but offers many more advantages to the hobbyist.

At the core of the system are two expandable starter packs, one for discrete component projects, the other for integrated circuit projects. Each comes with a number of Hobby-Blox modules that fit into a tray and an illustrated project booklet. In addition, the system includes 14 separate component packs you can purchase individually — terminal, distribution and bus strips, speaker panels, binding posts, etc.

The Hobby-Blox system is easy to use because the modules are color-keyed and letter/number indexed. It's time-saving, because they're solderless. It's compatible with DIP's of all sizes and a wide variety of discrete components. And you save money, because the parts can be reused again and again.

How far can you go with the Hobby-Blox system? Take a look at the example above. Then you'll know why we say, "your only limit is your own imagination!"

Patents Pending
© A P PRODUCTS INCORPORATED 1980



A P PRODUCTS INCORPORATED
1359 West Jackson Street
Painesville, Ohio 44077
(216) 354-2101

For a free catalog,
contact your local
HOBBY-BLOX™ dealer:

N.E.T. PTY. LTD.
92 Woodfield Boulevard
Caringbah, N.S.W. 2229
TEL: 525-6090

RIFA PTY. LTD.
P.O. Box 485
Cross House, 2 Cross Street
Hurstville, N.S.W. 2220
TEL: 570-8122

RIFA PTY. LTD.
P.O. Box 95
202 Bell Street
Preston, Victoria 3072
TEL: (03) 480-1211



Digital IC Probe & Logic Pulser

PRB-1 DIGITAL LOGIC PROBE

Compatible with DTL, TTL CMOS, MOS and Microprocessors using a 4 to 15V power supply. Thresholds automatically programmed. Automatic resetting memory. No adjustment required. Visual indication of logic levels, using LED's to show high, low, bad level or open circuit logic and pulses. Highly sophisticated, shirt pocket portable (protective tip cap and removable coil cord).

- Automatic threshold resetting • DE to > 50 MHz
- Compatible with all logic families 4-15 VDC • 10 Nsec. pulse response
- Supply O.V.P. to ± 70 VDC • 120 K Ω impedance
- No switches/no calibration • Automatic pulse stretching to 50 Msec.
- Open circuit detection • Automatic resetting memory
- Range extended to 15-25 VDC with optional PA-1 adapter

PLS-1 LOGIC PULSER

The PLS-1 logic pulser will superimpose a dynamic pulse train (20 pps) or a single pulse onto the circuit node under test. There is no need to unsolder pins or cut printed-circuit traces even when these nodes are being clamped by digital outputs.

PLS-1 is a multi-mode, high current pulse generator packaged in a hand-held shirt pocket portable instrument. It can source or sink sufficient current to force saturated output transistors in digital circuits into the opposite logic state. Signal injection is by means of a pushbutton switch near the probe tip. When the button is depressed, a single high-going or low-going pulse of 2 μ sec wide is delivered to the circuit node under test. Pulse polarity is automatic: high nodes are pulsed low and low nodes are pulsed high. Holding the button down delivers a series of pulses of 20 pps to the circuit under test.

- High input impedance (off state) 1 meg ohm • Multi mode-single pulses or pulse trains
- Low output impedance (active state) 2 ohms • Automatic polarity sensing
- Output pulse width 2 μ sec nominal • Automatic current limiting, 7 amps nominal
- Input over voltage protection + 50 volts • Automatically programmed output level
- Finger tip push button actuated • Circuit powered
- Power lead reversal protection • No adjustments required
- Multi-family RTL, DTL, TTL, CMOS, MOS and Microprocessors.

AMPEC ELECTRONICS PTY. LTD.


1 Wellington St, Rozelle, 2039. PO Box 132, Rozelle, 2039. Ph (02) 818-1166.

Available from: NSW Radio Despatch Service, 211-0191. Applied Technology, 487-2711. David Reid Electronics, 29-6601. Electronics (Distributors), 636-6052. Martin De Launay, 29-5834. VIC: Stewart Electronics, 534-3733. Ellistronics, 602-3282. John Pearce, 528-5240. Ritronics, 489-8131. QLD: N.S. Electronics, 36-5061. WA: Reserve Electronics, 275-2377. Taimac, 328-1988.



pH electrodes are made in a variety of shapes and sizes to suit different applications. At the rear of the picture are two cans of 'buffer solutions' — liquids whose pH does not change much when they are contaminated. Buffer solutions are used to calibrate pH electrodes.

hydroxyl ions, thus:



Bases and acids in the same solution tend to neutralise each other. The free hydrogen ions from the acid combine with the free hydroxyl ions from the base to form molecules of water, thus:



Neutrality and activity

The reaction between hydrogen and hydroxyl ions can also proceed in the other direction — that is, water molecules can break up again into free hydrogen and hydroxyl ions. There is only a slight tendency for this to happen, however. In pure water at room temperature only about one water molecule in ten million dissociates into ions. In other words, the concentration of free hydrogen ions in pure water is one part in ten million. This concentration of hydrogen ions is known as a *neutral solution*.

If an acid is dissolved in water, the solution will no longer be neutral — there will be more hydrogen ions because of the dissociation of the acid. Dissolved bases will initially result in a

solution that has more hydroxyl ions than neutral water, but these hydroxyl ions will tend to combine with any free hydrogen ions to form H_2O molecules. The net result is that the number of free hydrogen ions in a basic solution is *lower* than in neutral water.

Clearly if we can measure the number of free hydrogen ions in a solution we can find out if it is acidic or basic, and to what extent. Actually what we will be interested in is not the absolute number of free hydrogen ions, but their relative numbers, i.e. their concentration.

For reasons of mathematical convenience and logical purity, chemists prefer to work with a quantity known as the *activity* of hydrogen ions. Since the activity is generally proportional to the concentration, the exact distinction between the two terms need not concern us here.

The range of possible values for hydrogen ion activity is very wide, from 10^{-14} for the strongest acid solution to 10^{-1} for the strongest alkali. This leads to numbers that are awkward to write and even more awkward to speak (try saying 2.76×10^{-11} quickly!).

The pH notation, which was introduced in 1909 by the Danish chemist

S.P.L. Sorensen, makes things a bit easier. It defines pH as the negative logarithm of the hydrogen ion activity, i.e.

$$\text{pH} = -\log A \quad (\text{where } A \text{ is the hydrogen ion activity})$$

Low values of pH indicate acidity, high values alkalinity. Neutral water is pH7.

pH measurement

The best way to measure the hydrogen ion activity of a solution is to use that solution as part of an electric cell. Before 1937 this was commonly done with a 'hydrogen cell'.

When a platinum electrode is dipped into a solution containing H^+ ions, the positively charged ions tend to attract negatively charged electrons out of the metal. The higher the activity of the ions, the stronger the attraction of the solution for the electrons.

One way to compare the H^+ activities of two different solutions is to put an electrode into each solution and join the electrodes with a wire. The solution with the higher activity will exert a greater pull on the electrons and a current will flow through the wire. If the wire is broken, a voltage will appear ►

between the two break points. This voltage is a measure of the hydrogen ion activity and hence of the pH.

There are considerable practical and theoretical difficulties involved in the 'hydrogen cell' method of measurement described above. The invention of the 'glass electrode' pH meter in 1937 overcame these difficulties and was a boon to chemists.

A typical glass electrode consists of a porous glass bulb containing a saturated solution of silver chloride (AgCl) in which a silver electrode is immersed. This electrode is connected to one terminal of a voltmeter, whose other

terminal is wired to another electrode that sits in a reference solution. Because the silver ions in the silver chloride solution tend to suck electrons from one electrode and the positive ions in the reference solution suck electrons from the other electrode at fixed but different rates, the voltmeter normally reads some steady voltage.

The glass bulb containing the silver chloride is immersed in the solution whose pH is being measured. The hydrogen ions in the latter solution migrate across the glass membrane of the bulb and alter the activity of the silver chloride solution, thereby altering the attraction of the silver chloride solution for the electrons in the silver electrode dipped into it. Consequently, the reading on the voltmeter will alter.

Careful design can result in a glass electrode pH meter which generates a voltage that is linearly proportional to the pH of the solution being tested. (Sometimes this linearity is achieved by putting the test solution in contact with the reference solution as well, via a 'bridge' of some electrically conducting salt).

pH in medicine


The complex chemical interactions that

take place in the human body are very sensitive to changes in pH so the body is constantly trying to keep the pH of its blood within the narrow range from 7.38 to 7.42.

A complicated feedback system, controlled by the endocrine glands, operates to counteract any abnormal deviations in blood pH, which would otherwise be traumatic. For example, after a heavy intake of alcohol, which makes the blood over-acid, the lungs breathe deeper and faster so as to expel carbon dioxide (which makes carbonic acid when it is dissolved in the blood) and the kidneys extract more carbonic acid from the blood and pass it into the bladder where it can do no harm.

Acidosis and alkalosis, which are the medical terms for abnormally low and abnormally high blood pH, are generally indications of serious diseases like diabetes, kidney or lung failure.

Polio victims and others in artificial respirators sometimes suffer from an excessive build-up of carbon dioxide in the blood (because their lungs cannot excrete it). Fortunately this can easily be detected in time for corrective action to be taken by routinely monitoring the blood pH. The amount of blood required for this purpose is quite small — a few

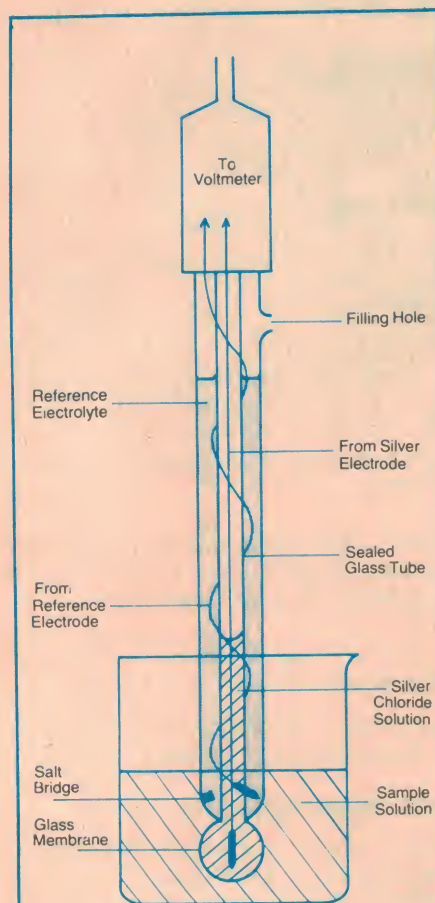

A GLASS ELECTRODE

Above is a cross-sectional diagram of a typical pH electrode or 'probe'. It consists of a glass membrane in the shape of a bulb, inside which is a solution of silver chloride and a silver metal electrode. Around the stem of the probe is a refillable reservoir which contains a reference solution and a reference metal electrode.

The two electrodes are connected to the terminals of a voltmeter, which normally reads a steady voltage. When the probe is immersed in the sample solution, some ions from the sample migrate across the glass membrane and alter the activity of the silver chloride, so that the voltmeter reading alters.



Two special pH probes for medical applications. The upper one is a gastric pH probe, designed to pass through a patient's nose and the lower probe is used for blood analysis.

millilitres, which must be syringed directly to a gas analyser because exposure to the air would alter its pH.

The pH level in the stomach is quite different to that of the blood. The gastric juices are rich in hydrochloric acid and vary from pH 1.5 to 3.5. A hormonal feedback control system normally keeps the gastric pH within bounds, but this system can be upset by abnormal secretion of adrenaline in times of prolonged nervous tension. This is why people who live under a great deal of stress tend to have ulcers caused by gastric over-acidity.

There are also some people who have little or no free hydrochloric acid in their stomachs. This group run a very high risk of developing stomach cancers. Clearly the measurement of gastric pH levels is of considerable medical importance and over the years physicians have developed various methods of doing this. Perhaps the commonest technique nowadays is to pass an electrode through the nose and down the alimentary canal into the stomach, to give a fast and accurate indication.

Soils

Soil acidity or alkalinity is one of the major factors that affect the growth of plants. The pH of a soil is an indication of the extent to which exchange reactions in the soil are preventing nutrients from reaching the roots of plants.

Roughly what happens is this — the fine particles in a soil aggregate into bodies known as colloids, which have an electrical charge distributed over their surface. The water that permeates the soil contains dissolved ions which plants need and which they normally suck up from the solution by capillary action through their roots. However, some of these ions in solution may change places with less valuable ions on the colloid surfaces. Plants can only absorb ions from the aqueous solution surrounding the colloids; they cannot attract them from the colloid surfaces, so the soil is effectively depleted nutritionally.

Plant nutrient ions are commonly attached to the colloids in exchange for hydrogen ions, which pass into solution. Measuring the soil pH obviously gives an indication of the extent to which this has happened.

Plants vary a great deal in the range of pH they will tolerate. Most will flourish somewhere between pH 6 and 8, but some well known plants grow best outside this range. Potatoes and tomatoes, for example, like an acid soil with a pH between 5 and 6, while ca-

mellias, azaleas and other hardy flowering plants cannot tolerate any degree of acidity and do best in alkaline conditions with a pH between 8 and 9.

Acid soils can be neutralised by adding lime and over-alkaline ones will benefit from a dressing of bone meal or any other source of phosphates. If you want to measure the pH of your own soil, you should first make a ten per cent aqueous solution (i.e. 10 grams of soil in 100 millilitres of water) and measure the pH of that.

Aquariums

Fish are sensitive creatures and won't flourish unless the pH of their environment is correct. Most freshwater fish do best between pH 6.5 and pH 7.5, but goldfish (whether they are cold or warm water types) like their water a little more alkaline, i.e: pH greater than 7.5.

Acidic water in a goldfish tank encourages the growth of fungus and also induces a malady known as 'acid burn',

which makes the fish look as if they have had bites taken out of them. It is advisable to measure the pH of goldfish tanks about once a week, preferably when the water is refreshed.

If you don't have a pH meter you can get some idea of the acidity by inspecting the plants growing in the tank. If they are looking unhealthy, the water is too acid.

Swimming pools

The recommended pH for swimming pool water is between 7.2 and 7.6. In the summer months when pools are in frequent use the pH should be tested every second day and chemicals added if necessary to keep it within bounds.

Over-acid pool water encourages the growth of algae, whose colour depends on the degree of acidity. First to form are green algae, in sheltered areas around steps or ladders. Brown algae that stain the tiles are the next stage, followed by black.



Chlorinated pools should be maintained at a pH between 7.2 and 7.6. An automatic chlorinator is the best method — see the Pool Magic offer on page 35.

... and now we have

Collet Knobs*

and caps and pointers
and figure dials and nut
covers ... and they all
fit together to
form competitively
priced, vibration-proof
and very satisfying
knob
assemblies

Call us NOW!
to talk about your requirements ...
from single to O.E.M. custom made quantities.



C&K Electronics (Aust.) Pty Limited

Office 2/6 McFarlane Street Merrylands NSW 2160
PO Box 101 Merrylands 2160 Telephone 682 3144 Telex AA23404
Agents Melb. 598 2333/Adel. 269 2544/Bris. 36 1277/Perth 458 7111

Bringing you the excellence of International Professional components

* Manufactured by
SIFAM LTD England

The new AUDITEC 1045 MIC/LINE Pre-Amplifier

- 5 1/4" rack frame mounting
- Balanced input
- 600 Ohm output
- Input sensitivity from mic to line level
- Input peak level indicator
- Low distortion/low noise performance
- Designed for high quality PA and mixers
- 1045's can be mixed simply by interconnecting
- Australian designed and manufactured

AUDITEC MAJOR STOCKISTS. VIC: ZEPHYR PRODUCTS, 70 Batesford Rd, Chadstone, 3148. Ph (03) 568-2922. QLD: DELSOUND PTY. LTD., 1 Wickham Terrace, Brisbane, 4000. Phone (07) 229-6155. SA: NEIL MULLER PTY. LTD, 8 Arthur St, Unley, 5061. Ph (08) 272-8011. ACT: MUSIQUE BOUTIQUE, 29-31 Colbee Court, Phillip, 2606. Ph (062) 81-5255. NT: DARWIN COMMUNICATIONS SYSTEMS, 2420 Scriven St, Casuarina, 5792. Ph (089) 85-3184. FAMMER & DAVIES ELECTRONICS, Weber Sales Bld, Fogarty St, Alice Springs, 5750. Ph (011) 52-2967. TAS: STAGE SYSTEMS, 52 Molle St, Hobart, 7000. Ph (002) 34-4009.


OTHER AGENTS. NSW: RAY WALSH SOUND SYSTEMS, 448 Swift Street, Albury, 2640. Phone (060) 21-1502. W.M.R. ELECTRONICS, "Wirra-Willa", Belmont Road, Glenfield, 2167. Phone (02) 605-1203. DAWES SOUND SYSTEMS, 7 Mitchell's Pass, Blaxland, 2774. Phone (047) 39-4421. D.R. HI-FI & ELECTRONICS, 657 Pittwater Road, Dee Why, 2099. Phone (02) 982-7500. LANDERS MUSIC CENTRE PTY. LTD., 302 Summer Street, Orange, 2800. Phone (063) 62-6515. TRILOGY WHOLESALE ELECTRONICS, 40 Princes Highway, Fairy Meadow, 2519. Phone (042) 83-1219. R. ARCHER & SON, 107 Bungaree Road, Wentworthville, 2145. Phone (02) 631-4538. QLD: BUNDABERG HI-FI, 244 George Street, Bundaberg, 4670. Phone (071) 71-3176. KELLER ELECTRONICS, 94 Ellena Street, Maryborough, 4650. Phone (071) 21-4559.

For information on
the 1045 and other
Auditec products,
phone, write or call
at

AUDITEC

AUSTRALIA PTY. LTD.

10 Waitara Avenue, Waitara, NSW 2077 (adjacent to Pacific Highway). Phone (02) 48-4116.

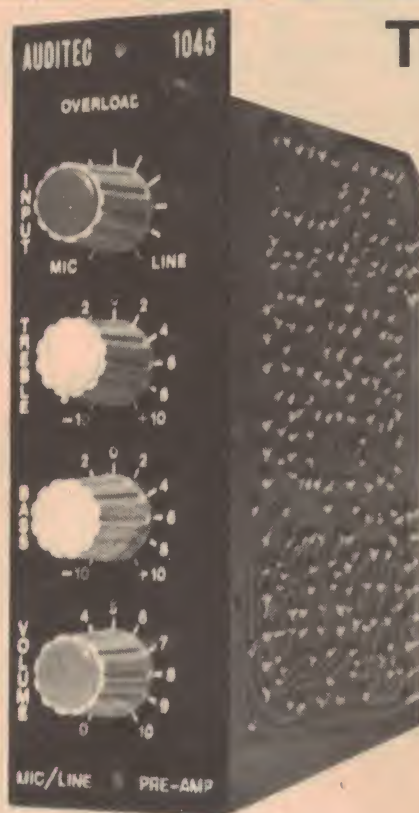

Digital pH meter is simple and accurate

A pH meter has many applications in widely varying fields of interest; in chemical analysis, in soil analysis (gardening!); swimming pool chlorination; care of tropical fish, etc. This project features a 3½-digit liquid crystal display, simple construction and straightforward operation.

**Peter Eliot
Phil Wait**

FROM TIME TO TIME readers write or 'phone us with a project suggestion that, at first sight is attractive and practical, but on further investigation runs into what seems insuperable difficulties — generally with the supply (or lack!) of a critical component.

We first looked at this project in response to a spate of reader enquires. They generally pointed out that a pH meter was something we have never done but there were plenty of commercially available models — generally at prices well beyond the hobbyist or student. The electronics for such a project could be designed in several ways and this seemed to present few problems. So, we went looking for a suitable pH electrode.

That's where it all started to come apart at the seams. Our early efforts turned up imported probes costing in the vicinity of \$100 for the least expensive model. We figured the electronics for an analogue readout instrument (using a moving coil meter) would cost around \$30 or so and for a digital readout instrument around \$40 or so. With probes at three times or more the cost of the electronics, a project started to look decidedly unattractive. It almost fell by the wayside.

However, during a conversation one day with Peter Eliot of the Amalgamated Instrument Company, who make and market a range of digital panel meters and portable digital instruments for industrial applications, the editor enquired where he obtained the pH probes for his digital pH instruments, and what did they cost? Peter was using Australian made probes chiefly because they cost less than half the equivalent imported types, and what's more they were readily avail-



able. Quick as a flash, we were talking to the man from Starcross Scientific, who distribute the range of 'Ionode' probes made in Queensland. A suitable probe was priced at around \$40 so we figured a project would be timely and popular. What's more, having already done much of the required development work, Peter Eliot volunteered to provide

us with a circuit and some material to suit our requirements. With some pc board and packaging work from the project staff, this project is the result.

Principles

An article elsewhere in this issue explains the theory behind the pH index as well as detailing applications of pH ▶

Project 572


measurement in various fields. This discussion is confined to the principles of operation behind this particular instrument.

The pH electrode or probe consists basically of an electric cell which, when immersed in a solution, will generate a voltage proportional to the hydrogen ion activity of that solution. The voltage generated is a measure of the pH of the solution. Measure the voltage generated by the electrode, display it, and you've got a pH meter. Simple enough, but there are a few difficulties.

First problem is the internal (or source) impedance of the pH probe. It is generally around 10^9 to 10^{10} ohms! This means that whatever instrument you use to measure the voltage output of the pH probe needs to have an input impedance at least an order of magnitude (i.e. 10 times) higher.

The second problem that has to be tackled has to do with the "slope" variation with temperature of the pH electrode. The output of an electrode is typically 60 mV per pH unit, i.e. for a change in pH of a solution from, say, 7.5 to 8.5, the probe's output voltage will vary 60 mV. The electrode generates a positive voltage for pH values less than pH 7 and a negative voltage for pH values greater than pH 7. The electrode output is zero at pH 7.

If you plot a graph of probe output versus pH, where pH is represented on a log scale, you get a straight line as illustrated by the unbroken line in Figure 1. However, that line is only correct for one temperature. At another temperature, a

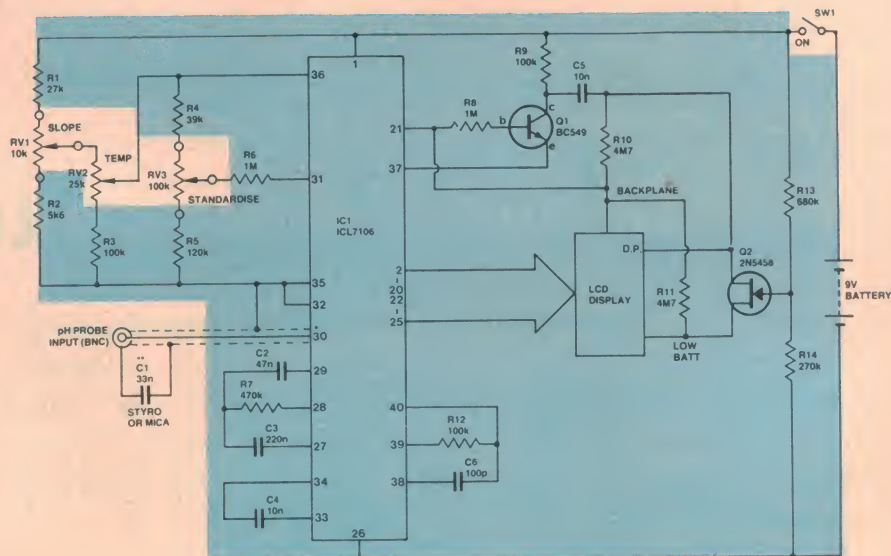

* PIN 30 DIRECTLY CONNECTED TO SCREENED CABLE
** C1 CONNECTED DIRECTLY AT BNC CONNECTOR

line having a different "slope", indicating that the probe's nominal "mV per pH unit" output has varied, results as illustrated by the broken line in Figure 1. In general, a probe's sensitivity (mV per pH unit) increases with increasing temperature and vice versa.

The slope of a probe also varies with the age of the unit. Regular calibration checks remove any error that this may bring to the reading.

There are two general ways to correct for slope variations with temperature: by means of a manual control in the circuit, or automatically. For obvious reasons, the first method is the simplest and that's what we've elected to do.

Fortuitously, the input impedance of an ICL7106 analogue-to-digital conversion IC is around 10^{11} to 10^{12} ohms which is just what we need, apart from providing an appropriately scaled digital output to drive a display. Consequently, most of the circuitry for the pH meter is contained within two ICs; the ICL7106 and an LAD204 LCD display. The external circuitry is used to provide the appropriate scaling (so that the display reads directly in pH units) as well as slope and temperature compensation controls.

As this is a battery operated instrument, we thought it would be convenient to have some indication of when the battery was getting low. Surprise, surprise — the LCD display we chose incorporates a little "low batt." warning display in the top left hand corner. This is activated with a little extra circuitry once the battery voltage falls below 8.5 volts.

The pH probe

The pH probe we obtained for our instrument comes from Starcross Scien-

HOW IT WORKS — ETI 572

The instrument employs a single-chip analogue-to-digital (A/D) converter IC, type ICL7106, driving a liquid crystal display. Virtually all of the instrument is contained within the A/D converter chip and display. Operation of the 7106 is explained in a separate box. The reference voltage for the A/D converter is varied by three controls to provide the appropriate 'scaling' of the input so that the instrument reads directly in pH units, corrected for "slope" and temperature variations.

Input to the 7106 is applied between the IN LO pin (30) and COMMON pin (32) as the input is negative-going and we require a display which reads positive. The IN HI pin (31) has a portion of the reference voltage applied to it via a resistive divider involving R4, RV3 and R5. This sets the display to read (positive) 7.00 when the input is zero i.e. when the probe is in a pH 7.00 solution.

The A/D converter reference is developed between pins 35 and 36, derived from a resistive divider pick-off between the positive supply rail and the COMMON pin (32).

Varying the reference voltage by a small amount is used to provide temperature and "slope" compensation. The SLOPE control is part of the reference voltage divider and pro-

vides a 'vernier' control over a reasonable range, so making the control easy to adjust. The TEMPERATURE control forms part of a resistive divider from the wiper of the SLOPE control, RV1. Again, this provides a vernier adjustment. The voltage appearing on the wiper of RV2 is applied to the REF HI Input of the 7106. The whole arrangement minimises interaction between the controls.

The internal clock of the 7106 is run at 50 kHz for maximum mains hum rejection, as explained elsewhere. The LCD display is driven by a square wave signal between the backplane and the numeral segments. This is provided by the 7106 from pin 21. The decimal point requires a drive signal in anti-phase to this and Q1 is arranged as an inverter to provide the appropriate drive to the decimal point.

The LOW BATT. indicator is activated by Q2. The gate of this FET is biased by a voltage divider using R13 and R14. When the battery voltage falls below about 8.5 V, Q2 turns on and applies the anti-phase backplane signal (from the decimal point drive) to the LOW BATT. pin on the display.

Hum filtering at the input is provided by a 33nF capacitor connected directly across the input socket.

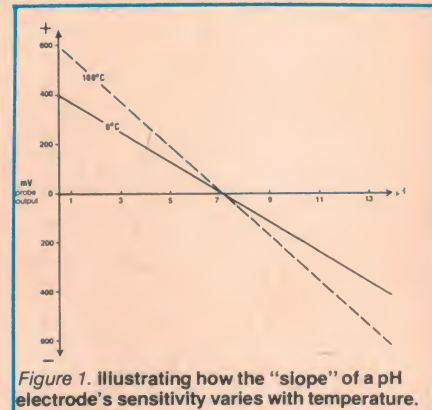


Figure 1. Illustrating how the "slope" of a pH electrode's sensitivity varies with temperature.

tific, P.O.Box 151, Frenchs Forest, NSW 2086. They are available mail order for \$45.70 which includes sales tax and delivery. The probe, designated G101NFE, comes complete with a plastic protector cap, a wetting cap for storage and a comprehensive booklet plus two 200 ml containers of buffer so-

lution, one of pH 6.88, the other pH 4.00. A BNC plug is fitted to the coaxial cable connection. The probe is a "non-flow" or sealed type and will have a long life without needing replenishment of the internal electrolyte.

In addition, Starcross have available accessories such as 100 ml plastic

beakers and plastic wash bottles. They can also supply spear point electrodes suitable for soil analysis.

Construction

The pH meter is housed in a plastic box measuring 150 x 80 x 50 mm, although a 'zippy' box of similar size having an

ABOUT THE 7106

The ICL7106 is manufactured by Intersil of the USA and contains all the circuitry for a digital panel meter employing the 'dual-slope integration' technique all housed in a 40-pin dual-in-line package. It is designed to drive any multiplexed 3½-digit liquid crystal display. A companion chip, the ICL 7107 is designed to drive any suitable 3½-digit LED display.

The internal circuitry of the 7106 can be divided into several areas: firstly there's the precision dual-slope integration type analogue-to-digital converter, then display decoder/driving circuitry and display multiplexing.

The precision dual-slope A/D converter is the most important, so let's take a close look at that.

In this method of A/D conversion the analogue input voltage is first converted to a time period which in turn is converted into a binary number by a timer/counting system. Referring to the block diagram here, and the associated timing diagram, the system commences the measurement when the switch connects the analogue signal input to the integrator which commences to 'ramp up'. At the same time the counter begins, from zero, to count the clock pulses. When a predetermined number of pulses, 1000 with the 7106, appear in the counter, the integrator is electronically switched over to the reference voltage. At this point, the integration capacitor, C, has then charged linearly from the input, rising as a ramp voltage to a level decided by the average input signal value over the counter time period (T). As the switch changes to the reference, the counter is reset to zero and commences counting again. The reference, which is of opposite polarity to the input signal, now causes the charged integration capacitor (C) to ramp downward with a fixed slope. When the output of the integrator reaches the zero threshold the counter is stopped and its contents displayed on the digital readout. The count displayed is the ratio of the counts during the 'downward' ramp (over time 't') to the counts during the upward ramp.

Thus, for a limit of 1000 counts

during the upward ramp, a direct reading of input voltage is obtained if the reference voltage is chosen appropriately.

The absolute value of the integration capacitor and the clock frequency are of little significance provided they are stable for the duration of the conversion period.

The relatively long analogue-to-digital conversion period has an inherent advantage in that it ignores noise. When noise is integrated over an extended period, its amplitude tends to zero. Thus, dual-slope integration results in excellent accuracy.

The 7106 has an on-board clock oscillator, the frequency of which is determined by external RC components — R3 and C4 in the circuit here, connected between pins 38 and 39. The clock frequency has been set to 50 kHz for the pH meter project. The oscillator frequency is divided by four internally to give a clock period of 80 µs. As the integration period is 1000 clock periods long, the analogue input is integrated over a period of 80 ms. This results in pretty nearly optimum mains hum rejection as any 50 Hz ripple on the input will be integrated over four cycles and will thus have a dc value approaching zero.


Clock input is to pin 40 (TP5 in the circuit here) and the 7106 may be driven from an external clock if so desired. It requires a square wave drive of 5 V amplitude, positive with respect to the common pin. For external clock drive the clock RC network (R3-C4) is not required.

The A/D converter reference voltage is developed between pins 35 and 36 (REF LO and REF HI respectively). Pin 35 is set internally to be always 2.8 V lower than the positive supply rail applied to pin 1. The full-scale sensitivity of the 7106 can be 'programmed' by setting the value of the voltage between the REF LO and REF HI pins. For 200 mV full-scale sensitivity (reading of 1999 on the display) the voltage between pins 35 and 36 should be set to 100 mV, for 1 V sensitivity it should be 500 mV and so on.


Input current drawn by the 7106 is extremely low, typically one picoamp (1 pA or 10^{-12} amp) as it has an input impedance measured in

Giga-ohms (10^9 ohm)! For this reason, the unit can be used to measure voltage sources having a source impedance up to 10^{11} ohms — making it ideal for application in a pH meter. A useful spin-off from the 7106's high input impedance is that

only quite small value capacitors are required in parallel with the input to provide good hum rejection. In addition, the input impedance is readily defined by using an appropriate value parallel resistor or simple attenuator on the input.

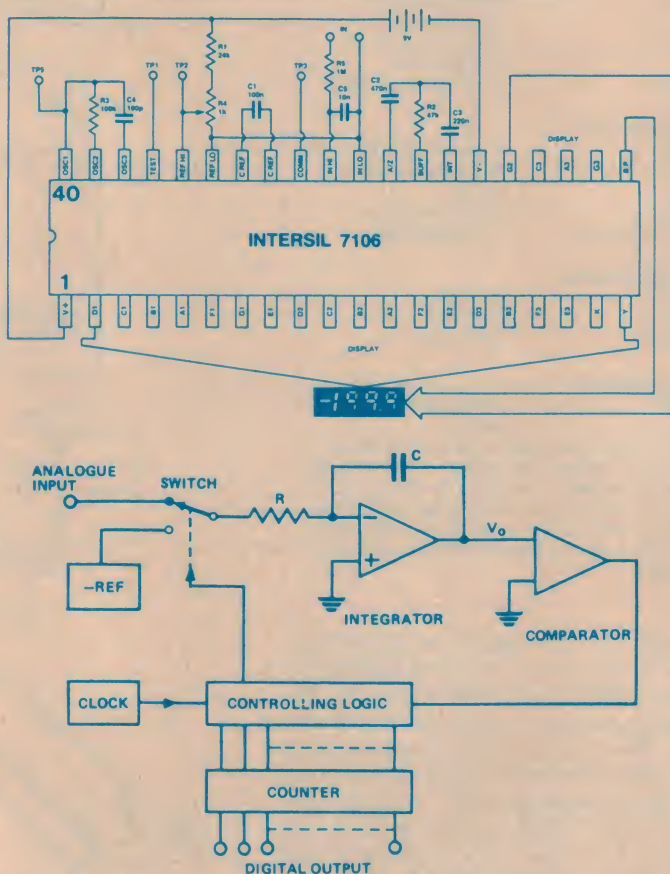

Block diagram of the 'dual-slope integration' technique of analogue-to-digital conversion commonly used in digital meters.

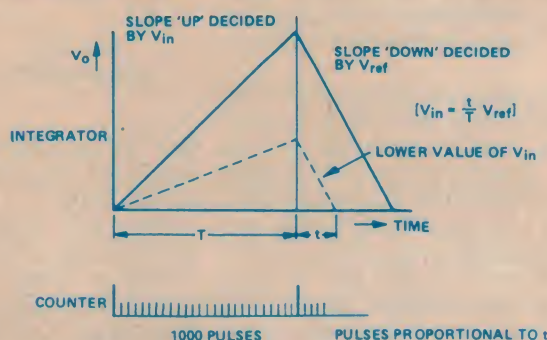

Timing diagram for the dual-slope A/D conversion technique.

Project 572

PARTS LIST — ETI 572

Resistors all 1/2W, 5%

R1	27k
R2	5k6
R3, 9, 12	100k
R4	39k
R5	120k
R6, 8	1M
R7	470k
R10, 11	4M7
R13	680k
R14	270k

Capacitors

C1	33n styroal or mica
C2	47n greencap or polycarbonate
C3	220n greencap or polycarbonate
C4, 5	10n greencap or polycarbonate
C6	100p ceramic or mica

Semiconductors

Q1	BC549, BC109 or similar
Q2	2N5485, 2N5484 or similar
IC1	ICL7106 see text
LCD Display	LAD204 see text

Potentiometers

RV1	10k linear
RV2	25k linear
RV3	50k linear


Miscellaneous

SW1	SPST miniature toggle switch
-----	------------------------------

ETI 572 pc board; plastic box 150 mm x 80 mm x 50 mm; battery clip and No. 216 nine volt battery; length of 4 mm diameter coaxial cable, RG174 or similar — not shielded audio cable; BNC socket (teflon insulated and not second hand); three collet knobs; 40 molex pins; nuts, bolts etc.

aluminium front panel would also suit. The pc board is mounted behind the front panel, positioned such that the display may be viewed through a cut-out. The three control potentiometers are also mounted on the front panel. The input connector is a BNC coaxial socket which has PTFE insulation. This was chosen as it has very high insulation resistance. We mounted the socket on one end of the case and it is connected via coaxial cable. The battery was mounted on the bottom of the case, held in place with double-sided adhesive tape.

Since the input impedance of the 7106 is extremely high, as explained previously, the input pin (pin 31) must be connected directly to the coaxial cable, without touching the fibreglass board. To do this a 1.5 mm diameter hole was drilled through the pc board immediately beneath pin 31 of the 7106, allowing the pin to pass straight through the board where the cable to the input connector can be terminated directly to it. If you look at the pc board artwork,



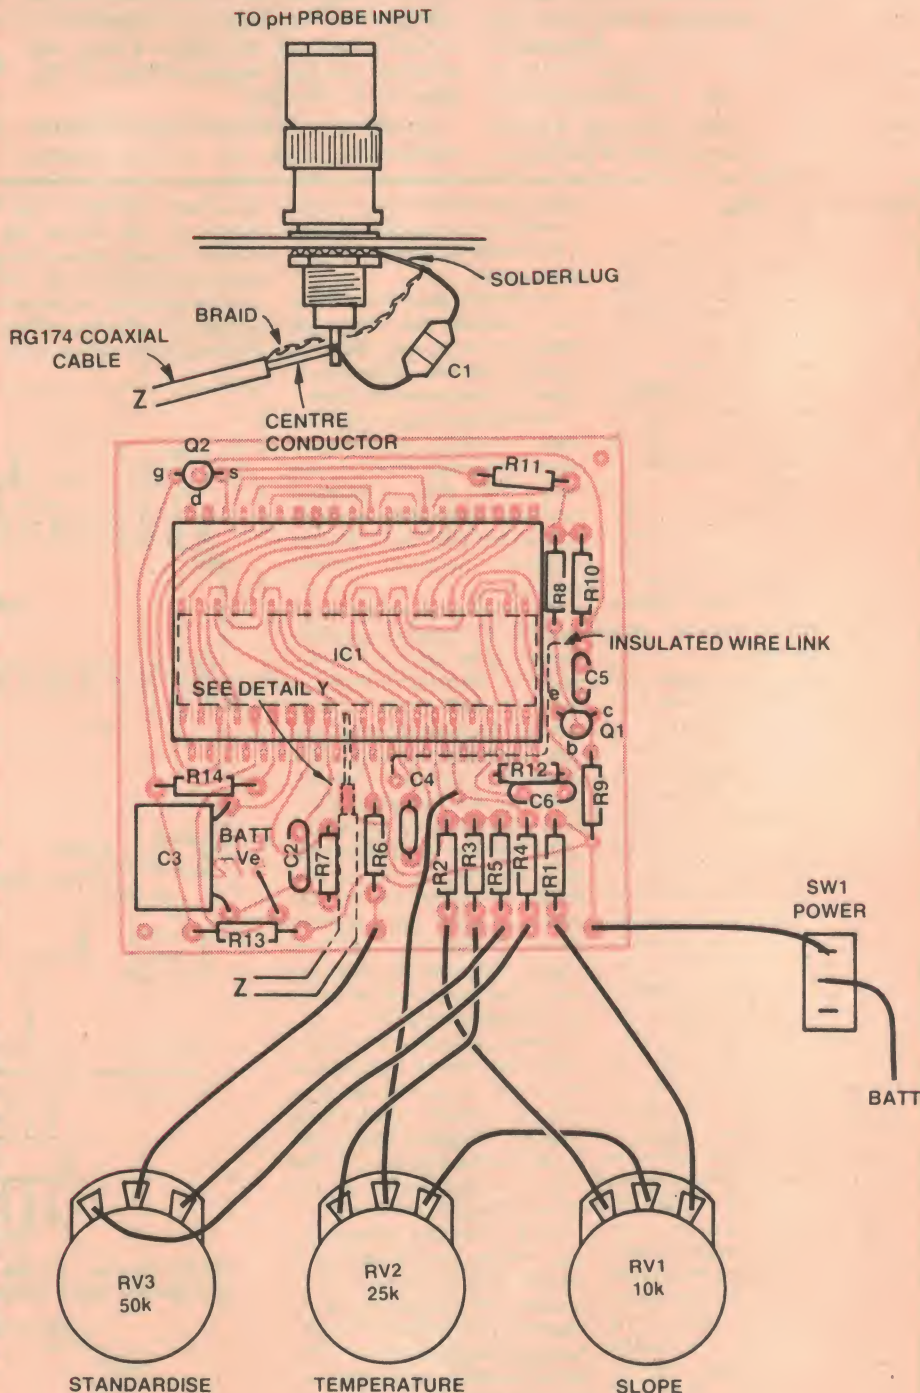


you will see this drill hole marked by a small square pad with a drill centre marked on it.

First step in the construction is to drill the lid of the case for the potentiometers, power switch and display cutout. This is best done by using the front panel artwork as a template. Scribe around the inside of the cutout, then mark a parallel line about 2 mm


inside this. Drill a series of 3 mm diameter holes using this inside line as the drill centre line, and then pop out the centre of the cutout. Use a flat file to smooth off the edges to the first scribed line.

Mark the centres of the potentiometer holes and centre punch them. These holes are drilled to 10 mm diameter. The hole for the power switch should be

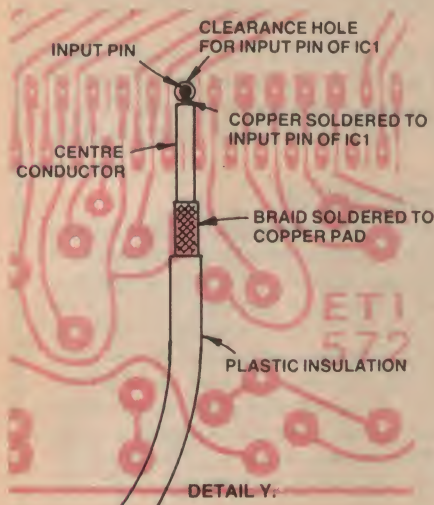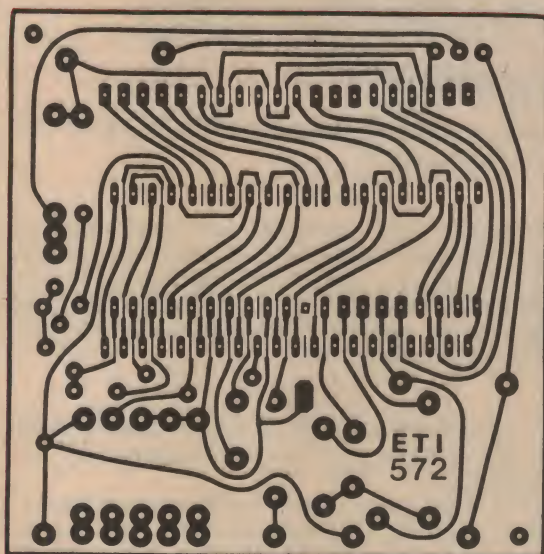

Top right: view of the printed circuit board, showing the liquid crystal display.

Right: showing the rear of the pcb, with connections to the probe and potentiometers.

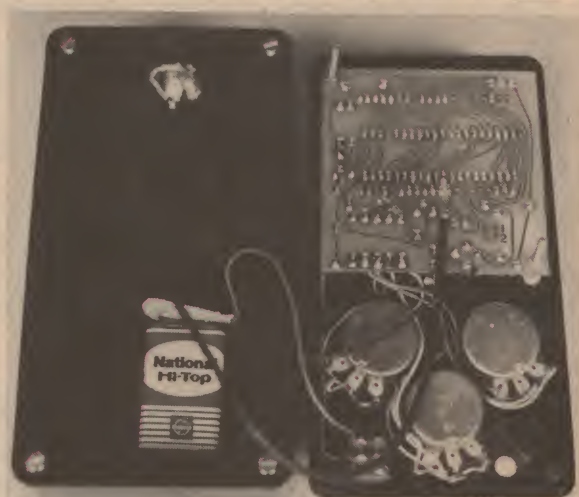

marked in the same way and drilled to 6 mm diameter. Next, mark and drill the hole for the BNC input socket (also 10 mm diameter).

The front panel transfer should not be attached yet. The pc board is mounted behind the front panel using two countersunk-head bolts and nuts either side of the board to position it. Using the unloaded pc board as a template, mark and drill the holes for the bolts that are to hold it. Countersink the holes on the upper side of the panel.

The pc board may be tackled next. All the smaller components should be mounted first. The capacitors are bent down onto the board so that they will be lower than the display. Capacitors C2, C3, C4 and C5 can be greencap, polycarbonate or mylar capacitors. If you have bought an Intersil ICL7106EV digital panel meter evaluation kit, some of the components may be used in the project. The clock capacitor, C6, can be either an NPO ceramic type or silver

mica. The evaluation kit uses a 100p silver mica type for this capacitor.

Next mount transistor Q1, and the FET Q2, pushing them hard down on the pc board so the tops of their cases will sit below the display (when it is mounted). The FET has an unusual pin-out configuration so be extra careful that you insert it the right way round.

Mount the 7106 IC as shown in the overlay diagram, being careful to orient it correctly. Forty pin ICs are very hard to get out again!

We mounted the display directly above the 7106 on two rows of Molex pins. This permits quite a compact pc board and elevates the display somewhat above the surrounding components on the board. It may also be unplugged, which might be necessary as we explain shortly.

Insert the two rows of Molex pins, but only solder those pins which are actually used. Those pins not having pc board tracks attached are not used.

When the pins are in place, bend back the steel connecting strip between the pins with a pair of long-nose pliers until the strip breaks off. The unused pins will come away with it.

Some displays do not have pin 1 designated, but if you turn the display edge-on to the light you should be able to see the numerals faintly. Alternatively, you have a 50-50 chance of getting it right (or wrong — but we're optimists!) if you take a guess.

Mount and wire the three potentiometers and the power switch next. Connections are indicated on the wiring diagram. The potentiometer terminals are positioned at odd angles so that they can be fitted in the available space. This necessitates the use of collet knobs so that the pointer can be positioned correctly in relation to the shaft. Some small grub-screw knobs will work, but you may have to shop around. Speaking of Shoparound, see page 85 this issue for details on where to buy suitable collet



S100 MICROCOMPUTING

WE TAKE S100 SERIOUSLY

Introducing a high quality, cost-effective, locally produced S100 microcomputer system. And we are proud of our achievement!

QUALITY IS BUILT IN

For a system to be of truly high quality, each element must meet exacting standards. We began our system by designing our own 12-slot motherboard, power supply, and cabinet. We then chose a series of S100 boards whose reliability and performance was well-known; added a floppy disc subsystem; and found a VDU with just the right features we wanted. The result was a complete microcomputer system with impressive specifications.

THE BASIS

As the motherboard is the link between all system components, it deserves special attention. We incorporated state-of-the-art design features like true active termination, and microstrip interconnecting lines. Crosstalk between adjacent lines and signal reflections have been largely eliminated for reliable data transfer, even at the high operating speeds of the new microprocessors.

The power supply has been designed for dependable operation and offers substantial scope for expansion. A full 20A at 8 volts and 4A for the other two supplies is sufficient for an entire complement of cards. You may not need all the capabilities now, but it's nice to know they're there when you do.

A lot of effort went into producing an aesthetically pleasing case. Constructed of aluminium and only seven inches high, the cabinet is finished in textured beige and brown with a silk-screened front panel. Its appearance makes it equally suitable for the laboratory or office environment. A cooling fan is supplied as standard.

BUT WHAT'S INSIDE?

The heart of the system is the SBC200 by S.D. Systems, a Z-80 based CPU running at 4 MHz. An RS232 I/O port allows connection to a terminal, and a parallel port to a printer. Automatic baud rate selection is provided by virtue of a counter/timer circuit, three channels of which can be used for other functions. Up to 16K of EPROM can be stored on the CPU card, making for a compact system.

The concept of efficient use of components is further demonstrated by the dynamic memory card. One ExpandRAM 2 can hold up to 64K bytes of RAM, expandable to

256K bytes using the latest chips. The bank select feature allows the use of up to eight boards simultaneously for multiuser applications.

Either single or double density recording is possible with the Versafloppy 2 disc controller. Both eight and five inch drives may be used, in combination if required. Phase locked loop data recovery circuitry ensures data integrity and high reliability.

In combination with the Versafloppy 2, our dual eight inch floppy disc subsystem can store up to two megabytes of information. Packaged in a cabinet matching our card cage, it comes complete with double sided drives, power supply, cooling fan and cable.

SO, WHAT DO YOU GET?

The combination of our cabinet, floppy disc system, visual display unit, and three S100 cards produces a complete and very powerful microcomputer system. Its areas of application are numerous, including word processing, small to medium businesses, accounting work, education, and research. And you will be pleasantly surprised at its low cost. But the good news is that any element can be obtained separately. You can start in a small way and expand when the need arises, knowing that all parts are designed to work together perfectly. Further extension will also be possible: multiuser and hard disc systems are currently being developed.

Price for a complete system with 48K memory, 2 megabytes of disc storage, and a Visual 200 VDU is \$4995 plus sales tax if applicable.

SYSTEM PRODUCTS

S100 CARD CAGE

Attractive sprayed aluminium, complete with 12 slot motherboard, cooling fan, and 20A power supply. Fully assembled & tested. **\$350**

FLOPPY DISC SUBSYSTEM

In a matching cabinet to our card cage, complete with twin double-headed Remex or YE Data drives. Fully assembled & tested with cable. **\$1850.**

SBC 200 SINGLE BOARD COMPUTER

Z-80 based 4 MHz microcomputer with 1K RAM and sockets for 8K/16K PROM, synchronous and asynchronous serial I/O port with software programmable baud rate generator, RS232 interface, parallel ports, four channel counter/timer, power-on jump, and vectored interrupt operation. Kit with monitor in 2716 PROM **\$350**

EXPANDRAM 2 DYNAMIC RAM

A single dynamic RAM card that will hold 64K. Expandable to 256K with the latest chips. Page mode operation allows the use of up to eight boards for multiuser applications. Supplied with 200 nS 2116's for 4 MHz operation. Ideal for use with the SBC 200 and Versafloppy 2. Kit 16K **\$360**, 32K **\$440**, 48K **\$520**, 64K **\$600**

VERSAFLOPPY 2 DISC CONTROLLER

State-of-the-art controller operates with all combinations of drive types in single or double density modes, and has PLL data recovery circuit. Operates with SDOS or CP/M 2.2. Kit **\$350**

PROM 100 PROM PROGRAMMER

Capable of programming all popular EPROMs such as 2708, 2758, 2716 and 2732. Zero insertion force socket is standard. Kit **\$199**

VD8 8024 VIDEO DISPLAY BOARD

On-board Z-80 and CRT 5037 controller I/O mapped, 80 x 24 lines plus programmable characters. Kit **\$370.**

Z-80 STARTER KIT

This is a unique design, especially suitable for education, control applications, experimentation, and for those who want a complete system for the lowest possible outlay. It is a complete microcomputer based on the Z-80 and contains a keyboard and seven segment display. Ideal for evaluating the Z-80 or learning about microprocessors, it provides 1K of memory on board (expandable to 2K); contains a PROM programmer that is suitable for the 2758 and 2716 EPROM's; includes a cassette interface for the storage and loading of programs; and comes with a powerful monitor (ZBUG) that provides a large number of functions. A wire wrap area allows the addition of custom circuitry, and the provision for two S100 sockets means expansion is almost limitless. Two bidirectional I/O ports and a counter/timer circuit completes the impressive list of features. Kit **\$340.**

We strive to present only top quality boards and systems at competitive prices. We can supply all requirements from single S100 boards to complete systems with software. Please write for our catalogue or for specific information on any product.

Prices are tax free; add 15 percent sales tax if applicable. For built and tested prices, add \$50 to kit prices.

Mail orders are welcome; add \$3 for postage.

MICROTRIX PO BOX 158 Hurstbridge, Vic., 3099, Ph. (03) 718-2581.

Project 572

knobs. Wire the battery clip and power switch last.

At this stage you can check to see if you have the display inserted the correct way round. Temporarily plug in a battery and turn the unit on. If all is well, you will see numbers come up on the display. If not, no numbers will appear. Unplug the display and reverse it if this is the case.

With all the components mounted, the pc board can now be mounted to the front panel. Adjust the position of the board so that the display sits firmly behind the cutout in the panel, but don't strain the board.

Finally, solder the coaxial cable from the input socket to the pc board as indicated in the accompanying diagram. Make sure that you use good quality coaxial cable such as RG174 (4 mm dia.), not ordinary 'shielded cable' as its insulation resistance is not good enough for this application. Also ensure that the PTFE insulation on the BNC socket is clean and free from flux. If necessary, wash the socket in alcohol.

Terminate one end of the cable on the socket being careful not to leave any flux on the socket's insulation, or heat the coaxial cable insulation too much. Use a good hot iron with a clean tip and solder quickly. Use a large solder lug

under the socket's nut for the braid connection or solder the braid to the edge of the nut. Capacitor C1 mounts directly across the input socket and it must be a styroseal or mica type.

Cut the cable to about 150 mm length and terminate the other end to the input pin of the 7106 as shown in the drawing on page 26. Don't let flux flow down onto the hole in the pc board or allow the solder bead at the joint to touch the board.

Now you can plug in the battery and your pH probe and give the unit a try. If all is well, the front panel artwork can be mounted. Scotchcal panels will be available from the usual suppliers (see ETI October 1980, p. 65).

Using the instrument

Before making a measurement, the instrument should always be 'buffered'. Remove the wetting cap from the probe and attach the plastic protective cap — that little bulb on the end is *very* fragile. Set the TEMPERATURE control to room temperature (say, 25) — the scale on this control is marked in degrees centigrade (°C). Clean the electrode with distilled water if you have used it recently.

You will need two buffer solutions,

one having a pH near 7 and the other a pH near 4. The two most commonly available have a pH of 6.88 and 4.00. Put the probe in the pH 7 solution and adjust the STANDARDISE control for the correct reading according to the marked pH of the buffer. Allow about two minutes or so for the reading to stabilise before finally adjusting the control. Remove the probe and wash it again in distilled water.

Now put the probe in the pH 4 buffer and allow the reading to stabilise. Then adjust the SLOPE control for the correct reading according to the marked pH of the buffer.

Go through the procedure again to ensure correct adjustment. Only then can you take a reading in the solution or solutions to be tested. Wash the probe before making a measurement and between successive measurements.

If the temperature of the solution, or solutions, to be measured differs substantially from the temperature of the buffers, set the TEMPERATURE control to approximately the temperature of the solution to be measured. This control only has a minor effect and its operation is very 'broad'.

There you have it, your own digital pH meter with an Australian-made probe to boot!

THE CARE & FEEDING OF YOUR pH ELECTRODE

To ensure the maximum life and best response from your pH electrode, the following procedures are recommended.



Store the pH electrode with its tip soaking in distilled water, use the protective shield and rinse with distilled water between measurements.



NEVER clean a pH electrode on a rag, or on your sleeve, or under a running tap.

1) When not in use the pH electrode should be stored with its tip soaking in distilled water. It is important that the porous glass membrane and salt bridge are *not* allowed to dry out. If for some foolish reason this does occur the electrode will require soaking in distilled water for 24 hours before it can next be used.

2) For long term storage, cover the glass bulb with a 'wetting cap' containing distilled water. (Note that plastic wetting caps are supplied with the Australian-made Ionode pH electrodes).

3) When in use, the electrode should be rinsed thoroughly with distilled water (preferably applied with a fine-nozzled wash bottle — see the accompanying illustration) between successive readings and between buffer calibrations.

4) If the electrode is used with non-clean or organic solutions the electrode may require extra cleaning from time to time. The most common method used is to soak the electrode for 24 hours in a '0.1 normal' hydrochloric acid solution. Alternatively, simply soaking the electrode in a mild solution of household detergent and distilled water will generally emulsify the contaminants and restore the electrode to normal.

5) Always be careful not to touch, scratch or damage the porous glass membrane. It is advisable to use a plastic protector cap as shown in the accompanying illustration. (These are supplied with the Ionode electrode).

6) Generally, a sluggish response from the electrode will indicate that it needs cleaning.

For troubleshooting other problems it is best to consult the instruction booklet supplied with the electrode or the supplier from whom you purchased the electrode.

Australia's first under \$300 COMPUTER...

\$295

INCL. ZX80 BASIC
MANUAL

Remember — all prices shown include sales tax, postage and packing.

N.B. Your Sinclair ZX80 may qualify as a business expense.

Sinclair ZX80

-British made.



Until now, building your own computer could cost you around \$600 — and still leave you with only a bare board for your trouble. The Sinclair ZX80 changes all that. For just \$295 you get **everything** you need including leads for direct connection to your own cassette recorder and television. The ZX80 really is a complete, powerful full-facility computer matching or surpassing other personal computers costing much more. The ZX80 is programmed in BASIC and you could use it for anything from chess to running a power station.

Two unique and valuable components of the Sinclair ZX80: the Sinclair BASIC interpreter and the Sinclair teach-yourself BASIC manual. The unique Sinclair BASIC interpreter: offers remarkable programming advantages — unique 'one touch' key word entry. The ZX80 eliminates a great deal of tiresome typing. Key words (RUN, PRINT, LIST etc) have their own


single key entry. Unique syntax check. Only lines with correct syntax are accepted into programs. A cursor identifies errors immediately, preventing entry of long and complicated programs with faults only to discover them when you run.

Excellent string handling capability — takes up to 26 string variables of any length. All strings can undergo all rational tests (e.g. comparison). The ZX80 also has string input to request a line of text; strings do **not** need to be dimensioned. Up to 26 single dimension arrays. FOR/NEXT loops nested up to 26. **Variable names** of any length. BASIC language also handles full Boolean arithmetic, conditional expressions, etc.

Exceptionally powerful edit facilities, allows modification of existing program lines. **Randomise function**, useful for games and secret codes. **Timer** under program control. PEEK and

POKE enable entry of machine code instructions, USR causes jump to a user's machine language sub-routine. **High resolution graphics** with 22 standard graphic symbols. The Sinclair teach-yourself-BASIC manual 96 page book free with every kit.

Fewer chips, compact design, volume production means **MORE POWER FOR YOUR DOLLAR!** The ZX80 owes its low price to its remarkable design: the whole system is packed onto fewer, newer more powerful and advanced LSI chips. A single SUPER ROM, for instance, contains the BASIC interpreter, the character set, operating system and monitor. And the ZX80's 1K byte RAM is roughly equivalent to 4K bytes in a conventional computer because the ZX80's brilliant design packs the RAM so much more tightly. (Key words occupy just a single byte). You can add to the memory via the expansion port, giving a maximum potential of 16K.

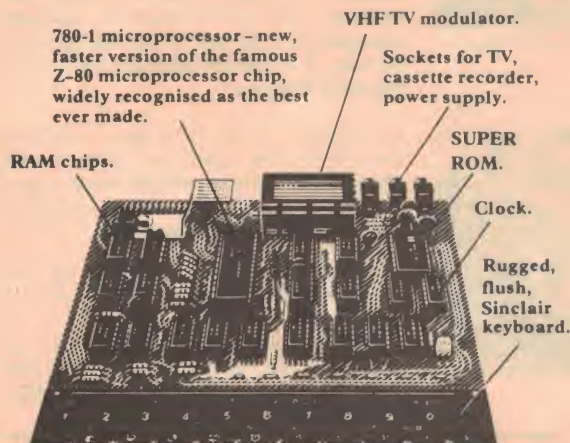

ORDER FORM:

SINCLAIR EQUIPMENT (AUSTRALASIA) PTY. LTD.
308 High St., Kew 3101, Vic. Tel. 861 6224.

Quantity	Item	Item Price	Total
	Ready-assembled Sinclair ZX80 Personal Computer(s). Price incl. ZX80 BASIC manual, excl. mains adaptor.	\$295.00	
	Mains Adaptor(s) (600Ma at 9V DC nominal unregulated).	\$ 9.50	
	Memory Expansion Board(s) takes up to 3K bytes.	\$ 28.50	
	RAM Memory chips — standard 1K bytes capacity.	\$ 10.00	
	Sinclair ZX80 Manual(s) free with every ZX80 computer.	\$ 15.00	
I enclose cheque/Bankcard/ Diners Club/Amex		TOTAL	

☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Name _____ ET 1


Address _____ Postcode _____

ZX80

8K

BASIC ROM

Fantastic new options for **Sinclair ZX80**

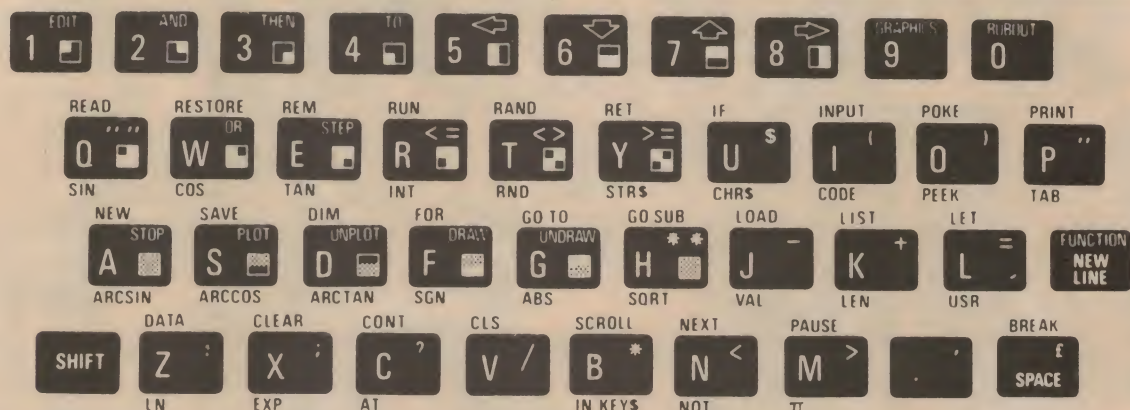

THE CHIP a drop-in replacement for the existing 4K BASIC ROM, comes with a new keyboard template and a supplementary operating manual. Designed for high-level, full facility computing.

KEY FEATURES INCLUDE —

- Full floating-point arithmetic to 9-digit accuracy.
- Logs, trig, and their inverse functions, graph plotting facility.
- Animated displays using PAUSE n.
- Full set of string-handling facilities.
- n dimensional arrays, cassette LOAD and save with named programmes.

AND ZX80 16K-BYTE RAM PACK

Complete module designed to provide massive add-on memory capacity.

The 16K-BYTE RAM pack can be used for program storage or as a database. Yet it costs up to half the price of competitive additional memory.

Measuring 3 in x 3 in x 1.25 in approx., the RAM pack plugs into the existing expansion port on the rear of the Sinclair ZX80 via an edge connector. No additional power supply is needed.

SINCLAIR EQUIPMENT (AUSTRALASIA) PTY. LTD.


308-312 High Street, Kew, Vic., 3101. Tel. 861 6224.

SE3

SERIES 3000 COMPACT STEREO AMPLIFIER

reprint of pc board overlay

Owing to a printer's error, this overlay was not reproduced correctly in last month's issue. In addition, some artwork came off the overlay and this has been corrected here.

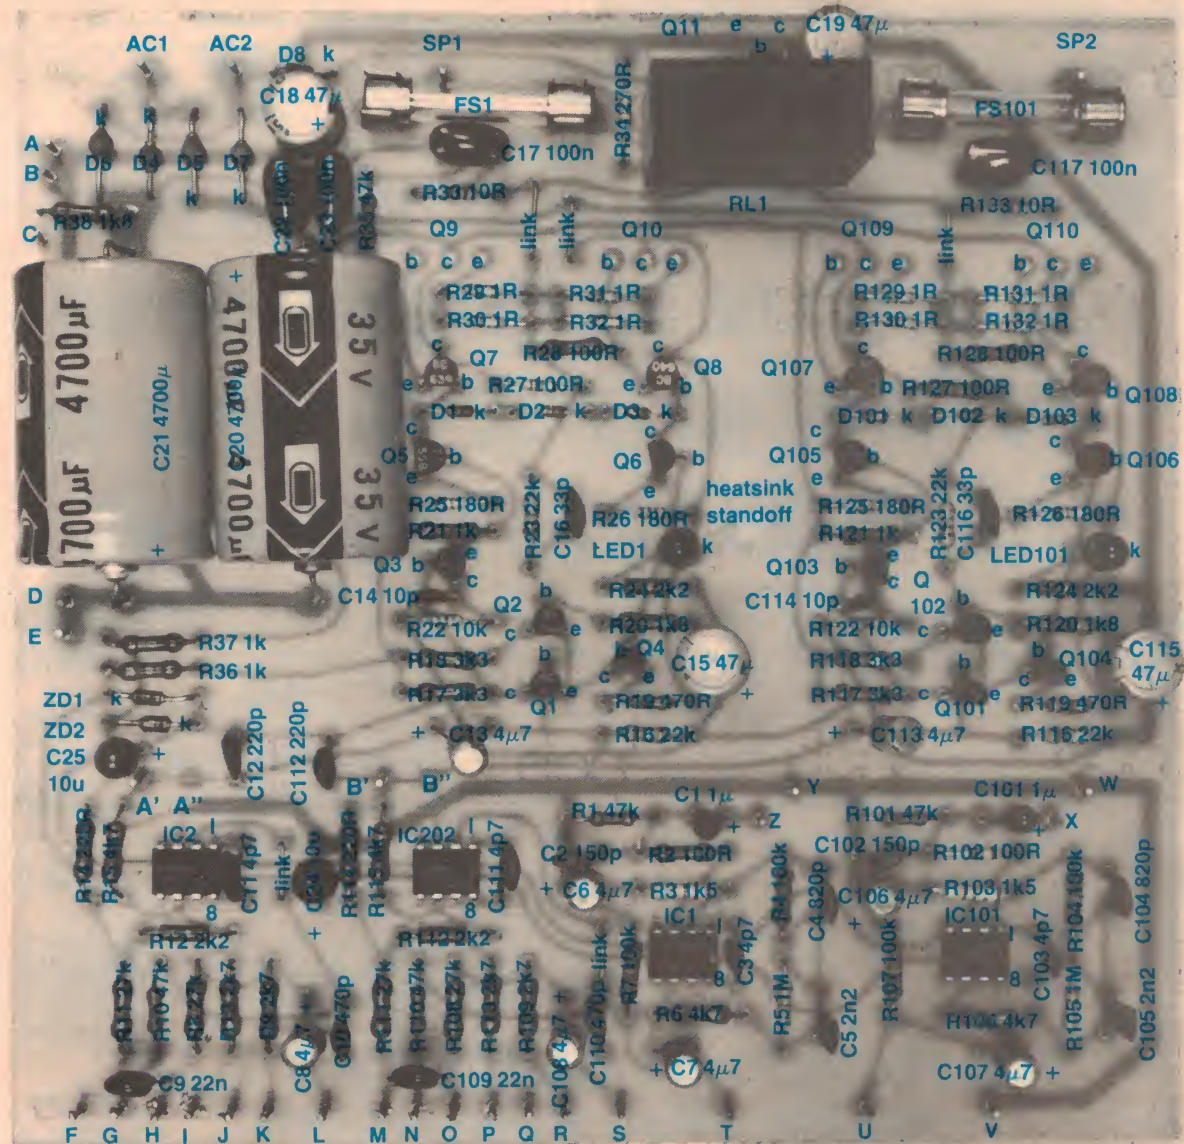

JOHN F. ROSE COMPUTER SERVICES PTY. LTD.

33-35 ATCHISON STREET, ST. LEONARDS, N.S.W. 2065 AUSTRALIA

The NDK S-4000 Wordprocessing Printer

For all bulk wordprocessing applications where reliability, speed and sustained print quality are of prime importance.

Introduction

The NDK S-4000 is supplied with a heavy duty 16 wire head producing single pass high quality 17 x 16 matrix characters at 75 characters/second for wordprocessing quality and 150 - 200 characters/second for drafts.

Four fonts (dot matrix, wordprocessing, super/subscript and Katakana) are supplied as standard. Typical scientific, mathematical and currency symbols are included as standard. The fonts can be intermixed as bold faced, enlarged (5 CPI, 17 x 23 matrix), reduced (12 CPI) or normal (10 CPI). Other fonts can be specified by the user. Each dot on the 16 x 16 matrix can be programmed by the host computer to produce special graphic effects (such as Letterheads and trade marks). Full page graphics is possible by controlling ten wires of the printer and executing half-line feeds. John F Rose Computer Services Pty Ltd will be supplying software to enable the user to specify and print special characters for any row/column position. The special patterns can be printed at the rate of 900 dot columns/second at a resolution of 4.7 dots/mm (120 dots per inch) both horizontally and vertically. A horizontal dot resolution of 240 dots per inch can be produced using half dot timing.

Superscripts and subscripts are produced by the superposition method enabling complicated mathematical formulae to be produced quickly and easily. The subscripts and superscripts are half normal size and the printing pitch is half that of the PICA (see Specification.).

Dot (or Graphics) Mode

The Dot (or Graphics) mode can be entered by software instruction or by pulling the MODE signal pin of the interface low.

Dot Mode by MODE signal

The MODE signal should only be changed between the ACK and DSTB signals. MODE signal changes are limited to 40 times per line. When the MODE is pulled low, the first data byte sent after the change controls print needles 1 to 8 and the second byte controls pins 9 to 16. The third byte controls pins 1 to 8 of the next dot column to be printed and so on. The character mode is re-entered when the MODE signal is pulled high.

Expanded graphics patterns can be printed vertically in the pitch of 1/12" by using 10 needles and Half line Feeds.

The printer has a built-in test mode and the following STATUS signals are displayed on the control console:

- 0 Out of paper
- 1 Over-run.
- 2 VFU Over-run (no punched hole found)
- 3 Sensor Alarm — failure or timing sensor or carriages locked
- 4 Head drive Protect — failure of drive circuit of printhead
- 5 Motor drive protect
- 6 Failure of 30 volt DC supply
- 7 RAM error
- 8 ROM error
- 9 Input error (more than 20 software mode changes/line)
- A Firmware failure
- B 5v supply failure

SPECIFICATIONS

Printing method:	Dot Matrix impact			
Printing direction:	Serial printing by 16 wire head Bi-directional printing with logic seeking and 762 mm/second (max.) space skipping function.			
Printing Characteristics				
Character Mode (Normal/Enlarged)	Regular Mode		Draft Mode	
Printing Speed (char/sec)	Pica	Elite	Pica	Elite
Pitch (CPI)	75/37.5	90/45	150/75	180/90
Line length (char/line)	10/5	12/6	10/5	12/6
Character Mode (Normal/Enlarged)	136/68	163/81	136/68	163/81
Printing Speed (char/sec)	Sub/Superscript			
Pitch (CPI)	Pica	Elite		
Line length (char/line)	150/75	180/90		
Dot Density:	20/10			
Character set:	272/136	326/163		
Line Feed:	4.7 dots per mm. 160 codes (JIS c6220, 8 bit) plus special characters. 2 modes (regular and draft) 6 lines per inch or 12 lines per inch 45 lines/second (slew rate 6 lines per inch) 40 ms max. (single feed) Optical 2 channel (8 bit punched tape)			
V.F.U.:	Underwood spool, nylon fabric ribbon			
Ink Ribbon:	13mm x 27m or 13mm x 11m			
Paper:	4" to 15" inches width continuous paper with sprocket holes for tractor feed.			
Copy:	1 original and 5 copies with 34Kg no carbon paper.			
Buffer:	2 separate line buffers.			
Interface:	8 bit parallel TTL level (Centronics) RS232c Serial interface			
MTBF:	2000 hours			
Life:	7 years (Head life: 100 million characters in regular mode).			

The following come as standard and are included in the price shown.

- A. Stand
- B. Parallel or RS232c Serial
- C. Front or rear paper feed
- D. Adjustable tractors
- E. 2 x Form Control Loops & 2 Ribbons.
- F. Sound proofed contoured casing
- G. Ease of maintenance (only 3 major sub-assemblies)
- H. 6 months' warranty

\$3,190.00 plus \$390.00 sales tax.

The above price is firm for all orders taken before 31/1/81.

NDK S-4000

MATHEMATICS SAMPLE USING STANDARD CHARACTERS

$$F(\omega) = aT \frac{\sin \omega T/2}{\omega T/2} e^{-j\omega T/2}$$

$$e_{rms} = \sqrt{4KTR(f_2 - f_1)}$$

$$L_1 = 10 \log \frac{1}{80} \times S_n \text{ (dB)}$$

$$L = \int_0^x \sqrt{\left(\frac{dx_1}{d\theta}\right)^2 + \left(\frac{dy_1}{d\theta}\right)^2} d\theta$$

$$x = \begin{vmatrix} c_1 & b_1 \\ c_2 & b_2 \end{vmatrix} \div \begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix} = \frac{c_1 b_2 - c_2 b_1}{a_1 b_2 - a_2 b_1}$$

SEND \$1.00 FOR YOUR COMPREHENSIVE CATALOGUE

TELEPHONE (02) 439 1220 TELEX AA 27901

LIGHTING FOR ENTERTAINMENT

**FOR
THE
PROFESSIONALS**



SPECTRUM'S PAR 64 UNIT

This New, Versatile fitting is Top of the Range when it comes to a really professional Lighting Effect.

It's compact, extremely light weight, and modular appearance certainly alleviates the hard work previously experienced when setting up shows with heavy, hard to handle fittings, and can be managed easily without any specialised training.

This unit has been designed to accept PAR 64 lamps which can be alternated to produce a very narrow

spot of light through to a full flood effect.

These lamps are also complemented by the intense colour range available from Rosco.

To implement a variety of colour, quickly and efficiently, easy colour change is imperative. This unit does not require exact colour size as it has no separate old fashioned frame. Its compact design incorporates a built in filter frame which folds away any excess material.

SPECTRUM LIGHTING COMPANY

18 THOMAS STREET, CAVAN, SA, 5094

PHONE (08) 260-2500, A.H. (08) 263-8665

THE PROFESSIONAL LIGHTING EQUIPMENT

Special
reader offer



The POOL MAGIC chlorination controller

For many years municipal swimming pools have used liquid chlorine (sodium hypochlorite) for sanitizing swimming pool water. Liquid chlorine offers many advantages over dry chlorine (calcium hypochlorite) when used in swimming pools. Liquid chlorine is completely soluble and fast-acting. It leaves no residue, eliminating the problem of 'calcium scale' experienced by most pool owners using dry chlorine.

Commercial installations have shown that dosing with chlorine once per day is a very inefficient and uneconomic way of chlorinating a pool. The pool will have a very high chlorine level following dosing. The chlorine level is depleted during the day until virtually no free chlorine exists in the pool when the next day's dose is due.

A much better system is to dose the pool only when it needs chlorine — when the free chlorine level falls below the ideal level. The pool is then maintained at the proper chlorine level all the time. Commercial and municipal pools employ this system.

Such a system has now been developed for household and commercial installations. POOL MAGIC provides an efficient and reliable way to dispense liquid chlorine. It employs a sensing device and an electronically-controlled valve to dispense chlorine when the chlorine level falls below that required. The POOL MAGIC system eliminates the need for daily dosing and chlorine testing.


POOL MAGIC employs a probe that measures the oxidation-reduction potential of the pool water. This potential is a measure of the ability of the water to kill bacteria and algae and is proportional to the free chlorine level of the pool. There are three components in the system: a sensing probe which is attached to the return-to-pool line, a solid-state controller and a solenoid injector valve. The latter is mounted on the pool suction line.

You can easily install the POOL MAGIC system yourself or, alternatively, installation can be arranged through chlorine distributors located in major cities and towns.

POOL MAGIC has no external controls. The chlorine level is factory preset. All the customer has to do is turn on the power. POOL MAGIC will operate when the filter and pump are operating. POOL MAGIC is fully Australian made and comes complete with a 12 month warranty. The manufacturers of the POOL MAGIC have agreed to offer these units to ETI readers at a special price for a limited period. The POOL MAGIC equipment normally retails for around \$320 (not including chemicals or installation charges). The POOL MAGIC is offered to ETI readers for:

\$250

(not including chemicals or installation charges) plus \$5.00 packing and delivery charges.

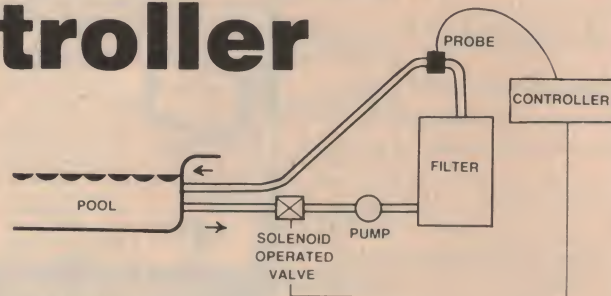

CHEMICALS: For your convenience you can have liquid chlorine home delivered and the supplies will include information on where to get chemicals in your area if you tick the appropriate box in the coupon.

INSTALLATION: The POOL MAGIC is supplied complete with installation instructions and any reasonably handy person can install it for themselves. If you don't wish to install it yourself Starcross will include information on where to contact an installation firm in your area if you tick the appropriate box in the coupon. A nominal charge is made for installation.

If you would like more information about the POOL MAGIC equipment, you can 'phone or write Eddy Joseph at Starcross Pty Ltd, P.O. Box 151, Frenchs Forest, NSW 2086. Phone (02) 451-1346. The special price is only available if you order using the coupon on this page.

NOTE: This offer is made by Starcross Pty Ltd and ETI is acting as a clearing house only. Cheques or money orders should be made payable to POOL MAGIC OFFER and sent, together with this coupon (or a photostat of it) to "Pool Magic Offer", ETI Magazine, 15 Boundary St, Rushcutters Bay NSW 2011. We will process our order and pass it on to Starcross Pty Ltd who will send you the goods. Please allow up to four weeks for delivery.

NOTE: Offer closes 31 January 1981

Enclose cheque or money order to total value and mail this coupon to:

POOL MAGIC OFFER

ETI Magazine, 15 Boundary St, Rushcutters Bay NSW 2011

Please send me the POOL MAGIC swimming pool chlorination controller priced at \$250 (does not include chemicals or installation charges) \$250.00

Packing and delivery \$5.00

Please include nearest contact for chemicals ☐

Please include nearest contact for installation ☐

TOTAL \$

Cheque or money order number

Signature

(Please print name and address clearly)

Name

Address

.....

..... Postcode

PARTS FOR NEW KITS

If a kit you want to build is not listed, the parts may be available anyway. Check the Dick Smith Catalogue or call in to your nearest Dick Smith store.

NEW EA MOSFET STEREO AMPLIFIER (See EA December)
Full details for this superb kit are being finalised at the moment. Look for our special adverts in next month's magazines.

SELECTALOT (See EA December)

PCB Cat H-8384 \$3.00
All other components are normal stock lines.

AC MILLIVOLTMETER (See EA December)

PCB Cat H-8385 \$2.25
All other components are normal stock lines.

NEW ETI 5000STEREO AMPLIFIER (See ETI December)

PCB Cat H-8387 \$9.95
(Fibreless board)

SYSTEM 80/TRS-80 INTERFACE (See EA November)

PCB Cat H-8383 \$1.90
All other components are stock lines.

ELECTRONIC MUSIC GENERATOR (See EA December)

Complete kit, including instructions Cat K-3512 \$12.50

PCB only Cat H-8382 \$1.90

TRAIN CONTROLLER (See EA November)

PCB Cat H-8381 \$1.90
All other components for this kit (including case) are normal stock lines.

'3000' STEREO AMPLIFIER (See ETI November)

PCB Cat H-8631 \$7.50
All other components for this project are normal stock lines.

MOISTURE INDICATOR (See ETI November)

PCB Cat H-8632 \$1.90
All other components for this project are normal stock lines.

ACOUSTIC COUPLER (See EA September)

Complete kit, including metalwork, etc. Cat K-3605 \$75.00

Printed Circuit Board only Cat H-8380 \$5.95

EXPANDED SCALE AUTOMOTIVE VOLT/METER (See ETI Sept.)

Printed Circuit Board Cat H-8630 \$1.50

LM3914 IC Cat Z-6295 \$4.25

Choose round or rectangular, large or small LEDs to suit your particular application.

CHASER (See EA August)

Complete kit, including front panel Cat K-3145 \$69.50

PCB only Cat H-8379 \$5.95

NASA POWER CHOPPER (See EA August)

Short form kit (All components & PCB) Cat K-3325 \$16.50

PCB only Cat H-8378 \$3.00

LEDS AND LADDERS GAME (See EA August)

Complete kit inc. printed panel Cat K-3390 \$15.75

PCB only Cat H-8378 \$3.00

LED TACHO (see ETI August)

Short Form Kit (includes PCB components etc, but no case - build it into your dash board) Cat K-3240 \$24.50

FAST NICAD CHARGER (See ETI August)

PCB only Cat H-8627 \$3.00

(All other components in this kit are normal stock lines)

GUITAR/PA PREAMP (See ETI August)

Short form kit PCB & components, no transformer or case) Cat K-3035 \$29.50

300 WATT AMPLIFIER (See EA June)

Printed Circuit Board only Cat H-8376 \$9.95

(Most other components are normal stock lines)

TV CRO ADAPTOR (See EA May)

Complete Kit Cat K-3060 \$29.95

Printed Circuit board Cat H-8375 \$3.75

EA's NEW MUSIC GENERATOR

This is a great little kit for the beginner or the experimenter - it uses a very special IC which is pre-programmed with two popular tunes. It plays a complete melody.

including chords (not just a few bars as other IC's) it is intended for novelty or alarm applications with a suitable amplifier it could be used as a singing doorbell.

ONLY \$12.50

Cat K-3512

OPENING SOON AT SPRINGVALE (VIC)

Yes, another Dick Smith branch will be opening early in the new year at Springvale - to serve Melbourne's Eastern Suburbs. Watch your local papers for the opening date!

CNR DANDENONG ROAD & SPRINGVALE ROAD, SPRINGVALE.



DON'T FORGET: ONLY 3 WEEKS TO CHRISTMAS!!!

Need a few ideas for someone into electronics? Go no further than your nearest Dick Smith store!



ONLY \$85.00

Cat. X-9000

CAUTION!

BWARE OF INFERIOR UNITS WHICH MAY PRODUCE DANGEROUS OZONE.

CLEAN, HEALTHY AIR: ELECTRONICALLY!

You must have read press reports about the advantages of negative ions: how they help clean stale air, remove cigarette smoke and dust particles, etc. etc. They're very popular - and huge numbers of customers have been asking for them. We were worried by some reports that they also put out significant levels of dangerous ozone - now we've found an Australian made ion generator that does not emit Ozone. A written test from a leading University proves that it is completely safe. So now you can have all the advantages of negative ions - and not worry about Ozone.

A GIFT IDEA FOR DAD?



\$4.50

How many times has Dad come home late, because he'd left his lights on and the battery went flat? Here's a gift he'll really appreciate, and it won't break your piggy bank! This light reminder connects easily to his car's electrical system (instructions supplied) and warns him if he leaves the lights on! Have a happy Dad, have a happy Christmas when you give him a Light Reminder! Cat A-8509

REMEMBER LAST YEAR...

We had a very special special each month... an item which was actually BELOW COST? We didn't tell you what it was - you had to find out for yourself (we told you the month after!)

We stopped doing this, but it seems we made a very wrong move. So many people have asked for our below cost special each month that every one of our store managers has demanded they be re-instated. As we don't want to lose our store managers en masse (or our customers!) we're going to start our special again next month. So from January, call into your nearest Dick Smith store and check out our below cost special.

Don't try to remember it - TAPE IT!

When it's important, don't rely on your memory. Tape those important conferences, sales meetings, interviews, etc. for later reference. This budget-priced recorder takes standard cassettes, and operates from its own batteries or external plug-pack adaptor. It features a review button for instant checking of recording. Also has fast forward and pause controls, too. Comes with built-in electret microphone, case & earphone.




\$45.00

Cat A-4050

OR A MICRO CASSETTE

Here's another superb recorder: a palm-sized unit you can fit anywhere. And it has a 2 speed motor for extra recording time (standard 15 min/side micro cassettes give either 15 or 30 minutes/side). Tiny size doesn't mean tiny quality: use it anywhere (internal batteries or external supply). Compare our price: single speed equivalents sell for \$79 and more elsewhere! Cat A-4040



Cassettes to suit: Tiny micro cassettes to suit this recorder (up to 30 mins/side). Cat C-3360 \$2.95

\$47.50

\$139 DIGITAL DISPLAY BONUS WITH EVERY YAESU FT-101Z!!

ADD-ON DIGITAL DISPLAY KIT IS ALSO AVAILABLE FOR EXISTING FT-101Z CONVERSIONS: Cat D-2861



\$139.00

YES! With every FT-101Z, we're including a digital frequency display kit, normally worth \$139.00, at no extra charge! It's a simple 'drop-in' replacement display, any ham can install it in an hour or so. Full installation instructions are included. You know how good the FT-101Z is: now it's even better: it becomes an FT-101ZD for the same price! Offer is open strictly while current stocks last: be quick for this bargain.

ONLY WHILE STOCKS LAST!

FT-101Z (Cat D-2862): \$775.00
Digital Disp. (D-2861): \$139.00

YOU PAY: \$775.00

DON'T GET CAUGHT! (at about 6AM on Thursday, 25 December - as the kids unwrap their Christmas presents...)

Imagine! All those battery operated toys and no batteries to run them. Wouldn't you be popular!

Stock up now with budget Hi-watt batteries from Dick Smith. Far cheaper than most brands, yet they're fresh and ready to go to work immediately. All popular sizes:

UM-1 ('D') size	Cat S-3001	30c ea
UM-2 ('C') size	Cat S-3002	25c ea
UM-3 ('AA') size	Cat S-3003	22c ea
UM-10 ('AAA') size	Cat S-3004	25c ea
216 size (9V)	Cat S-3006	45c ea

ALKALINE BATTERY PACKS

If you prefer, we have famous brand Alkaline extra-long-life (or extra-heavy-duty!) batteries available (Two per pack except 9V type).

AA size	Cat S-3280	\$1.39 pack 2
C size	Cat S-3282	\$1.69 pack 2
D size	Cat S-3284	\$1.69 pack 2
9V size	Cat S-3286	\$2.25 each

GREAT FOR CHRISTMAS CAMPING!

Who'd be without a torch? But why limit yourself to a plain, ordinary torch? This is a beauty it's got:

- A powerful outdoor spotlight
- A bright, but soft fluorescent light
- An emergency orange flasher


\$14.95

(Requires 6 'D' cells: Cat S-3001 @ 30c each - not supplied)



SPACE INVADERS™!!

Hand-held version of the popular game. Works just like the big ones, but doesn't cost a fortune to use! Amazing micro-computer technology makes hand-held space invaders a reality! Cat X-1150



A more elaborate version - and this one also has a second game: Blockbuster! Easy to play, great sound effects, with various options to make the game even more exciting. Battery operated, so they can take it anywhere. Cat X-1152


SCREWDRIVER BARGAINS!

What a bargain! 10 pieces for less than \$4! Flat blade, Phillips, range of lengths all for only **\$3.90** Cat T-4000



LOOKING FOR SOMETHING A LITTLE DIFFERENT THIS YEAR...

Something that will challenge them to use their brains? Try this 'CODEMASTER'! It's a game of intelligence. Using logic and deduction, you have to solve the hidden puzzle. It's different - and it's challenging. Cat X-1140



\$29.50

MAJOR DICK SMITH RE-SELLERS:

ATHERTON, QLD: Tableland Radio Service
2 Jack Street, Phone 912 017
BENDIGO, VIC: Sumner Electronics
95 Mitchell Street, Phone 431 977
BLACKHEATH, NSW: Goodwin Electronics
123 Station Street, Phone 878 379
BROCK HILL, NSW: Crystal TV Rentals
88 Crystal Street, Phone 8857
CAIRNS, QLD: Thompson Instrument Services
79-81 McLeod Street, Phone 512 404
COFFS HARBOUR, NSW: Coffs Harbour Electronics
3 Coffs Harbour Place, Park Ave, Phone 525 884
DARWIN, NT: Kent Electronics
42 Stuart Highway, Phone 814 749
DOBBIN, NSW: Selekt Sound
31 Talbragar Street, 626 979
EAST MAITLAND, NSW: East Maitland Electronics
Cnr Law & High Streets, 337 327
FAIRY MEADOW, NSW: Trilogy Wholesale Elect.
40 Prince Hwy, Phone 831 219

GERALDTON, WA: KB Electronics & Marine
381 Main Terrace, Phone 212 176
GOSFORD, NSW: Tomorrow's Electronics & Hi Fi
66 William Street, Phone 247 248
HOBART, TAS: Aere Electronics
123a Bathurst Street, Phone 348 232
KINGSTON, TAS: Kingston Electronics & Records
Chenell Court, Phone 298 802
LAUNCESTON, TAS: Advanced Electronics
5a The Quadrant, Phone 317 075
LISMORE, NSW: Oecro Electric
Magellan St & Brunner Hwy, Phone 214 137
MACKAY, QLD: Stevens Electronics
42 Victoria Street, Phone 511 723
MARYBOROUGH, QLD: Keller Electronics
218 Adelaide Street, Phone 214 559
MORUYA, NSW: Coastal Electronics
43 Vulcan Street, Phone 742 545
MT GAMBIER, SA: Hutchesson's Communications
5 Elizabeth Street, Phone 256 404

MUSWELLBROOK, NSW: Silicon Chip Electronics
Suite 3, 98 Bridge Street, Phone 43 086
NAMBOUR, QLD: Nambour Electronic Shop
Shop 4, Lowan House, Ann St, Phone 611 804
NEWCASTLE, NSW: Elektron 2000
181 Wharf Road, Phone 262 844
ORANGE, NSW: M&W Electronics
46 McNamara Street, Phone 628 491
ROCKHAMPTON, QLD: Purely Electronics
15 East Street, Phone 21 056
SOUTHPORT, QLD: Amateur's Paradise
121 Nang Street, Phone 322 644
TAMWORTH, NSW: Sound Components
76 Brisbane Street, Phone 861 363
TOOWOOMBA, QLD: Hunts Electronics
18 Neil Street, Phone 328 944
TRARALGON, VIC: Power'n'Sound
15 Franklin Street, Phone 743 636
VINCENT, QLD: Tropical TV
248 Fulham Road, Phone 791 421

WAGGA, NSW: Wagga Wholesale Electronics
82 Forsyth Street
WINDSOR, NSW: Hawkesbury Electronic Centre
111 George Street, Phone 773 411
WOONONG, VIC: A & M Electronics
76a High Street, Phone 244 566
WHYALLA, NORRIS, SA: Mollor Enterprises
Shop 2, Forsyth Street, Phone 454 784

WOULD YOU LIKE TO BE A DICK SMITH RE-SELLER?

How would you like to join the hundreds of successful Dick Smith re-sellers, spread right across Australia? If you're interested, why not give our wholesale division a call - Sydney (02) 888 3200, 9AM - 5:30PM weekdays. It could be the start of something big...



**LOOKS LIKE
A NORMAL
LED—RIGHT?**

IT'S NOT!

Incredible! Inside this normal size LED package is not only the LED, but a tiny IC chip which makes the LED flash! Just think of the millions of applications for flashing LEDs already: until now you needed external circuitry! Just hook this one up and away it goes!

\$150
Cat Z-4000

**SPECIAL PRICES
AVAILABLE TO
LARGE QUANTITY
BUYERS!**

**A 600 MHz DFM
UNDER \$200?**



Cat O-3000

Sounds almost impossible to believe? Yes, a beautifully made, 7 digit 600MHz digital frequency meter for less than you paid for your 100MHz version last year! Battery operated, (use Nicads if you like), highly accurate, and tiny: fits into one hand! Hurry, strictly limited stock of this item — don't say you weren't warned!

**YES!
ONLY
\$199!**

Ni-cad batteries (4 req)
Cat S-3300 \$2.05 ea
Power supp. charger
Cat M-9525 \$9.50

Dear Customers...

Quite often, the products we advertise are so popular they run out within a few days. Or unforeseen circumstances might hold up goods so that advertised lines are not in the stores by the time the advert appears. Please don't blame the store manager or staff: they cannot solve a dock strike on the other side of the world, or even locate a shipment that has gone astray.

What we are trying to say is that, if you're about to drive across town to pick up a particular line at a Dick Smith store, why not give the store a ring first (addresses & phone numbers below) — just in case! Thanks

Dick Smith and Staff

**WOULD YOU LIKE TO
WORK WITH US?**

Dick Smith Electronics is expanding — if you've been watching your local press you'll probably have noticed this already!

Opening new stores requires new staff. Good staff. Electronics enthusiasts who can be trained to become professional sales people and managers. If you're talented and enthusiastic, we offer good wages and conditions. If you're above average, promotion can be very rapid. (One of our salesmen became general manager three years later!)

No matter what area you live in, if you'd like to work with us, drop us a line. When we open a store in your area, we'll be in touch...

Send your application to:
The Personnel Manager,
Dick Smith Electronics Pty Ltd
PO Box 321,
North Ryde, NSW 2113

**MICROPROCESSOR CONTROLLED
MINI ORGAN!**

Amazing microcomputer technology! This is much, much more than a take-anywhere 'organ'. Inside this remarkable device is a microcircuit memory which makes this an incredibly versatile instrument. Look what it does:

- Plays any one of 8 tunes permanently stored in memory
- 'Remembers' up to 96 notes and spaces — so you can 'compose' your own music and play it back again later!
- Or you can use it as an organ and play a merry tune!

It is battery operated, so you can take it anywhere!

Liberate, eat your heart out...

Batteries extra

GREAT GIFT IDEA!



\$29.50
X-1158

**JOIN THE 'IN' SET...
NEW CORDLESS PHONE!**


You must have seen these around and thought 'Wow! Imagine: a portable 'phone' you can carry around with you and take calls up to a few hundred feet away from your main phone! Not only that, you can make calls — even re-dial automatically! It would have to be the handiest thing since sliced bread, for the home, office, etc. ... price! Save with Dick Smith bargain imports.

It works by radio: the 'master' unit plugs into the phone lines and the power. If a phone call is received, it transmits the call to the pocket-sized 'remote' unit. The master also contains a battery charger for the Ni-cad batteries in the remote unit. You can also 'ring' from the remote unit: push button dialling with last-number re-call.

Note: even though this unit works perfectly with the Australian 'phone' system, at present there are no regulations to allow for the testing or approval of these units. Users could, therefore, be prosecuted for connection or use of this unit.

**DON'T PAY
\$400 OR
MORE...**

**OURS IS
\$199.00**
Cat X-1178



REMOTE UNIT
(IN CHARGING
POSITION)
PUSH BUTTON
KEYPAD!
'MASTER' UNIT

1980 'ANNUALS' BARGAINS!

Because they're dated 1980 doesn't mean the information is out of date! Buy these annuals now at a big saving on this year's prices: and HUGE savings on next year's!



**\$17.95
\$11.95**
Cat B-2081

**WORLD RADIO
TV HANDBOOK**

Almost 600 pages! This is universally regarded as 'the bible' to ANYONE interested in radio and television — ANYWHERE in the world. Lists all stations, their frequencies, etc., reviews 'gear' — it's got the lot! And it's available right now at a very special price!

**AMATEUR RADIO CALLBOOKS: ALL
AREAS.**

If you're an amateur (or even an SWL) who's really interested in chasing DX stations, you cannot afford to be without these two. Between them, they list ALL known amateur radio operators in THE WORLD!
BOOK 1: US CALLS (Cat B-2260)
WAS \$21.95 **\$15.95**
2: FOREIGN CALLS (Cat B-2262)
WAS \$20.95 **\$14.95**



HERE IT IS!

At long last, Dick has his own laboratory oscilloscope. Check it out — feature for feature it compares favourably with others being offered. Dollar for dollar there is simply no comparison! Save with Dick Smith quality products for the hobbyist and professional!

Vertical Sensitivity: 10mV/division
Horizontal Sensitivity: 500mV/division
Timebase: 10Hz — 100kHz in 4 ranges
Sync: External or Internal
Bandwidth: DC to 5MHz
Cat O-1280

\$199.00



**SCOOP PURCHASE
1978
ARRL'S**

We made a scoop buy of all remaining stocks of the 1978 ARRL H BOOK at below cost price! Buy now and save current (1980) cost is near \$16! Hurry — they're selling fast! Cat B-2218

ONLY \$2.50

Seasons Greetings

Dick Smith and staff
wish all our customers
and friends the
compliments of the
season — and hope to
be of service to you
again in 1981.



**ALL-CHANNEL
TV ANTENNAS**

With the new channels in Sydney & Melbourne, you're probably finding the old antenna just isn't up to scratch. Fix the problem yourself at a fraction of commercial installation costs: with a new all-band antenna from Dick Smith.

Our biggest seller for good 0-2-7-9-10 reception in metro & near fringe areas.
Cat L-4022

\$34.50

The big gun for more difficult areas. 75 ohm. Use co-ax or twinlead. Cat L-4030

\$54.50

UHF ANTENNA

Specially made for Dick to suit Australian standards. Adjustable directivity in 2 directions: very important for good UHF reception. Uses standard 300 ohm ribbon. too. Cat L-4028

\$19.95

**A CCTV SYSTEM
FOR UNDER \$400!**

- SECURITY
- SURVEILLANCE
- MONITORING
- HOME, OFFICE
- INDUSTRY

Think of the applications! Extremely simple to set up, light weight and portable (240V system). Compare the price of this system with others: and you can still watch TV when it's not being used as a monitor!
TV Camera: Cat X-1195
12" TV Monitor: Cat X-1198



BOTH FOR \$398

(Items available separately: Camera \$299; TV \$99)


SUMMER TIME IS PROJECT BUILDING TIME.

**BIG SAVINGS ON DICK'S GENUINE
SLOTTED ZIPPY
BOXES.**

More projects have been built in genuine Dick Smith Zippy Boxes than in any other case!! And since Dick introduced the slotted Zippy box, constructors have really been happy! No more drilling: just make the project board the right size and it simply slots in place! What could be easier?

And now Dick has ordered massive price cuts — for December only — on the three most popular Zippy Boxes. Grab some now and save: you'll never know when you'll need them!

Size Cat No Was Now
150x90x50 H-2751 \$2.50 **\$1.98**
130x68x41 H-2753 \$1.95 **\$1.59**
83x54x28 H-2755 \$1.50 **\$1.19**



**LOOK FOR
THE SLOTS!**

**BE SURE YOU ASK FOR
GENUINE DICK SMITH
ZIPPY BOXES—THEY'RE
THE ONES THE MAGS
BUILD PROJECTS IN!**

In the past, many customers have wanted to buy a particular project case to build other projects in — maybe to match up with an existing project, or simply because the case was so versatile. We normally couldn't do this: but, once again, we've seen the error of our ways — and released three of our most-asked-for cases to be normal stock lines. While they're intended for specific projects (holes and all!) a simple dress panel on them and they will suit just about anything!

FOR SMALL

A neat folded aluminum case at a bargain price. Originally intended for CDIs, it measures 172 x 125 x 55mm. If you're building a project with any 2N3055s in it, lucky you! The holes are there already! Cat H-3107



FOR MEDIUM PROJECTS

Here's a bargain! This passivated steel case with vinyl covered lid was selling for almost \$11! Suits variety of projects, holes suits 'Musicolor' but add your own dress panel and it suits anything! Size is 250 x 200 x 80mm
\$7.95
Cat H-3160

FOR LARGE PROJECTS

Or this one made for the 'Play-master' amplifiers, size is a whopping 270 x 250 x 80mm. Holes for pots, switches, terminals etc. Was \$12.50
\$9.95
Cat H-3110

DICK SMITH ELECTRONICS

NSW 145 Parramatta Rd
613 Princes Hwy
818 George St
531 Pittwater Rd
147 Hume Hwy
162 Pacific Hwy
30 Grose Street
125 York Street
263 Keira Street

AUBURN 648 0558
BLAKEHURST 546 7744
BROADWAY 211 3777
BROOKVALE 93 0441
CHULLORA 642 8922
GORE HILL 439 5311
PARRAMATTA 683 1133
SYDNEY 290 3377
WOLLONGONG 28 3800

ACT 96 Gladstone St
QLD 166 Logan Road
824 Gympie Rd
60 Wright Street
399 Lonsdale St
656 Bridge Road
Dandenong Rd
414 William St

FYSHWICK 80 4944
BURANDA 391 6233
CHERMSIDE 59 6255
ADELAIDE 212 1962
MELBOURNE 67 9834
RICHMOND 428 1614
SPRINGVALE Open soon
PERTH 328 6944

DICK SMITH MAIL ORDER CENTRE:
PO Box 321, North Ryde NSW 2113. Phone (02) 888 3200

SERVICE CENTRE: LANE COVE & WATERLOO RDS, NORTH RYDE NSW 2113.
PHONE (02) 888 3200. HOURS 9AM TO 5PM, MONDAY TO FRIDAY ONLY.

**COMPUTER
HOTLINE**

Want to know more about our computers? Or maybe you're having problems and need advice. For friendly, helpful information on System 80 or Sorcerer computers, or on any of our peripherals, phone our Computer Hotline: Monday — Friday, 9 — 5.30 on Sydney (02)

888 2002

BUYING BY MAIL?

ORDER VALUE: P&P
\$5 (min) to \$9.99 \$1.00
\$10.00 to \$24.99 \$2.00
\$25.00 to \$49.99 \$3.00
\$50.00 to \$99.99 \$4.00
\$100 or more \$5.50

NOTE: These charges apply to goods sent by post in Australia only. Large and bulky items cannot be sent by post. If you prefer, we will despatch your order by Comet Road Freight to anywhere in Australia for only \$5.00 — that's below what it costs us! Large and bulky items are normally sent by Comet: unless you specify differently (eg by rail or air — you pay freight on delivery)



SHOP HOURS: 9AM TO 5.30PM MONDAY TO FRIDAY; NOON SATURDAY (Brisbane stores half hour earlier). Some stores are open on late shopping nights: please phone your local store to check before coming in!



DAVID EAST COMPONENT CENTRE

has been open for just over 12 months now. I would like to take this opportunity to wish all the readers of ETI magazine a happy Christmas and to thank them for their tremendous support over the past year.

* * * * *

Remember, for ideal Christmas gifts at very reasonable prices, come and see us for

- Radio/Cassettes
- Digital Clock Radios
- Novelty Radios


ALSO

A large range of electronic components and accessories.

DAVID EAST COMPONENT CENTRE

33A Regent Street, Kogarah NSW
(Opposite Kogarah High School)
Phone 588-5172

DO YOU WORK IN ELECTRONICS BUT PREFER IT AS A HOBBY ?



WANT TO GET PAID TO PURSUE THAT HOBBY ?

Then we'd like to speak to you. We're looking for someone to join our project design team here at ETI. If you think you have the ability to design projects like you've never seen in ETI then write or phone us now. Age and qualifications are of secondary importance to ability and experience. Pay and working conditions are comparable to or better than generally found in the industry.

Phone, or write to:

Roger Harrison, Editor ETI

15 Boundary St

Rushcutters Bay NSW 2011

(02)33-4282.

LOOPY VIDEO

Shop: 418 Bridge Road, Richmond, Vic.
Mail: PO Box 347, Richmond, 3121, Vic.

Second hand video recorders and tapes,
cheap. Also new.

OSI HARDWARE FOR OHIO COMPUTERS

Superboard II.....\$367.00
SII Covers/VDU Stands (plastic).....\$18.95
RF Modulators 5/9V.....\$19.95
4K RAM (IC's) Kits.....cheap
EPROM with single Key Basic and
Cursor control.....\$54.95

OSI SOFTWARE FOR OHIO COMPUTERS

Almost 100 varieties for C1P/SII.
Many available for C2/4P; enquire.
Categories are: Games, Education, Business, Text,
Instructions (Modifications), and Utilities.
K.2 Catalogue, Brief descriptions of all programs,
free hints. New enlarged version. \$3.50 plus \$1.00
P&P.

Example of titles:

G33. Grand Prix.....\$9.95
G28. Death Ship (2 tapes).....\$18.95
U16. Filename (tape).....\$8.95
U19. Cursor/Editor C2/4.....\$11.95
U20. Mini-Assembler.....\$9.95
U21. Single Key Basic.....\$9.95

Now available blank digital tapes.
C10 \$1.85 ea. Less for lots of 10 or 100.

Mail orders allow postage. eg: OSI Software 1 or 2
\$1.00, 3-5 \$1.50, 6-9 \$2.00, 10 or more items \$2.50.

All prices INCLUDE sales tax.

Prices subject to change without notice.

pH ELECTRODES

Complete with buffers

- Combination pH electrode
- Non flow (sealed) type
- Polypropylene body
- Australian made
- Ideal for pH meter kit!

\$38.00

Plus 15 percent sales tax.

Plus \$2.00 postage & packing.

Total price incl. tax \$45.70

Price includes ELECTRODE plus:

- Electrode plastic protector cap
- Wetting cap for storage
- 200ml buffer pH 6.88
- 200ml buffer pH 4.00
- Comprehensive pH booklet

Accessories available (prices plus 15% tax)

- 100ml plastic beakers \$1.50 ea.
- 250ml plastic (squeeze) wash bottle \$1.50 ea.
- Combination Spear Electrode \$50.00



We also offer a comprehensive range of Australian made electrodes and meters for pH, selective ion, conductivity, dissolved oxygen and temperature for laboratory, field and process control applications.

Trade and Dealer enquiries
welcome.

Send orders and enquiries to:



PO Box 151, Frenchs Forest,
NSW 2086.
Phone (02) 451-1346.

A 'discriminating' metal detector

This metal detector operates just like the 'bought ones' but costs only one-third to one-half as much to build it yourself. It features three 'discriminate' ranges plus VLF operation and includes an 'auto-tune' button.

design: **Lee Allen, Altek Instruments, UK**
article: **Phil Wait**

"GOLD FEVER," shrieked the news headlines following the finding of the 27 kg Hand of Faith nugget at Wedderburn in Victoria recently. It was unearthed by a couple of amateur fossickers using a metal detector, just about the most sophisticated tool ever brought to bear in the hunt for gold.

Designs for metal detectors genuinely able to discriminate between 'trash' and 'treasure' have generally been well kept trade secrets. Even the general principles of operation have been veiled in mystery. However, we are indebted to Lee Allen of Altek Instruments of the UK for providing us with the circuit design of this metal detector project via our British edition. The design incorporates all the features and refinements of modern commercially-made instruments and features performance equivalent to units costing two to three times as much.

Principles of operation


This detector employs the basically well-known *induction balance* technique to detect the presence of a metallic 'target' in the ground, but includes a number of refinements which respond to certain characteristics of the target. The 'search head' contains two coils: an outer coil which is connected to a low frequency oscillator operating somewhere in the range 15 - 20 kHz, and an inner coil which is placed so that it is

only very loosely coupled to the outer coil. The latter is connected to the 'receiver' input of the instrument. Being only very loosely coupled, the signal induced in the receiver (inner) coil from the transmit (outer) coil is very small when a target is not in the vicinity of the search head.

When the search head approaches a metallic target, the target will have a number of influences on the two coils. Firstly, the magnetic field pattern of the transmit coil will be disturbed, and thus the coupling between the transmit and receive coils will be increased. This generally produces an increase in the signal from the receive coil. In simple induction balance detectors, such as the ETI-549 (May 1977), this signal increase is detected and used to gate an audio oscillator on so that a tone is passed to a speaker or headphones.

That's all quite straightforward, but there are other influences to be taken into account. The ground in which a target is buried can have quite a profound effect on the coils in the search head. Firstly, if the ground is basically non-conducting, then it will have a permeability considerably different to that ►

Project 1500

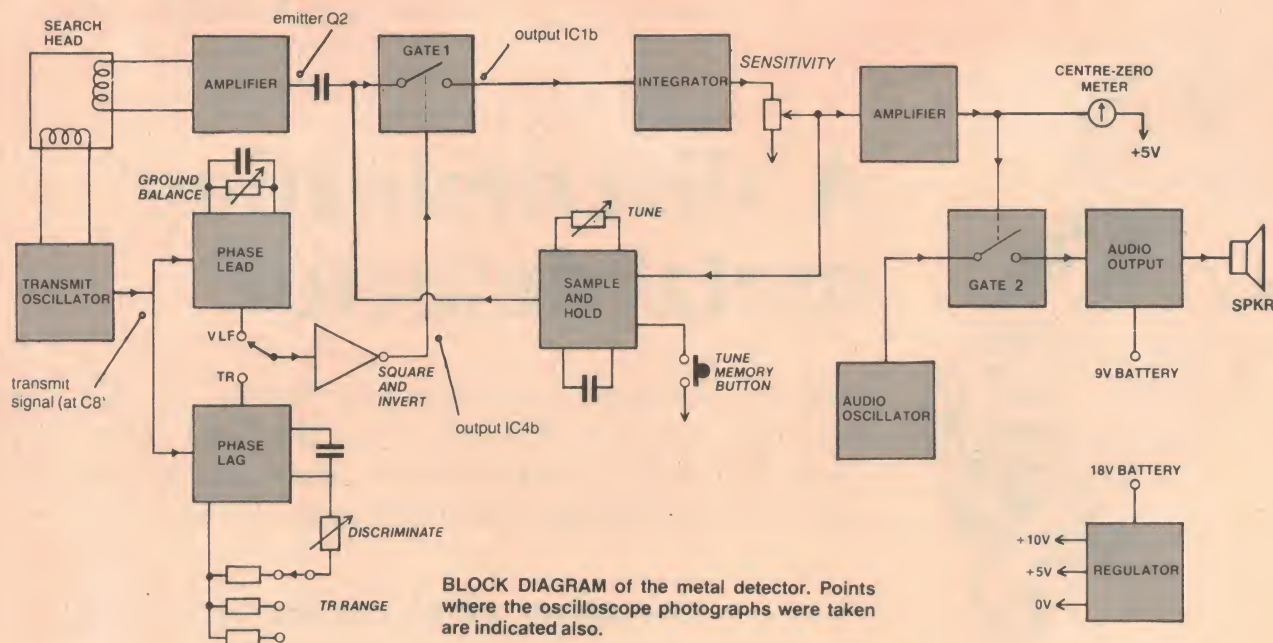

of air. This will affect the coupling between the two coils in the search head, increasing the coupling if the transmit and receive coils are initially set up away from the influence of the ground. You can compensate for this effect by physically varying the position of one coil in relation to the other when the search head is near the ground. However, different soils will have different compositions and thus have different values of permeability — even within quite a small area. The best way to compensate is by electronic means and we'll go into that shortly.

If the soil contains an appreciable amount of iron minerals (maghemite, hematite etc ... often referred to as "iron stone soils"), or mineral salts of one type or another, then it will be partly conducting.

Such soils will have a permeability often greater than basically non-conducting soils, affecting the coupling between the coils in the search head in a similar way to that just explained. Again, as the composition of the soils varies, so will the coupling. Another effect is that of 'eddy currents' induced in the conductive soil. The ac magnetic field of the transmit coil will induce a current in the ground beneath the search head and the eddy current has an effect opposing the permeability effect of the soil — and the whole effect varies in a complex and unpredictable way as you sweep the search head over the ground.

The only way to compensate for these varying, and generally unpredictable effects, is to devise circuitry that 'recognises' the effect.

Permeability effects will vary the phase as well as the amplitude of the signal coupled into the receive coil from the transmit coil while eddy current effects vary the amplitude. Knowing that, one can devise appropriate circuitry to take the effects into account.

However, we need to know how a metallic target affects the phase and amplitude of the receive signal. If the target is ferrous, it will have a much greater effect on the magnetic field of the transmit coil than will the surrounding soil as its permeability is greater and it will 'bend' or concentrate the field lines to a much greater degree. If the target is non-ferrous it will have a permeability effect opposite to that of ferrous targets, deflecting the field lines, but eddy currents also have some influence.

The eddy current effect in a target depends on the electrical and physical characteristics of the target. Metals which are good conductors will have greater induced eddy currents than metals which have a higher resistivity. It is a fortunate accident of nature that gold and silver are good conductors (low resistivity) while iron (especially if it's oxidised or rusty) is not so good a conductor.

If the target is ring-shaped then the eddy current effect is enhanced, whereas if it's a broken ring or just a peculiarly-shaped mass, the eddy current effect is less pronounced. The 'attitude' or orientation of the target will also affect the eddy current effects. If the main plane of the target object is aligned such that the field lines from the transmit coil cut it at right angles,

then the eddy currents induced will be at a maximum. If the main plane of the target is aligned parallel to the transmit field then the eddy currents induced will be at a minimum. Obviously, the attitude of the target with respect to the transmit coil's field will vary as the head passes over it and the eddy current effect will vary accordingly — it may not be maximum beneath the centre of the search head.

The permeability and eddy current effects combine in the receive coil and the signal varies in phase and amplitude in characteristic ways.

The instrument

The best way to understand how this instrument operates is to look at it in block diagram form. The accompanying diagram shows the basic circuit blocks employed. The transmit oscillator drives the transmit coil in the search head and supplies a signal to two phase control circuit blocks. The signal from the receive head is first amplified and then ac-coupled to the input of a gate (gate 1). This gate is controlled by the output from one or other of the phase control circuits via a block which 'squares up' and inverts the signal. The output gate consists of an ac signal superimposed on a dc level. This passes to an integrator which obtains the average dc level of the composite signal. This is then passed to both a dc amplifier which drives a centre-zero meter, and to a 'sample and hold' circuit. The output of this block provides a dc level to the input of gate 1 which is a measure of the average dc level of the composite signal. The initial dc level applied to the

input of gate 1 is actually established by the *tune* control. Thus, a dc negative feedback path is provided.

In addition to meter indication, an audio indication is provided. The output of the dc amplifier driving the meter controls a gate which switches on or off the output of an audio oscillator. This is applied to an audio amplifier and an on-board loudspeaker or headphones.

Power for the audio amplifier is provided by two 9 V batteries in parallel. The rest of the circuitry requires two supply rails at +10 V and +5 V with respect to the common rail (0 V). This is supplied by a regulator from an 18 V source consisting of two 9 V batteries connected in series.


Initially, the instrument is set up in the 'VLF' mode. The search head is held in the air and the *tune* control adjusted to bring the meter to centre zero. This is done with the *tune memory* button depressed. This activates the sample and hold circuit, storing the dc level set by the feedback loop in the capacitor of the sample and hold block. Thus, a particular dc level at the output of the integrator corresponding to meter centre zero is set up.

The search head is then lowered to the ground. Naturally, this will upset the coupling between the transmit and receive coils and the output at gate 1 will change. This will change the dc level at the output of the integrator. The *ground balance* control is then adjusted to bring the meter back to centre zero. What the ground balance circuit does is to provide a signal which leads the phase of the transmit signal and thus leads the phase of the signal induced in the receive coil without the presence of ground. The ground balance control varies the phase of this signal over a range of about four to one. Thus, when you vary the ground balance control, this varies the phase of the signal controlling gate 1, thus varying the average level of the signal passed to the integrator.

The process is then repeated until no change occurs when the search head is lowered to the ground. This establishes a 'normal' condition for the output of the integrator and the sample and hold circuit maintains the appropriate dc level at the input to gate 1 such that the meter remains at centre zero.

If the search head then approaches a metallic object, the amplitude of the signal in the receive coil will vary as the coupling between the coils and the phase of the signal will be altered by the target. This will change the average level of the composite signal out of gate


OSCILLOSCOPE PHOTOGRAPHS

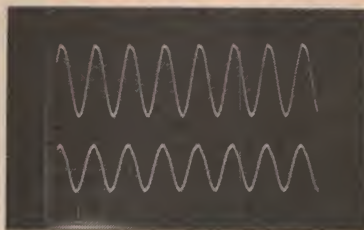


NOTE: As the effect induced by different targets is very, very small, we have had to use fairly large sample targets to show gross effects in order to demonstrate the operation of the instrument.

A) Top trace: transmit signal on C8 (Y-amp 5 V/div, ac-coupled)
Bottom trace: received signal on emitter of Q2 (Y-amp 5 V/div ac-coupled). Time base: 50 μ s/div.


VLF MODE

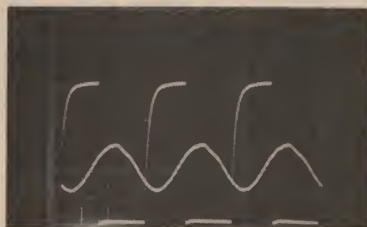


B) Received signal on emitter of Q2 (sine wave) superimposed on output of IC4b. (Both traces 2 V/div, ac-coupled; time base 20 μ s/div).

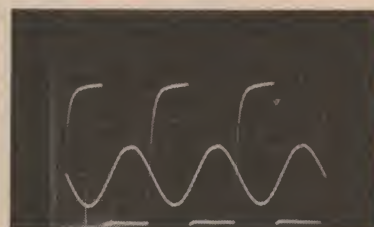

C) As per pic (B) but with aluminium target held near search head. Note the phase delay and change in amplitude of the received signal.

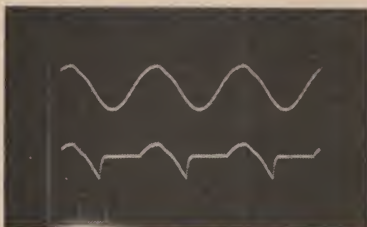


D) Top trace: received signal on emitter of Q2.
Bottom trace: output of IC1b showing composite waveform of received signal 'mixed' with a dc level. (Both traces 2 V/div, ac-coupled; time base 20 μ s/div).

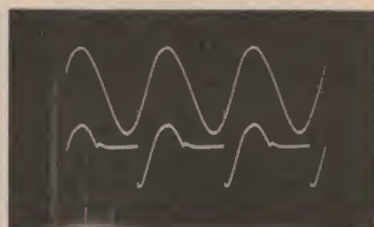


E) Same as pic (D) but with metal target near the search head. Note the increase in average dc level from the output of IC1b. The change in this signal is much larger for non-ferrous than for ferrous metals.


DISCRIMINATE MODE

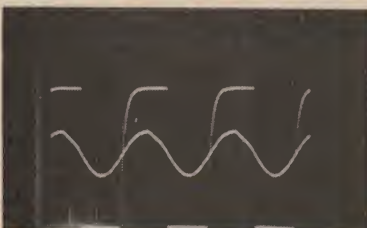


F) Received signal on emitter of Q2 (sine wave) superimposed on the output of IC4b. The phase difference between the two signals is adjustable through 180° by use of the course (TR1, TR2, TR3) and fine 'discriminate' controls. (Both traces 2 V/div, ac-coupled; time base 20 μ s/div).

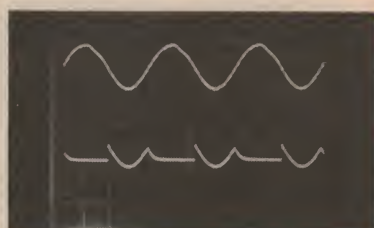


G) Top trace: received signal on emitter of Q2. Bottom trace: output of IC1b showing composite waveform of received signal 'mixed' with a dc level. Detector set to TR1 mode, discriminate control to 9. (Both traces 2 V/div, ac-coupled; time base 20 μ s/div).

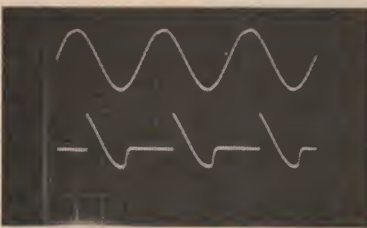

H) As per pic (G) but brass target held near search head. Note the increase in the average dc level of the signal at the output of IC1b.

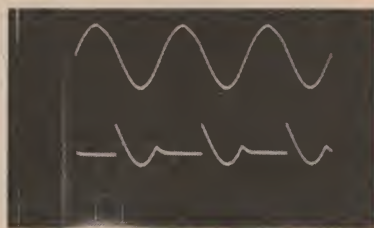

I) As per pic (G) but steel target held near search head. Note the decrease in average dc level of the signal at the output of IC1b, illustrating discrimination.

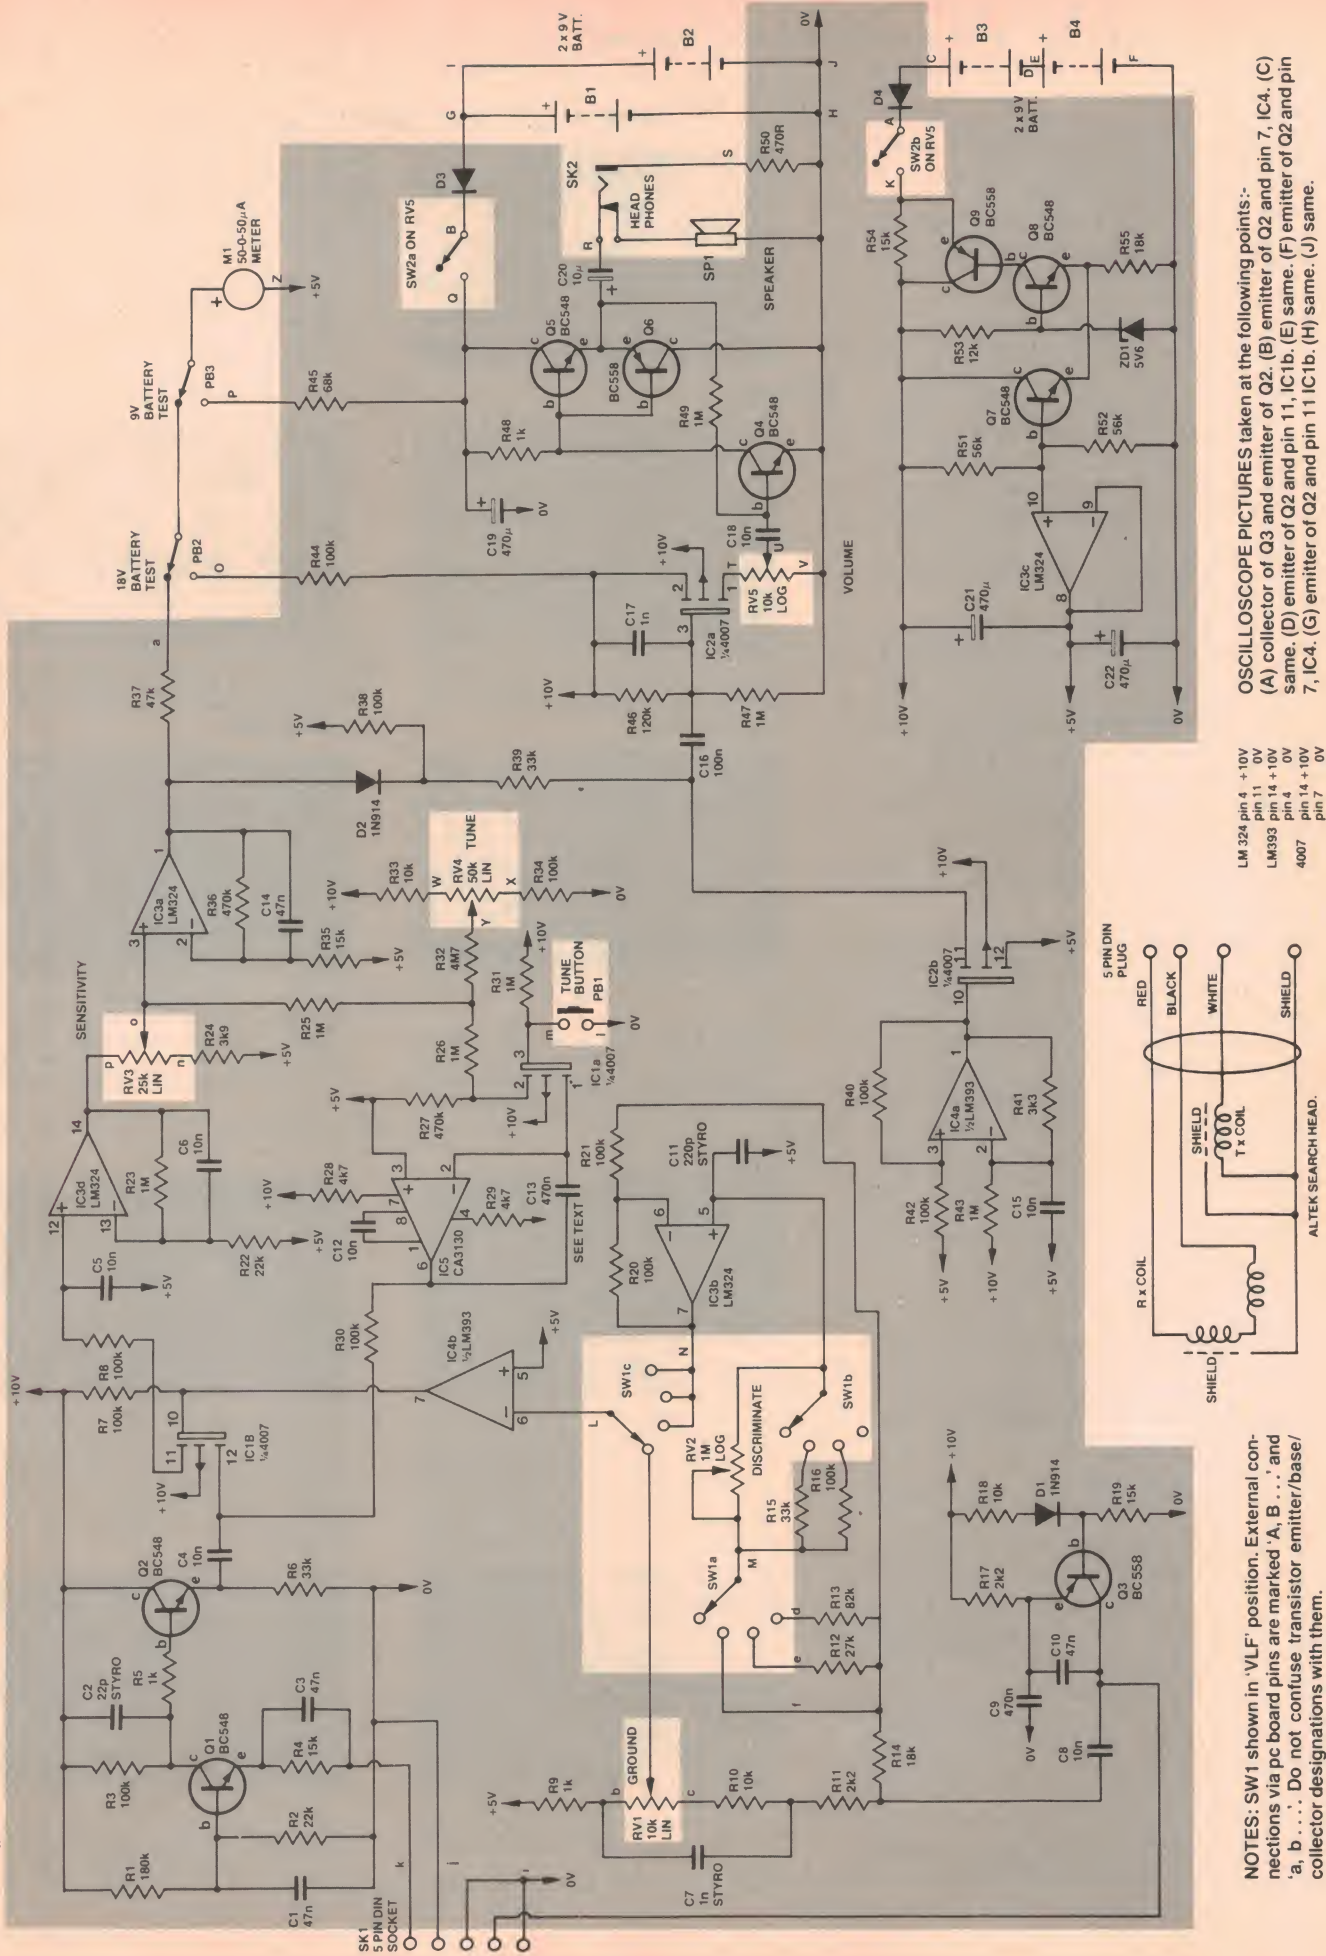

FEATURES

- VLF and T/R operation
- Three ranges of 'discriminate' (T/R) operation
- Can tune out aluminium ring-pull tabs
- Ground balance circuitry included
- Tune memory ('auto-tune') button

- High sensitivity (will detect 20¢ piece at depths over 250 mm)
- Pre-wound and aligned waterproof search head
- Straightforward construction, no alignment necessary
- Low battery drain
- Uses common No. 216 transistor radio batteries
- Costs around \$200 in kit form

HOW IT WORKS — ETI 1500

As the general principles of operation have been discussed with regard to the block diagram in the text, this description is confined to the circuit alone.

Commencing with the transmitter, Q3 is configured as a Colpitts oscillator, the transmit coil in the search head forming the inductance which resonates with the combination C9 and C10. Bias is applied to Q3 via R18, D1 and R19. Emitter bias is provided by R17. The transmit signal to the phase-lead and phase-lag circuitry (ground and discriminate controls) is tapped off the collector of Q3 via C8 to the junction of R11 and R14. The ground control circuitry connects via R11 while the discriminate circuitry connects via R14.

The signal from the receive coil is amplified by Q1 and applied to gate 1 (see block diagram), one CMOS gate in IC1 (IC1b), via an emitter-following buffer stage, Q2. Note that Q1 is operated as a grounded-base amplifier. The phase of the received signal through Q1 and Q2 is not altered. Output from the emitter of Q2 is applied to the drain of IC1b.

The base of IC1b is driven by a square wave derived from the transmit signal, the phase of which can be varied by either the ground or discriminate controls.

In the VLF mode, the phase of the transmit signal tapped off from Q3 can be varied using RV1. This provides a phase-advanced signal that can be varied over the range from about +10° to +40°. A leading phase RC network is formed by R10 and RV1 in conjunction with C7. This signal is applied to the inverting input of an op-amp, IC4b. As this is operated at maximum gain with a high signal level at the input, it will 'square up' the signal at its output (pin 7), which drives the gate of IC1b.

In the discriminate mode, switch SW1 connects the transmit signal to circuitry which provides a lagging phase signal which can be varied over a range set by RV2 (the discriminate control) and a set of 'range' resistors: R12, R13, R15 and R16. These form a lagging phase RC network in conjunction with C11. The signal is then buffered by a non-inverting

level at the output of IV3a goes higher than 0.6 V above the bias applied to the cathode of D2, will IC2b be biased on.

The audio oscillator involves IC4a, configured as an astable multivibrator operating at a few hundred Hertz. The output, pin 1, is applied to the gate of IC2b. When IC2b turns on, the signal is applied to the input of the audio output stage.

One gate from IC2 is biased into its linear region and acts as a source-follower buffer at the input of the audio output stage. The volume control, RV5, is the source resistor for this stage and the output is taken from the wiper of RV5 to the base of Q4, capacitively coupled via C18.

The output stage is a simple complementary class-B stage employing a low power NPN/PNP transistor pair. The collector of Q4 drives the output stage, its collector load also providing bias to the output pair (R48). Both dc and ac feedback is applied to the base of Q4 by R49 from the output. Audio output can be from an 8 ohm speaker or headphones, via a dc isolating capacitor, C20. Headphone volume is reduced by a 470 ohm resistor, R50, in series with one lead to the headphone socket, SK2.

Power supply for the circuitry is split into two parts. The audio output stage is supplied by two 9 V batteries connected in parallel (B1 and B2). These are connected via a reverse-polarity protection diode, D3, and one pole of SW2 which is a switch on RV5.

The rest of the circuitry requires a +10 V and a +5 V rail, with respect to the common rail (0 V). This is derived from two 9 V batteries, B3 and B4, connected in series and applied to a regulator circuit via a reverse-polarity protection diode, D4, and the other pole of SW2. The regulator is basically a conventional series-pass circuit, Q9 being the regulator transistor.


The zener diode ZD1 provides a stable reference voltage for a differential pair, Q7 and Q8, the latter controlling the base current to Q9. Resistor R54 allows a small amount of current to pass to Q7/Q8 at switch-on to ensure the regulator 'starts' correctly. The base

of Q7 is biased at half the upper supply rail voltage by R51 and R52. This voltage is buffered by an op-amp, IC3c, configured as a voltage follower, and used to drive the +5 V line. Decoupling is provided by C19, C21 and C22. Note that 'battery test' facilities are provided by R44/PB2 for the 18 V supply and by R45/PB3 for the 9 V supply.

TUNING

During the tuning operation, when the instrument is being initially set up, the circuit works in the following way: With the tune memory pushbutton operated, IC1a is gated on and a dc negative feedback loop is established from the output of the sensitivity control, back to the input of gate 1, the drain of IC1b, via the sample and hold circuitry. A portion of the voltage from the wiper of RV3 is added to the voltage determined by the voltage divider R33, RV4 and R34. This is applied to the source of IC1a. As the tune memory button is pressed, IC1a is conducting and capacitor C13 will charge to the value of the composite voltage applied to the source of IC1a. The op-amp IC5 is a low input current device and the output, pin 6, will settle at a value equal to the composite voltage applied to its non-inverting input (pin 2). This dc level is applied to the source of IC1b and the signal output from the receive coil amplifier is mixed with it. This will bring about a reduction in the dc level of the signal applied to the integrator input, and thus a reduction in the dc level at the input of IC1a and, within a second or two, a new dc condition is established. When the dc level around the loop settles, the meter will read zero (centre) and the tune memory switch is released. The dc level at the output of IC5 (and thus at the drain of IC1b) is maintained by the charge on capacitor C13. In practice, it will drift very slowly, as C13 will be gradually discharged by the input current of IC5 and the capacitor's own leakage. For this reason, the tune memory button is located on the crook of the handle where it can be operated by your thumb every now and then to re-centre the meter.

Project 1500

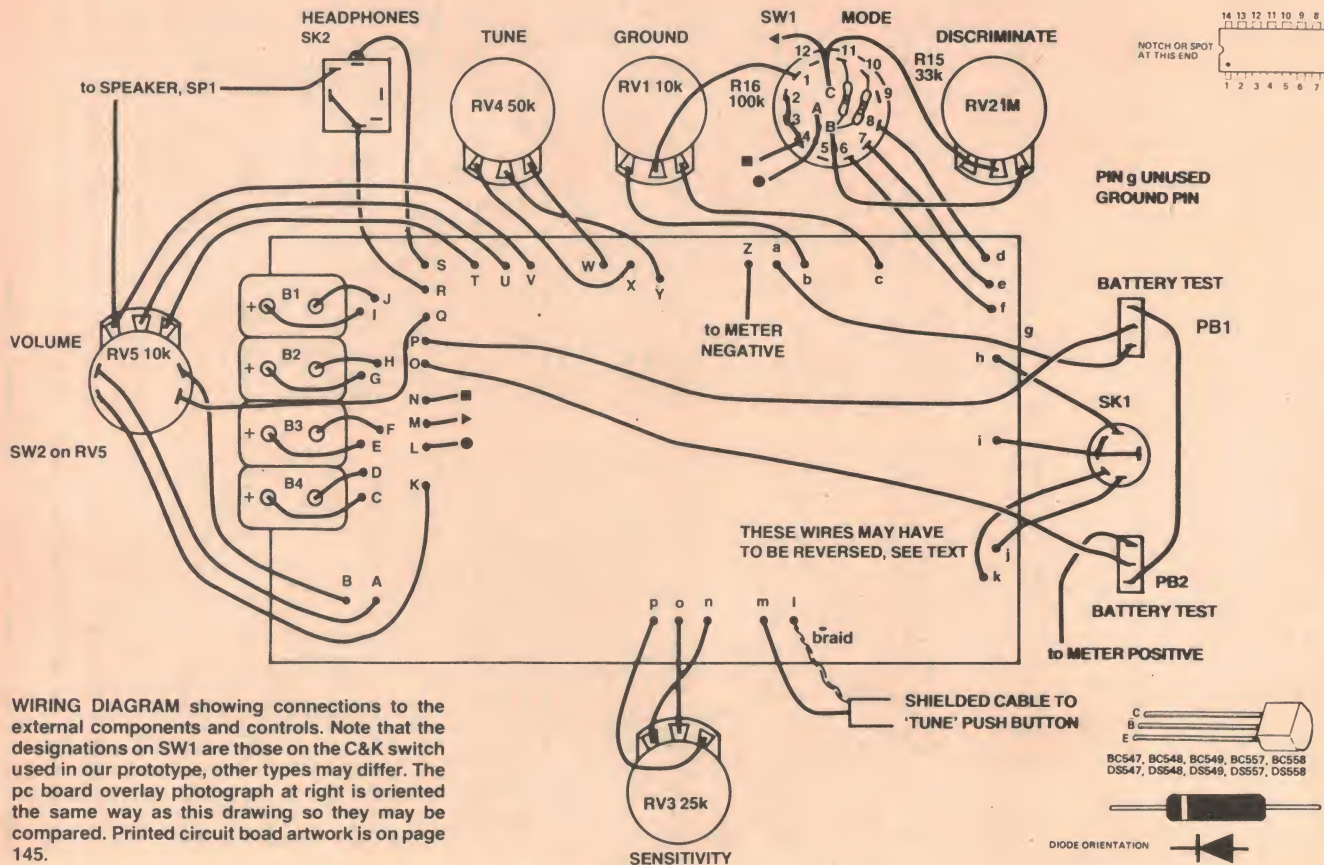

PARTS LIST — ETI 1500

Resistors all 1/2W, 5%.

R1	180k
R2, 22	22k
R3, 7, 8, 16, 20, 21, 30, 33, 34, 38, 40, 42, 44	100k
R4, 19, 35, 54	15k
R5, 9, 48	1k
R6, 15, 39	33k
R10, 18	10k
R11, 17	2k2
R12	27k
R13	82k
R14, 55	18k
R23, 25, 26, 31, 43, 47, 49	1M
R24	3k9
R27, 36	470k
R28, 29	4k7
R32	4M7
R37	47k
R41	3k3
R45	68k
R46	120k
R50	470R
R51, 52	56k
R53	12k

Capacitors

C1, 3, 10, 14	47n greencap
C2	22p styroal
C4, 5, 6, 8, 12, 15, 18	10n greencap
C7	1n styroal
C9	470n greencap
C11	220p styroal
C13	470n polycarbonate or styroal
C16	100n greencap
C17	1n greencap

C19, 21, 22	470μ, 16V electrolytic
C20	10μ, 16V electrolytic

Potentiometers

RV1	10k linear
RV2	1M log.
RV3	25k linear
RV4	50k linear
RV5	10k log pot with DPST switch

Semiconductors

D1, 2, 3, 4	1N914, 1N4148
ZD1	5V6, 400mW zener diode
Q1, 2, 4, 5, 7, 8	BC548, BC108
Q3, 6, 9	BC558, BC178
IC1, 2	4007
IC3	LM324
IC4	LM393N
IC5	CA3130N

Miscellaneous

SW1	three-pole, four position wafer switch; C&K type RA
SW2	on RV5 (DPST switch)
PB1, 2, 3	SPST miniature momentary push buttons, push to make
M1	50-0-50 μA meter, see text
SK1	5-pin DIN socket
SK2	shorting type jack socket
SP1	small eight ohm speaker (75 mm dia.)
B1 - B4	nine volt transistor radio batteries (type 216)
Four battery clips for No. 216 batteries; ETI-1500 pc board; case (see text); handle (see text); search coil (see text); knobs; length of ribbon cable; two metre length of shielded cable; double-sided sticky tape to hold batteries in position, or a suitable clamp.	


1 and thus the dc level at the output of the integrator will change. This will be amplified and the meter will show an indication. Also, gate 2 will be operated and a tone will be heard in the speaker.

However, this method of operation will not indicate the difference between the characteristics of different targets.

In the discriminate or TR mode, the ground balance control is not used. The instrument is initially set up using the *tune* control to bring the meter to centre-zero. The difference tTR ranges permit varying degrees of control with the *discriminate* potentiometer. The phase-lag circuit block generates a signal which lags the phase of the transmit signal and the discriminate control provides a phase-variable signal to drive gate 1.

When a ferrous target is approached, the combined permeability and eddy current effects tend to reduce the amplitude of the signal picked up by the receive coil. This will cause a reduction in the dc level of the signal out of gate 1 and a reduction in the dc level out of the integrator. Thus, the meter will move to the negative (left hand) side of the scale. This side of the scale is marked "bad", obviously.

When a non-ferrous target is approached, the combined eddy current

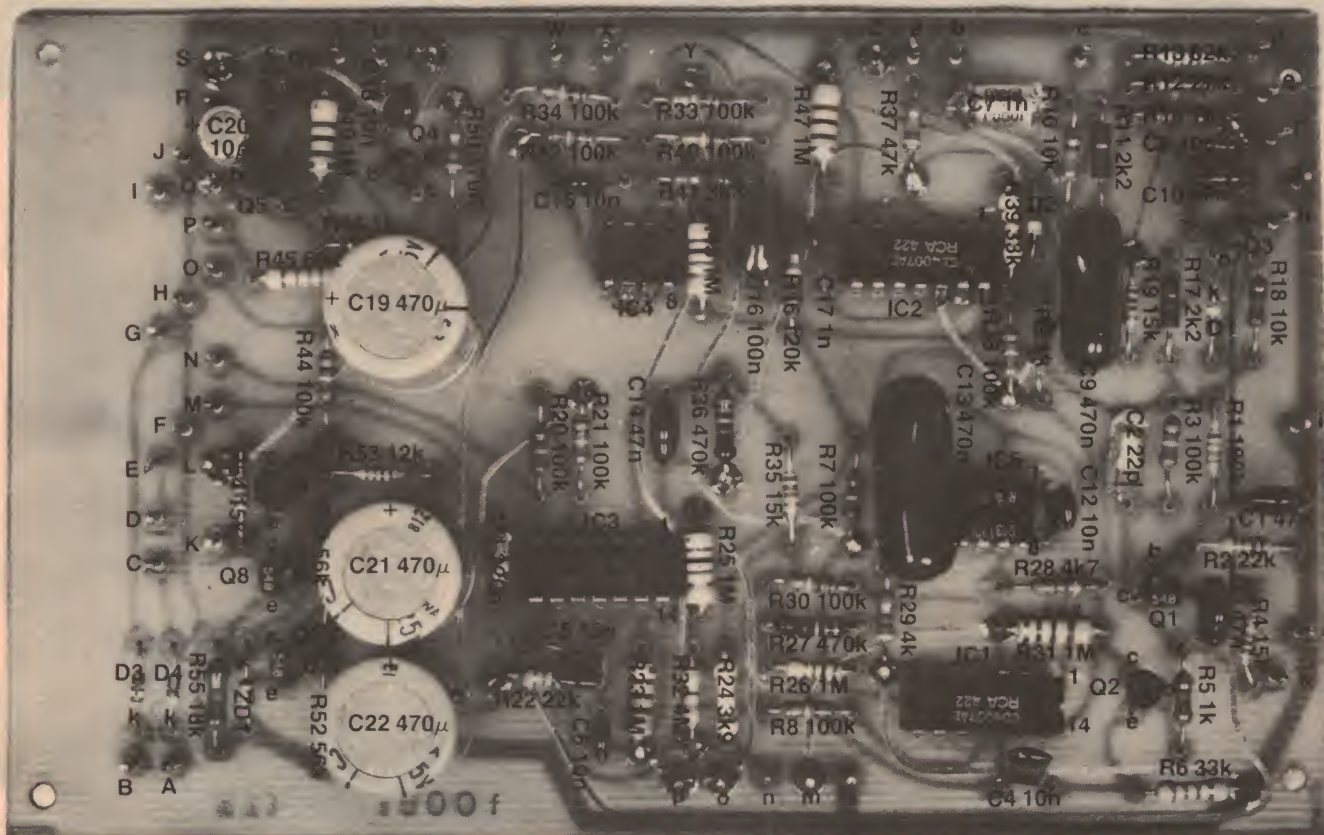

and permeability effect tends to increase the amplitude of the signal picked up by the receive coil. This will cause an increase in the dc level of the signal out of gate 1 and an increase in the dc level out of the integrator. The meter will thus move toward the positive (right hand — "good") end of the scale.

The effects we are considering are actually quite small, hence the circuit has a considerable amount of dc gain.

Gate 2 only operates when the output from the dc amp increases (goes positive) and thus the audio output is only heard in the discriminate mode when the meter shows "good".

It is unfortunate that ring-pull tabs from drink cans are aluminium and thus indicate along with other non-ferrous metals. But, the discrimination ability of the instrument can be adjusted to exclude the small effect these targets generate — along with small trinkets, the smaller gold nuggets, etc — but who wants the tiddlers anyway!

If the dc level applied to the input of gate 1 drifts — and it may do for a wide variety of reasons, operating the *tune memory* button will restore the balance of the circuit and re-centre the meter. Quite a cunning arrangement.

Search head

The most important properties of the search head are its size, the relationship between the transmit and receive coils, and the shielding against capacitive effects between the coils and the ground. Surprisingly, the actual inductance of the coils is not of primary importance.

The greater the coil diameter the greater the penetration depth but the less sensitive the detector will be to small objects. Penetration using simple, circular coils is about equal to the search coil diameter for small objects such as coins, while sensitivity is roughly proportional to the cube of the object diameter (expressed as a function of the search coil diameter). Sensitivity is also inversely proportional to the sixth power of the distance between the coil and the object.

All this means that if the object size is halved the sensitivity is reduced to one-eighth. If the depth is doubled the sensitivity is reduced to one sixty-fourth. See why metal detectors designed to pick up small objects use small coils and really only skim the surface? If the search coil is doubled in diameter for greater penetration the sensitivity to small objects falls to one eighth, apart from the coil assembly becoming mechanically less rigid. The law of

diminishing returns again or 'you don't get something for nothing'.

Our new detector improves penetration while retaining sensitivity by using a co-planar arrangement of coils in the search head which gives a slightly magnified field pattern downwards, into the ground.

We mentioned earlier that the two coils are only loosely coupled. The positioning of the receiver coil in relation to the transmitter coil is very critical and is the major factor affecting the performance of the instrument. In fact, misplacement by a millimetre or so will markedly affect the performance.

As the search head is moved around, the changing capacitance between the coils and the ground could completely mask the minute changes in the field we are looking for. To avoid this affect the coils are enclosed in a Faraday shield.

By now it should be obvious that construction of the search head is not a task to be tackled on the kitchen table on a rainy Sunday afternoon. In fact, construction and alignment of the search head would be beyond most readers' resources (anyone who has attempted our earlier induction balance metal detector knows what it's like). With this in mind we chose to use the commercially built, 'pre-aligned' ►


ALL ELECTRONIC COMPONENTS

That's our name . . . that's our game!!!

MAJOR STOCKISTS OF ALL GENERAL RADIO AND ELECTRONIC COMPONENTS

JOIN THE GOLDRUSH

ETI 1500 KITSET

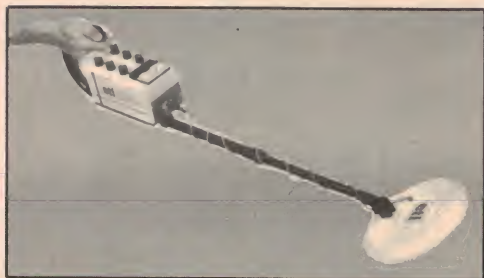

Superb unit featuring:

- Tune and discriminate.
- 4 modes of operation.
- VLF/TR design.
- Ground balance.
- Auto balance push buttons.
- Pre-wound search heads.
- Very professional unit.
- Approximately 1/3 price of many similar commercial built up locators.
- Audio and meter indication.

Lets you know when to rejoice.

PRICE: \$200.00 plus \$7.50 P&P

ETI 549 KITSET

Features include:

- Induction balance.
- Volume and level control.
- Phone jack.
- Dual sensitivity.
- Audio and meter indication.



PRICE: \$57.86* plus \$5.00 P&P

ETI 561 KITSET



Features include:

- B.F.O. principle.
- Crystal controlled.
- Good sensitivity.
- Simple construction.
- Low cost.

PRICE: \$33.00* plus \$5.00 P&P

EA PROSPECTOR KITSET

Features include:

- B.F.O. principle.
- Easy to build.
- Low cost.

PRICE: \$37.00* plus \$5.00 P&P



*Search heads not included.

E. D. & E. (SALES) PTY. LTD., NOW

ALL ELECTRONIC COMPONENTS

118 LONSDALE STREET, MELBOURNE, VIC. 3000. TEL: 662-3506.


Project 1500

search head made by Altek Instruments. This will be available in Australia through All Electronic Components in Melbourne who have agreed to make the unit available wholesale to other suppliers, as well as retailing parts themselves, along with hardware — the plastic extendable handle and the case for housing the electronics. See Shoparound for details, p. 85.

Construction

The mechanical components for this project — the search head, handle and case, are available through Altek's Australian agent, All Electronic Components, as mentioned earlier. We recommend you obtain these as your finished instrument will then be a professional looking piece of equipment, with the features and operation of a 'bought one' two to three times the price. However, you can suit yourself and make your own handle if you so desire and we have designed the pc board such that it will also fit in a large jiffy box. You will have to use the search head recommended though, for the reasons we have explained previously.

All the electronics mounts on a single, double-sided pc board. The Altek case has two clamps on the rear enabling it to be clipped on to the handle. The Altek

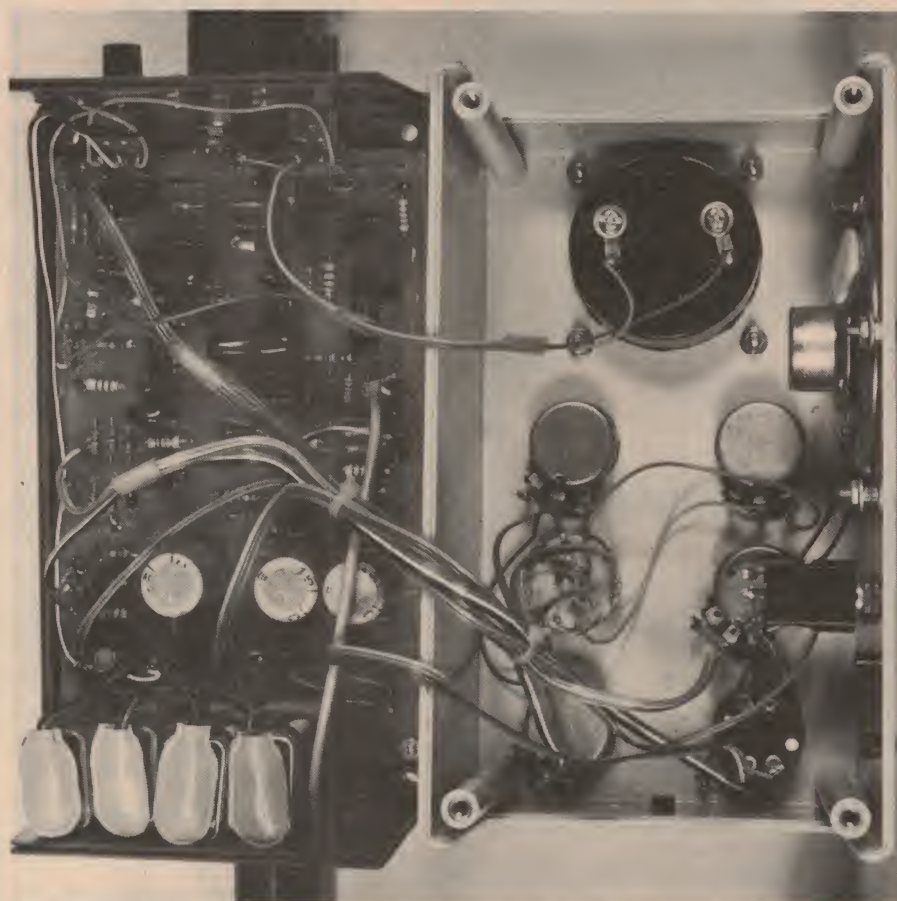

Inside the completed unit. Most of the wiring to the controls and other components external to the pc board as done using ribbon cable. The colour coding of this cable assists greatly in avoiding confusion. We suggest you place the two units as shown in this photograph to accomplish the wiring. Note how the speaker is mounted. The batteries are held in place by a strip of double-sided sticky tape.

handle has two sections, the lower section sliding inside the upper section enabling the operator to adjust the length of the handle to suit his height. Connection between the search head and the electronics is via a length of shielded cable (supplied with the head) and a five-pin DIN plug/socket arrangement. The *tune memory* pushbutton is mounted in the end of the 'crook' of the handle (see photographs) where it can be easily operated by the thumb. It connects to the electronics via a length of shielded cable passed through the handle.

Construction should commence with the pc board. As it is a double-sided board (i.e: copper tracks on each side), first identify the 'front' and 'rear' side. These are marked, respectively, ETI 1500f and ETI 1500r. The rear side has the more complicated pattern of tracks. The components are mounted on the *front* of the board, where there is the less complicated set of tracks. Note that some of the resistors, IC pins and pc board pins (used for connecting external wiring to the board) must be soldered to copper tracks on *each* side of the board.

Commence with the resistors. Take

care with those that cross tracks that you don't create a short circuit where it's not wanted. Next mount the capacitors. Take care with the orientation of the electrolytics. Note that capacitors C2, C7 and C11 are styroseal types, used for their good temperature stability. Be careful when soldering them in place that you don't overheat the leads as this can cause melting of the capacitor's case, possibly damaging it. The sample and hold capacitor, C13, must be a low leakage type, preferably polycarbonate or mylar. We used a greencap successfully, but whatever you manage to obtain, make sure it's a good quality type from a well-known supplier.

Now mount the semiconductors. Take care with the orientation of these as you can destroy devices if they are incorrectly inserted when power is applied. Finally, solder the pc pins in place and the four battery clips. The latter all go along one edge of the board.

Overall assembly of the pc board is clear from the overlay picture on page 45.

Once you have everything in place on the pc board and you're satisfied that all is OK, you can turn your attention to ►



A view of the front panel of the project. The Scotchcal front panel and meter escutcheon will be available from the usual suppliers. See Shoparound, p.85.

RADIO DESPATCH SERVICE

869 George Street,
Sydney, NSW. 2000.
(Near Harris Street)
Phone 211-0816, 211-0191.

We specialise in:

- PC Boards for ETI and EA projects.
- Scotchcal labels made under order for ETI and EA projects 1979 and onwards.
- "Kriket" model 3085. Hump Mount CB Speaker Unit. Special \$28.00.
- Small Ext. Speaker Sound Box. Model MS-03B 8 ohms 1 watt. special \$5.20.
- Microphone Model DM401 with lead and stand. Special \$4.00. Low Imp.
- Horn type ext. speaker. Model S-2010. 8 ohms, 5 watts. Special \$6.75.
- "Uni-Board". Universal PC Boards in sets of one, two and six.
- Car volt adaptor unit by Arlec. Model PS393.
- Logic Circuit Probes. Various types.
- Electrical fittings, power points, plugs, sockets, switches, lampholders etc.
- Cables and wires for projects, radio, television and general use.
- Fuses and fuse holders in 2AG and 3AG sizes.
- Oscilloscopes, test equipment, power supplies by Hitachi, Trio, Leader and Technico.
- Wide range of heatsinks. Thermalloy, Philips, Redpoint etc.

Texas Calculators

	excl. ST	incl. ST
Ti.59	\$265.00	\$299.00
Ti.58C	\$132.00	\$149.00
Ti PC 100C Printer	\$210.00	\$237.00
Ti.50	\$36.40	\$40.30
Ti.55	\$53.35	\$59.00
Ti.30 Student Pack....	\$20.00	\$22.10
Little Professor	\$17.40	\$19.00
Dataman	\$23.63	\$26.15
Speak and Spell	\$68.60	\$75.95

MAIL ORDER CUSTOMERS


\$1.00 packing plus 5 percent of order value up to \$80.00, thence a flat \$4.00 for postal items. Carrier — freight on.

OPEN: Mon-Fri 8 am to 5.30 pm.
Thursday night late shopping till
8.30 pm. Saturday 8 am to
11.45 am.

HEATSINK EXTRUSION

TYPE XA

CHASSIS & MOUNTING FEET
INTEGRATED IN HEATSINK
DESIGN.

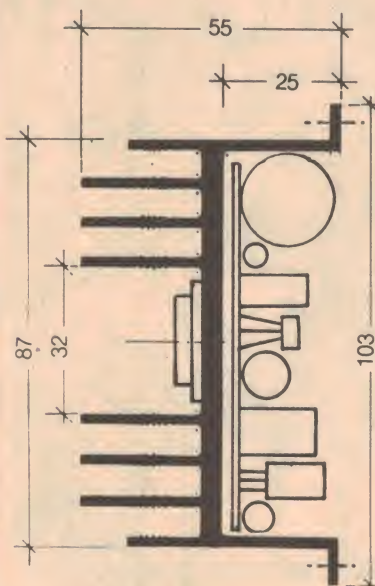

YOU DON'T HAVE TO DESIGN
OR BUY ANY OTHER METAL
WORK OR CHASSIS TO
HOUSE ASSOCIATED
CIRCUITRY & COMPONENTS.

YOU SAVE —

- ★ MONEY
- ★ TIME
- ★ SPACE
- ★ STOCK HANDLING

Designed & Manufactured
in Australia

WA ATKINS CARLYLE (09) 321-0101
SA PROTRONICS (08) 212-3111
NSW ELECTRONIC DISTRIBUTORS
(02) 636-6052
QLD CW ELECTRONICS (07) 48-6601
VIC STEWART ELECTRONICS
(03) 543-3733, ELLISTRONICS
(03) 602-3282, ALL ELECTRONIC
COMP. (03) 662-3506
ACT GEORGE BROWN & CO.
(062) 80-4355
TAS GEO. HARVEY ELECTRIC
(002) 34-2233

AUTOTRON AUSTRALIA
P.O. Box 202, Glen Waverley
3150 Victoria

NEW

RPG HI-FI & MUSICAL INSTRUMENT SPEAKERS

Manufactured to Radio Parts Group specifications by the world's largest speaker manufacturer.

HIGH EFFICIENCY TWEETERS

H66AP45-01F 6w	\$5.14
E66CP45-01F 8w	\$5.14
B45DP70-01F 10w	\$8.95



HI-FI MID RANGE

B11EC80-02F 30w	\$15.79
(can back) 4 1/2 inch	
A11DP60-02F 15w	\$7.37
(sealed back) 4 1/2 inch	

WIDE RANGE

4 1/2" B11EC80-01F 15w	\$13.49
6" A16DC61-01FW 12w	\$8.44
6" C16E70-01FW 15w	\$13.23
8" A20EP80-03FW 20w	\$15.04
8" A20EC70-03FW 30w	\$14.35



WOOFERS

8" A20EU75-01F 30w	\$15.29
10" A25EP65-02F 20w	\$15.41
10" C25FU90-03F 50w	\$31.47
12" A30EU80-01F 35w	\$29.44
12" A30FU20-01F 65w	\$42.09



MUSICAL INSTRUMENT

8" B20HP14-01F 50w	\$23.54
12" A30GC40-01F 100w	\$57.92



RPG Speakers are only available from:

**RADIO
PARTS
GROUP**

562 Spencer Street, West Melbourne.
Phone (03) 329-7888.
1103 Dandenong Road, East Malvern.
Phone (03) 211-8122.

Project 1500

the hardware. Start with the case that houses the electronics. If not pre-drilled, you'll need to mark out and drill all the holes in the case lid. The panel artwork can be used as a template. Note that we dressed up the case with a Scotchcal panel. These should be available through the usual suppliers. Centre punch holes before drilling. The cutout for the meter can be made with a hole saw or by drilling a series of 4 mm diameter holes just inside the marked edge of the hole. When you complete the circle, the centre piece can be snapped out and the edge of the hole cleaned up with a half-round file until the meter drops in neatly.

The speaker is mounted on the left hand side of the case lid (as you would normally view the unit in use). It is held in place by large washers placed under the nuts of three bolts spaced around the outer rim of the speaker. Alternatively, you can glue it in place. Be careful not to get any glue on the speaker cone or you might end up with a rather 'strangled' sound!

The pc board mounts in the bottom piece of the case, along with the DIN socket (for the search head connector) and two battery test push buttons. A small hole in the bottom passes the cable to the tune memory button. The case bottom has four integral moulded standoffs to provide support for the pc board which is held in place with screws.

Once all the mechanical work on the case is satisfactory, the Scotchcal panel may be stuck on. Take care when positioning it as it's almost impossible to move if you misalign it. Carefully smooth out all the bubbles toward the edge of the transfer.

The controls, meter etc. may be mounted next. Then you can wire all the external components to the pc board pins. We used lengths of ribbon cable where possible to simplify the wiring. The easiest way to accomplish this part of the assembly is to place the bottom of the box, with the pc board mounted in it, on your left and the lid, with the meter and controls etc. mounted, face down on your right. Follow the wiring diagram on page 44 and complete all the interconnections. You should now appreciate pc board pins!

The tune memory button mounts in a hole in the end of the 'crook' of the handle, as we explained earlier, and the shielded cable connecting to it passes through the handle, emerging through a small hole drilled in the handle near where the cable can enter the hole provided for it in the bottom of the box. This cable is best inserted before you mount

the pushbutton. Remove the handgrip. Push the cable through the hole in the handle near the case, until it appears through the end of the handle. Solder the end of the lead to the pushbutton and mount the pushbutton in the hole in the end of the hand grip (easier said than done!). Put the handgrip back and you can pass the business end of the cable into the case and terminate it. If you're lucky, kit suppliers may sell the units with this part already assembled.

Holding the batteries in place is generally left to your ingenuity. We used double-sided sticky tape (ah, that's useful stuff...). The battery life is quite good as the circuit has been designed for low current drain. Reverse polarity protection is provided on the pc board to avoid problems should you inadvertently connect a battery back to front.

When all wiring is complete, push the case onto the handle and drill a small hole through one of the clamps and the stem of the handle. Insert a nail or a bolt and this will prevent the case from rotating on the handle. Mount the search head and adjust the length of the stem to suit yourself. Wrap the cable from the search head around the stem so that it is held quite rigidly and plug it into the DIN socket on the case.

You're ready to roll! ... once you've tested it.

If you wish to make the search head completely waterproof, seal the hole through which the cable passes with Silastic rubber or some similar caulking compound.

Operation

When construction is complete and you're satisfied all is well, turn the detector on and advance the *volume* control. Set all other controls to mid-



A view of the forward end of the case showing the two battery test pushbuttons and the DIN plug and socket connection to the search head. The Altek cabinet is two-tone grey plastic. The upper section is a lighter hue. Note the "GT" stripes!

to page 158 ▶

Stake your claim and win a Compass gold detector.



In the 1850s there were no fancy gadgets to help a man strike it rich.

But in December *Outdoors* magazine you have the chance to win a gold detector. We've 'buried' gold in an old photograph of the diggings.

You have to pick where in the photograph it's 'buried', fill in the coupon and send it to *Outdoors*. The first correct entry opened will win a Compass Relic Magnum gold discriminator worth \$595. The second correct entry opened will win a Compass Magnum 420 gold discriminator worth \$465.

Who knows, if you're lucky enough to win the competition you might be lucky enough to strike it rich.

Australian
Outdoors
MW&O/OD1

MERRY XMAS TO ALL OUR READERS

NEW PRODUCTS

WELLER PRODUCTS TEMPERATURE CONTROLLED STATION WTCPN Series

Product Description: A transformer powered soldering station, complete with a low voltage, temperature controlled soldering pencil. The special Weller "closed loop" method of controlling maximum tip temperature is employed, thereby protecting temperature sensitive components while the grounded tip protects voltage and current sensitive components. The soldering pencil features a stainless steel heater construction, a non-burning silicon rubber cord and a large selection of iron plated tips in sizes from .8mm diameter to 6mm diameter with a choice of tip temperature of 600 degrees F/315 degrees C, and 800 degrees F/430 degrees C.

A redesigned transformer case features an impact resistant noryl for durability and protection against accidental damage, a quick connect/disconnect plug for the soldering iron, extra large wiping sponge, tip tray to store extra tips, plus an improved off-on switch with a long-life neon indicator light, a non-heat sinking soldering pencil holder, and a 2m flexible 3-wire power cord. The soldering iron is normally provided with a PTA-7 -1.6mm screwdriver 700 degrees F/370 degrees C tip.

SPECIFICATION

POWER UNIT


o Power Input 240 volts 50Hz 60 Watts Int. o Transformer Output voltage — 24 volts (full load) o Power Unit size — 113mm x 187.3mm x 92mm. o 2 metres, 3 wire power cord.

SOLDERING PENCIL

o Soldering pencil wattage — 48 watts o Tip voltage to ground .01 volts P-P o Pencil weight — 50 gram (W/O cord) o Recovery time (from 100 degrees F drop) W/PTA7 tip equals 11 sec.

Special Price Xmas only \$54.30

Please note we are now distributors for all Weller quality products.

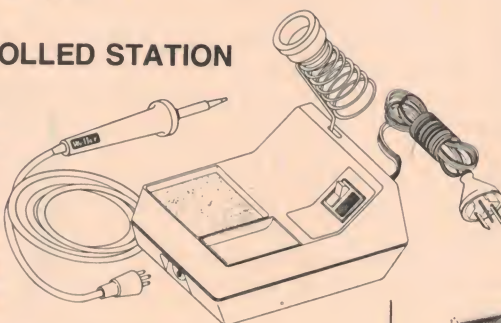

RISTON PRE-COATED PRINTED CIRCUIT BOARD

Available ex stock in handy sizes. Write for information and prices. Single and double sided available. Tax exempt prices available through Ritronics Wholesale (03) 489-7099.

CLARE ASCII ENCODED KEYBOARDS

SPECIAL \$165.00 inc. tax

Model C70/MGP microprocessor controlled.

AT LAST A FULLY
BUILT POWERFUL
COMPUTER FOR THE
SERIOUS PROGRAMMER
**Australia's first
under \$300 COMPUTER...**

\$295
INCL. ZX80 BASIC
MANUAL



COMPONENT

2716's.....
2708's.....
2114's (450ns)
2114's (300ns)

KITS



ETI SERIES 4000 60W STEREO AMP KIT

Complete Kit Rack Mounting

Case	\$199.00
Woodgrain Sided Case	\$189.00
Parts Available Separately	
Front Panel	\$10.90
Rack Mounting Case	\$55.00
Wooden Sided Case	\$49.00

ETI 471 Preamp kit of parts	\$10.90
ETI 472 PS kit of parts (without transformer)	\$24.00
ETI 470 60 Watt kit of parts (without heatsink)	\$23.00
ETI 480 50W kit of parts	\$17.50
ETI 480 100W kit of parts	\$22.50
ETI 084 Car Alarm kit.....	\$11.50
EA TV CRO Adaptor kit	\$29.00
EA 300W Power Amp Module	\$63.50
ETI 466 300W Power Amp Module	\$63.50
EA Digital Capacitance Meter Kit (EA March 1980)	\$52.99
Autochime kit	\$29.75
MK3 Drill Speed Control.....	\$13.50
Capacitor Discharge Ignition	\$32.50
Musicolor MK3 kit	\$69.50
Disco Strobe kit	\$34.50
Leds and Ladders (EA August).....	\$15.75
ETI 149 Two-Tone Generator	\$34.90
ETI 563 Nicad Fast Charger	\$54.90
Dream 6802 kit	\$109.00
Power Supply to Suit.....	\$29.50
Hex Keypad	\$24.90
ETI 569 Sound or Light Operated Flash Trigger	\$25.90
ETI 147 Electronic Dummy Load kit	\$99.00
Series 3000 'Mini' Stereo Amp kit	\$79.90
ETI 561 Metal Detector kit	\$32.50
Playmaster 40 plus 40 Amp kit	\$129.00
Playmaster AM/FM tuner kit.....	\$129.00
Playmaster Graphic Equaliser.....	\$99.50

425 HIGH STREET, NORTHCOTE 3070. MELBOURNE. PH (03) 489-8131.
RITRONICS WHOLESALE PH (03) 489-7099, MAIL ORDERS PH (03) 481-1436.

ROD IRVING ELECTRONICS

425 HIGH STREET, NORTHCOTE 3070. MELBOURNE. PH (03) 489-8131

SPECIALS

.....	\$13.50
.....	\$7.50
.....	\$3.90
.....	\$4.50

KITS

Playmaster Graphic Analyser kit.....	\$99.50
EA 79SF9 Sound Flash Trigger.....	\$15.00
ETI 585R Ultra Sonic RX.....	\$15.95
ETI 585T Ultra Sonic TX.....	\$8.95
ETI 576 Electromyogram kit.....	\$89.00



ETI 147 Oct '80 Electronic Load kit parts.....	\$75.00
ETI 327 Turn Hazard Unit kit parts.....	\$22.00



EA Digital Engine Analyser Oct 80 80TM8a/10 Kit parts inc. front panel.....	\$44.95
--	---------



EA Car Battery Voltage Monitor Oct EA kit parts.....	\$6.50
EA Bipolar Train Controller Nov 80 kit parts.....	\$26.00
EA Digital Storage CRO Adaptor Nov 80 kit parts.....	\$78.00
EA Light Beam Relay Nov 80 kit of parts.....	\$13.00
EA RS232 Printer Interface Nov 80 kit parts.....	\$15.00

SPECIALS

TRIO CRO'S NOW IN STOCK


130 mm DUAL-TRACE (write for full product range and price list)
15 MHz, TRIGGERED SWEEP OSCILLOSCOPE

\$555.00 plus tax.



TRIO

- Simplified circuitry improved performance and dependability have been successfully realized with the use of ICs throughout
- A vertical amplifier provides as wide a bandwidth as DC to 15 MHz, as high a sensitivity as 10 mV/div, and a low input capacitance
- A sweep rate extends from 0.5 μ sec/div to 0.5 sec/div in 19 ranges. Further, TV vertical and horizontal syncs are available for measuring video signals and, with its x5 magnified sweep, its range of application is extremely wide
- Very easy X-Y operation of high input sensitivity for Lissajous measurements
- Dimensions: 260(W) x 190(H) x 385(D) mm, Weight: 8.4 kg

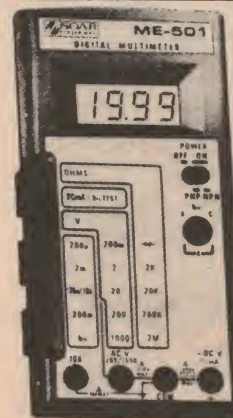

Soar Model 501A

4 digit LARGE LCD DISPLAY

Send for
specs.

\$79.00

Add \$3 P&P
and certified
mail.

INTERSIL LCD 3½-DIGIT PANEL METER KITS. INTERSIL ICL7106 \$34.50

Build a working DPM in ½ hour with these complete evaluation kits. Test these new parts for yourself with Intersil's low-cost prototyping kits, complete with A/D converter and LCD display (for the 7106) or LED display (for the 7107). Kits provide all materials including PC board, for a functioning panel meter. ICL7106EV(LCD).

SUPER SPECIAL COMPUTER COOLING FANS 4 INCH


\$19.50



For heavier items add additional postage. Extra heavy items sent Comet freight on. Prices subject to change without notice. Send 60c and SAE for free catalogues. Minimum pack and post \$1.00. Bankcard Mail Orders welcome.

Thermatic fan controller for a vehicle

Mike Collins

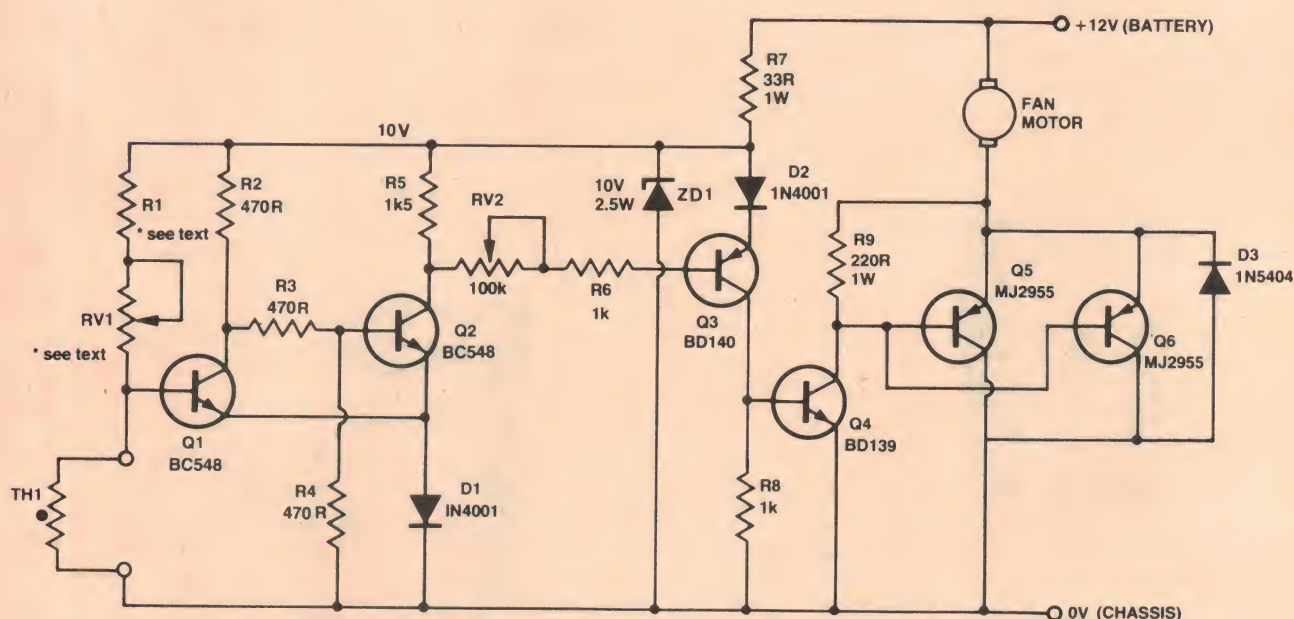

RECENTLY I decided to install a thermatic fan to my car but was dismayed to find that the price was around \$80.

This discovery sent me off to the local wreckers where I was able to purchase a fan for \$15. Unfortunately, the temperature control for this fan was unsuitable as it was fixed at the wrong temperature and was not adjustable.

I began putting together a few circuits to switch the fan on when the engine reached the desired temperature. Apart from turning the fan on at the right temperature, the circuit would have to turn it off once a predetermined lower temperature had been reached so that the engine would be maintained within its normal operating temperature range. A few circuits I tried had a

tendency to 'hang on' past this lower temperature which was definitely an undesirable situation. I eventually solved this problem by using the circuit shown here.

Circuit operation

Engine temperature is sensed by a thermistor, TH1, mounted at a convenient point on the engine block. This thermistor controls a Schmitt trigger (Q1 and Q2) which drives several power transistors (Q5 and Q6), connected in series with the fan motor, via two intermediate stages (Q3 and Q4).

So that the operating points of the Schmitt trigger remain stable despite supply voltage variations (as much as 30% in 12 V systems) the collector

supply to Q1 and Q2 is stabilised at 10 V by zener diode ZD1. This also ensures supply line spikes do not cause spurious operation of the fan.

Potentiometer RV1 sets the switch-on temperature while RV2 sets the switch-off temperature.

When the engine is below the required temperature the voltage drop across TH1 should be above 1.2 V. Thus, Q1 will be on and Q2 will be off. As no collector current flows in Q2, Q3 and Q4

SHORT CIRCUITS is a feature that lies somewhere between Ideas for Experimenters and complete Projects. Generally, the items published in Short Circuits will involve tried circuits that have not necessarily been fully developed, but fairly complete details are included as a guide to readers. Unfortunately, owing to the nature of these items, we cannot give further details other than what is provided in the article. Contributions for Short Circuits are always welcome.

will be off and no base drive will be applied to Q5/Q6. Thus, the latter transistors do not conduct and the fan will be idle.

When the engine reaches the required temperature, the voltage drop across TH1 will fall below 1.2 V (preset using RV1) and Q1 will turn off. Q2 then turns on and base current will be supplied to Q3 via D1, Q2, RV2 and R6, turning Q3 on. This turns Q4 on which applies base drive to Q5 and Q6, turning them hard on, operating the fan.

Diode D3 prevents back-emf spikes from destroying the two MJ2955s when the unit turns them off.

There will be a certain amount of hysteresis in the operation of the Schmitt trigger. However, the collector current in Q2 will vary as Q1 will turn on gradually when the temperature drops below the preset switch-on temperature. Thus the base current to Q4 will vary. The point at which insufficient current is supplied to Q3 can be set by varying RV2.

Construction

The whole unit was constructed in a die-cast aluminium box which was bolted to the vehicle chassis inside the engine compartment. The MJ2955s were mounted directly on the case, no insulation is required as the collectors are connected to 0V in any case. General construction is non-critical. However, I used a pc board and supported it by soldering the common connection copper area to the backs of the pots which were mounted on the box.

The thermistor I used had a resistance of 34 ohms at 77°C (170°F). In general, R1 and RV1 are selected such that the voltage across the thermistor TH1 is 1.2 V when the engine is at its recommended operating temperature (or in the middle of its operating temperature range). Whatever thermistor you use, you will need to know its resistance at that temperature. Knowing this, you can calculate R1 and RV1 as follows:

$$R1 = 4 \times R_{TH1} \text{ (at operating temp.)}$$

$$RV1 = 6 \times R_{TH1} \text{ (at operating temp.)}$$

Having calculated these values, use the component nearest in value above that calculated. The correct setting of switch-on temperature should be within the range of RV1. Values used in my unit were, R1 = 150R, RV1 = 250R.

You will need an engine temperature meter of some sort to set the on and off points correctly.

All resistors should be of the rating specified. Those used around Q1 and Q2 (R1 to R5) may be ¼-watt types, but ½-watt or higher rated types may be more reliable. I did not find it necessary to use low value emitter resistors on the MJ2955s to assist current sharing (though it may be a good idea to match a pair for Vbe...Ed.). The current through the fan motor when connected directly across the battery was 8.6 amps. In this circuit it draws 7.7 amps but the loss did not noticeably affect the cooling. ●

MELBOURNE'S BEST VALUE IN COMPONENTS

74LS		74LS95.....1.00	74LS373.....2.40	7441.....2.50	74153.....1.40	78P05.....8.00	SELECTED ITEMS
74LS00.....33	74LS107.....65	74LS109.....50	7400TTL	7442.....80	74154.....1.40	78L05.....40	
74LS01.....30	74LS113.....50	74LS114.....75	7400.....25	7447.....1.10	74157.....1.40	78L09.....40	
74LS02.....30	74LS114.....75	74LS123.....1.50	7401.....25	7448.....1.10	74160.....1.70	78L12.....40	
74LS04.....40	74LS123.....1.50	74LS125.....70	7402.....25	7450.....30	74165.....1.70	78L15.....40	
74LS05.....50	74LS125.....70	74LS133.....30	7403.....25	7451.....30	74172.....1.40	78L18.....40	
74LS08.....30	74LS133.....30	74LS138.....1.10	7404.....25	7453.....30	74173.....2.60	78L24.....40	
74LS09.....30	74LS138.....1.10	74LS151.....1.00	7405.....30	7454.....30	74175.....1.20	78CB.....2.40	
74LS10.....30	74LS151.....1.00	74LS155.....60	7406.....60	7460.....30	74180.....1.50	7905.....1.60	
74LS11.....55	74LS155.....60	74LS157.....75	7407.....45	7470.....50	74192.....1.80	7905K.....2.95	
74LS12.....30	74LS157.....75	74LS160.....70	7408.....25	7472.....55	74193.....1.80	7906.....1.60	
74LS14.....80	74LS160.....70	74LS163.....80	7409.....25	7473.....55	74176.....1.50	7908.....1.60	
74LS15.....75	74LS163.....80	74LS164.....1.40	7410.....25	7474.....35	74367.....80	7912.....1.85	
74LS16.....60	74LS164.....1.40	74LS165.....1.40	7412.....40	7475.....45		7912K.....2.95	
74LS20.....30	74LS165.....1.40	74LS169.....1.90	7413.....55	7476.....40	74S	7915.....1.60	
74LS21.....35	74LS169.....1.90	74LS174.....65	7414.....60	7480.....1.00	74S02.....75	7918.....1.90	
74LS27.....30	74LS174.....65	74LS175.....90	7416.....60	7483.....1.40	74S74.....1.40	7924.....1.60	
74LS28.....35	74LS175.....90	74LS190.....1.60	7417.....65	7485.....1.40	VOLT. REG.	79HG.....10.80	
74LS30.....30	74LS190.....1.60	74LS191.....1.30	7418.....55	7486.....55	309K.....1.90	79L03.....80	
74LS32.....30	74LS191.....1.30	74LS192.....1.15	7420.....25	7489.....2.90	317T.....2.90	79L05.....80	
74LS37.....40	74LS192.....1.15	74LS193.....1.00	7421.....30	7490.....40	317K.....2.90	79L12.....80	
74LS38.....40	74LS193.....1.00	74LS194.....1.20	7422.....35	7491.....1.00	323K.....8.95	79L15.....95	
74LS40.....30	74LS194.....1.20	74LS195.....1.00	7425.....60	7492.....80	723-14.....55	79L18.....80	
74LS42.....45	74LS195.....1.00	74LS196.....1.60	7426.....40	7493.....50	723can.....95	79L24.....80	
74LS47.....1.20	74LS196.....1.60	74LS197.....1.60	7427.....40	7494.....1.15	7805.....1.00	78MGT.....1.80	
74LS73.....60	74LS197.....1.60	74LS221.....1.50	7430.....30	7495.....1.00	7805K.....2.10	79MGT.....1.80	
74LS74.....40	74LS221.....1.50	74LS247.....1.95	7432.....30	7496.....1.10		DVM CHIP	
74LS75.....50	74LS247.....1.95	74LS251.....85	7437.....40	74100.....2.00	7812.....1.00	74C925.....13.50	
74LS78.....65	74LS251.....85	74LS253.....85	7438.....40	74107.....70	7812K.....2.40		
74LS85.....1.40	74LS253.....85	74LS257.....75	7439.....50	74121.....70	7815.....1.00		
74LS86.....60	74LS257.....75	74LS259.....3.30	7440.....30	74123.....85	7818.....1.00		
74LS90.....60	74LS259.....3.30	74LS279.....95	7441.....30	74132.....1.30	7824.....1.00		
74LS92.....1.00	74LS279.....95	74LS290.....1.30	7442.....30	74145.....1.50	78H05.....9.20		
74LS93.....85	74LS290.....1.30		7443.....80	74150.....1.50	78H12.....7.50		
			7444.....90	74151.....1.40	78HG.....7.95		
			7445.....65				

Mail Orders, \$1.00
Min. P & P Please.

Mail Orders, \$1.00
Min. P&P Please.

TASMAN ELECTRONICS

12 Victoria Street, Coburg, VIC, 3058.
Phone (03) 354-5062.

TRANSFORMERS for MICROPROCESSORS



PF4405
9 Volts @ 10 Amps
Two Windings each
15 Volts @ 1 Amp

PF4354
9 Volts @ 10 Amps
9 Volts @ 1 Amp
Two Windings each
15 Volts @ 1 Amp

PL158/15VA
8 Volts @ 500mA
Two Windings each
14 Volts @ 400mA

PL30-9/40VA
9 Volts @ 3 Amps
Two Windings each
15 Volts @ 500mA

PL30-9/60VA
9 Volts @ 5 Amps
Two Windings each
15 Volts @ 550mA



PL161/5VA
8 Volts @ 200mA
12V-0-12V @ 150mA
*Designed to suit standard PCB grid
— pins centred at 0.1 inch.*



SEND FOR A DATA SHEET

FERGUSON TRANSFORMERS PTY LTD
331 High Street
CHATSWOOD, NSW. 2067
Tel: (02) 407-0261
Melbourne: (03) 329-6415

FERGUSON

SEVLEEN

LIGHTING PTY. LTD.

MANUFACTURERS OF LIGHTING CONTROL SYSTEMS
Office: 4 Weldon St., Burwood. 2134 N.S.W.
Tel. (02) 74 8905

HERE NOW! Saturn 4 Chasers & Snakelights....

The most portable, economical and adaptable low priced lighting system ever invented, a must for clubs, displays, windows and dance venues.

Connected to the "STARCHASER" controller, an amazing sequence is produced all within a tube.

Up to 300 metres of scintillating, pulsating chase.

No complicated connections, bend it, shape it, take it anywhere, anytime. (Each snakelight is 10 metres long). 12 different colours available.

**The price will amaze you.
Find out more - now!**

DISTRIBUTOR AND TRADE ENQUIRIES WELCOME





CHRISTMAS MONEY SAVERS

NEW CLIP-IN PHONE DIALERS

Install in mins!
Only 3 wires to connect!
Specially designed to replace Aust. rotary dials.
Not approved by Telecom under current reg.

\$29.99 Now **\$10**



MAL'S GOODIES

2w+2w Stereo AMP 2xLM380 \$4.50
Philips TRIPLERS PMA 641-444 for \$10.00
500-Asst. 1W RESISTORS \$2
1KW CB/HAM TVI FILTER \$15
New, were \$25.00, easily fitted.

DE-SOLDER BRAD 1 metre pack \$1.75
INTERCOMS, 2 WAY only \$12
6-PCB OFFCUTS in gold condition \$2
240v Light Flasher Electronic \$4
20-Asst MINI-POTS All new, good \$2
AM Tuner Kit All parts incl instructions \$5
100,000uf 16vW ELECTRO \$12
Stereo Ceramic Cartridge GP \$2.50
Most common replacement similar, C4, 5C-500

20 COMPUTER BOARDS IBM \$2
Lots of diodes, transistors, resistors, capacitors
1-2v Ni-Cad 500mAh \$1.75
Pencell Batt. RECHARGEABLE 10+ \$1.50 ea
FM Wireless Mike 88-108 MHz \$11
240v to 110v Transformer 2Acamp \$19
Tele-259 Co-ax PLUG Type 10 for \$3.50
100 asst TAGSTRIPS all lengths \$2.50
20 asst. POTS SWITCHED, ETC only \$2
200 asst. 1W Resistors Good \$2
90 asst. Electrolytic Caps \$2
6 Metres 3 Core MAINS LEAD \$2
3-8" Ferrite Rods for antenna \$1.20
AY3-8500 TV Games IC chip \$3
8" Ceiling Spkr. Grilles GROUND MUSIC \$2
5W SPEAKERS to suit above \$7
5W Line Transformer to suit 70v line \$3
10W Line Transformer to suit 70v line \$4

AUDIO MIXERS



WITHOUT MIC \$74
WITH MIC \$89
2 Hi-Fi microphone inputs
2 Magnetic/Ceramic phono inputs
2 VU meters, 5 stereo or mono
CUEs \$89
Independent CUE on each chan.
Compact size, 26x20x5 cms.
9V Battery operation, CAT-DC input socket.

the PRO model

WITH 5 BAND GRAPHIC EQUALIZER New Only



\$179 was \$199
Save \$20
AC STEREO
MIXER WITH EQUALIZER
Facilities for 4 stereo program input and 2 mic. inputs
Built in low noise preamplifier for magnetic phono and low or high impedance microphones
Professional stereo slide controls
Headphone circuits to monitor each input and output
Talk switch to attenuate music volume 14dB so mic's can be used without requiring music levels
5 channel stereo graphic equalizer section using separate slider controls
Meters monitor the output of left and right channels independently

MAL'S No 2 BONANZA

A VAST ASSORTMENT OF GOODIES FOR ASPIRING HOBBYISTS- All new pak!

1ST TIME OFFERED!
All new all high quality parts, end-of-line, useful components, samples and specials, including semiconductors and IC's, pots, resistors, capacitors, Transformers, relays, switches, coils etc. etc. etc. WORTH \$3.50
OVER 2Kg WEIGHT, SIZE 11x7x6 approx

\$14.99

BATTERY CHARGER

WITH METER
12v 4AMP \$29.90
ALSO TRICKLE-CHARGER
12v 0.5AMP \$11.50

SAVE \$3

WITHOUT METER

25W 8 Ohm 3WAY SPEAKER KIT SALE!

WALNUT finish, ready-made baffle, black speaker cloth, 8 WOOFER+5 MID-RANGE+3 TWEETER + X'OVERS + wire and Inner bond + screws!

Can be finished in 2 hours!
Great sound!
55Hz-18KHz
18KHz rep.

\$69

ASSEMBLED & TESTED \$109

Speakers Separately: 8" Woofer \$7.50 ea
5" Mid-range 500Hz-12KHz \$5.95 ea
3" Tweeter 5KHz-18KHz \$4.50 ea

MICKEY MOUSE BOYS OR GIRLS DIGITAL WATCHES

100% DIGITAL WATCHES
FULLY GUARANTEED 6 MTHS

\$29.99 Sorry, MENS only available

LOW COST LCD WATCHES
HOURS, MINS, SECS, DATE, BACK LIGHT.
Ideal Xmas Gift!

Also Ladies HI-FASHION model \$19.50
and UNI-SEX fashion model \$19.50

MINI-FANS

5" 240v \$18
130x130x40mm
3" 110v \$15
82x82x40mm
Ex-Computer-GTEED

AS NEW

Christmas specials

LUCKY-DIP CRAB-BAG!

Hobbyists assortment incl plugs, jacks, sockets, knobs, fuses, pots, electros, switches etc.
Semicomductors 1st!
Worth at least \$20
OVER 100 PARTS \$10

ASSORTED PARTS

XENON FLASH TUBE

only \$2.50
or 10+ \$2.10 ea
TRIG. TRANS 90% 10% 75%

DE-LUXE METAL CABINETS

Aluminium base, 18g. Steel cover, TWO-TONE, also louvered with rubber feet.
L102 102x102x102 \$2.75
L150 150x150x150 \$4.35
L184 184x184x184 \$5.45
L200 200x200x200 \$6.95
BUY 10+, LESS 10%.

REED SWITCH 45c and COIL 80c

430 ohm 6v-15v

MINI PCB RELAY

8v-15v 250mA 10+ \$1.50
SPDT 2Acamp 10+ \$1.30

TV CIRCUIT BOARDS

Over 80 parts incl. 8 trans.
(ZSC1014, ZSC711, ZSA673, ZSA672, ZSC620), 10 diodes, caps, res, trimers etc. etc.
10+ \$1.00 ea 80c

CHEAP SEMICONDUCTORS

IN4004	400v 1A rect.	10c	9c	10c	10c
IN4007	1Kv 1A rect.	15c	13c	12c	12c
IN5404	400v 3A rect.	30c	25c	20c	20c
IN5408	1Kv 3A rect.	40c	32c	25c	25c
IN914/IN4148	diode	10c	9c	6c	6c
RED LED	Small 5mm	20c	16c	12c	12c
RED LED	Std. 5mm	15c	12c	10c	10c
GREEN LED	Std 5mm	25c	20c	16c	16c
ORANGE LED	Std 5mm	35c	30c	25c	25c
LM380	2 watt IC	\$1.50	\$1.50	\$1.20	\$1.20

LM340T-12 \$1.00 ea
(7812) 12v IA REG. 10+ \$9.00

NE 555 \$1.00 ea
10+ \$0.90 ea

DUAL TIMER LIMITED QTY. AVAIL.
BFX38 TIC44 40v-6A 500mA 35c
UHF 40v-6A 500mA 25c
W709 LINEAR OP-AMP 25c
AY6103 AUDIO OUT 90c PR.

INCREDIBLE VALUE!

until sold out

BD438 400v 45v 30c
45v 4AMP
BD139/140 \$1.40
PAIR

25A 250V SCR \$1.95 ea
10+ \$1.75 ea

2N3643 2SD 350 1500mA, 2A, 2W 8c
NPV 30v-5A 250MHz G.P. Amp/W. 8c

BC157 40v, 700mA Hfe 50-250 100MHz, 2-8W 28c each
BC158 40v, 700mA Hfe 50-250 100MHz, 2-8W 28c each
BC159 40v, 700mA Hfe 50-250 100MHz, 2-8W 28c each

2N3053 G.P. Switch 40v, 700mA Hfe 50-250 100MHz, 2-8W 28c each

309K 5v 1.5A MOTOROLA 10+ \$17.50+ \$75

SOLDERING IRON

240v 15w... models avail.
FAMOUS MAKE! \$11.99
...or 30w

RESISTORS

1/4 or 1/2 WATT \$1.50 PER 100 SAME VALUE
Full range avail. - new shipment arrived.

NEW DE-LUXE SOLDERING IRON STAND

Usually \$5.95 SAVE 96c \$4.99

2SD 350 1500mA, 2A, 2W \$3.90
BU 126 300v, 3A, 30W \$2.20
2N3055 20V Vce Hfe 15 675MHz 80c ea 75c

UHF AMP BF180 20c

2N3053 G.P. Switch 40v, 700mA Hfe 50-250 100MHz, 2-8W 28c each

309K 5v 1.5A MOTOROLA 10+ \$17.50+ \$75

TRANSFORMERS

Model... SAVE \$\$\$
M-2851 6-3v-0-6-3v 150mA \$2.90
M-2155 0-6-3, 7-5, 8-5, 9-5, 12-6, 15v 1A \$5
M-6672 0-15, 17-5, 20, 24, 27-5, 30v 1A \$7

GREENCAP CAPACITORS

0-001 to 0-01uF. 10% \$3.95
0-022 to 0-047uF. 12% \$3.95
0-056 to 0-1uF. 16% \$2.25 \$4.75 \$4.40

PACK of 100 asst. (lucky-dip)... \$5.90

PCB ETCHING KIT


Includes Dala pen, 250ml ferric chloride, 3 PCB's, etch tank, instructions etc. \$4.99

WANTED TO BUY... AMATEUR, CB EQUIPMENT.
MicroComputers
MULTIMETERS, OSCILLOSCOPES, TEST INSTRUMENTS.

Between Leichardt & Ashfield
6Kms CITY
PARRAMATTA RD
ST
Lewisham
PRE-PAK electronics
P.O. Box 43, CROYDON 2132
1a West St. Lewisham, N.S.W.
Ph: 569-9797 POST 10% ORDER VALUE
Phone or MAIL ORDER BY bankcard

MERRY XMAS TO ALL


Just starting out?

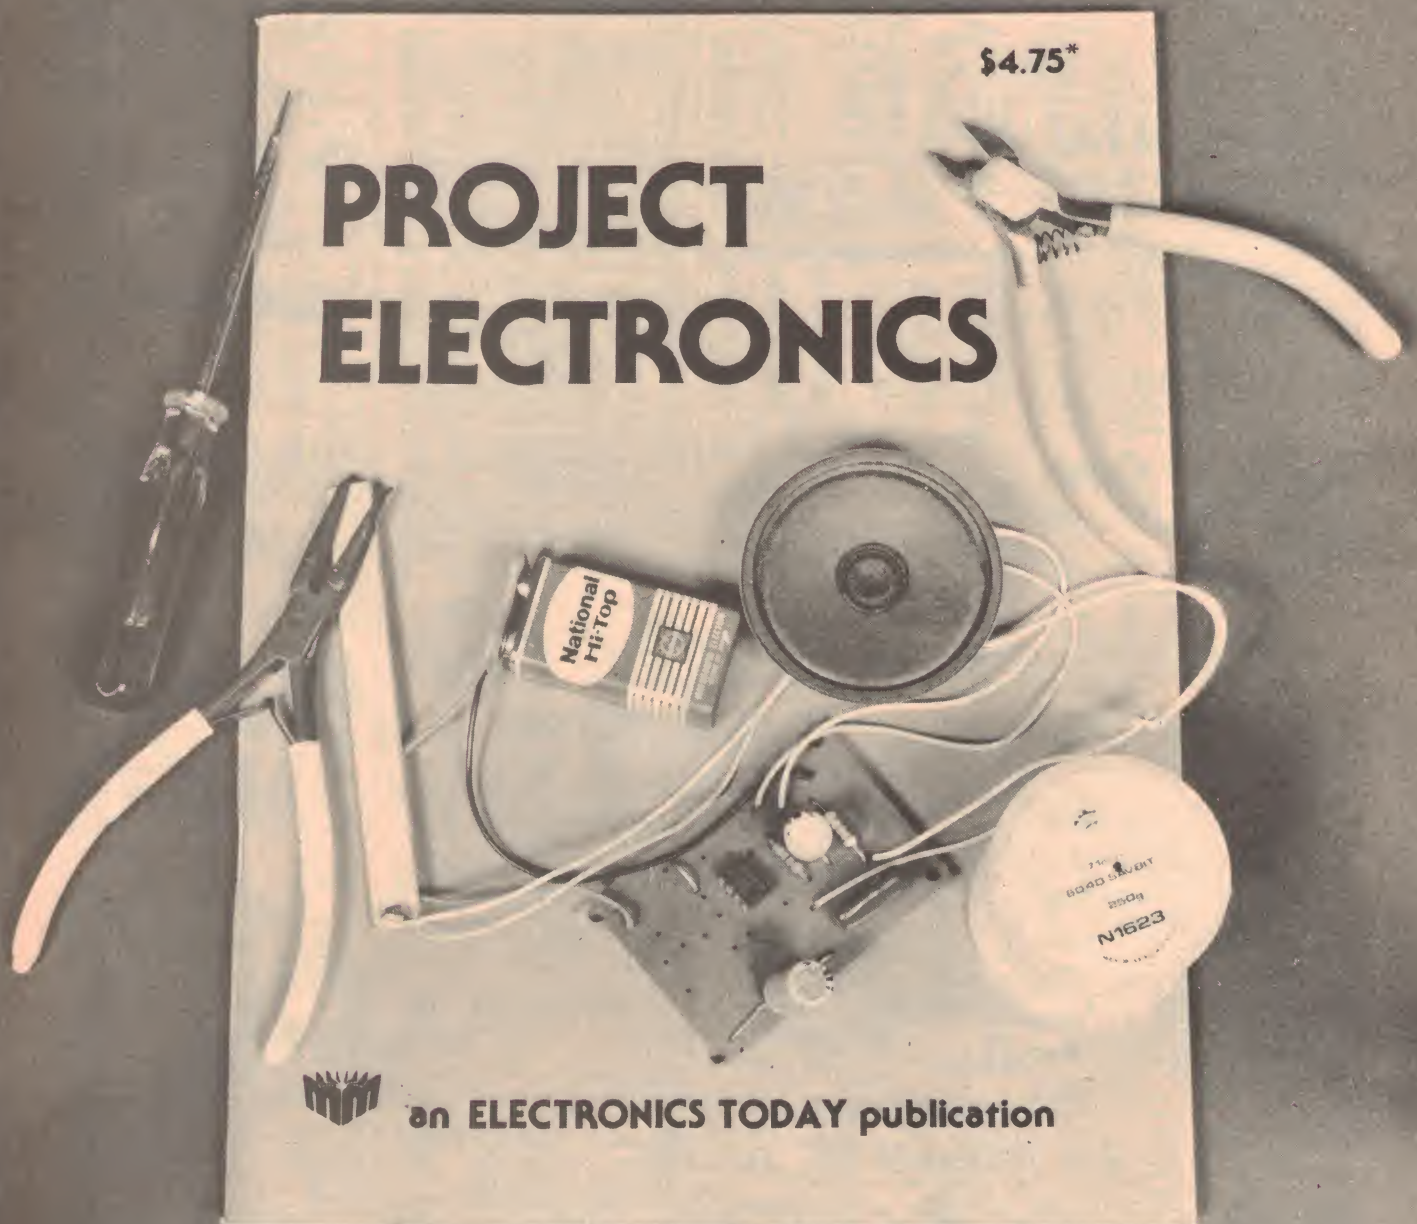

THIS BOOK has been specially designed and produced to meet the needs of newcomers to electronics. Students following the three-segment Industrial Arts syllabus at high school or embarking on the Electronics & Communications or a similar certificate course, will find the projects in this book an eminently practical introduction to the 'works' in electronics. Project Electronics has been a runaway success since it was first published. There are 26 projects included, many are readily available as inexpensive kits, and the book also provides advice on tools, identifying components, troubleshooting, how to solder etc. Available from specialist electronic suppliers or direct from the ETI Subscription Department, 3rd Floor, 15 Boundary St, Rushcutters Bay NSW 2011 for \$4.75 plus 45 cents post and packing.

Emergency lighting unit

If the mains power fails, you needn't be left completely in the dark. This unit automatically switches on a battery operated lamp as soon as the power goes off and keeps the battery always fully charged and ready for action.

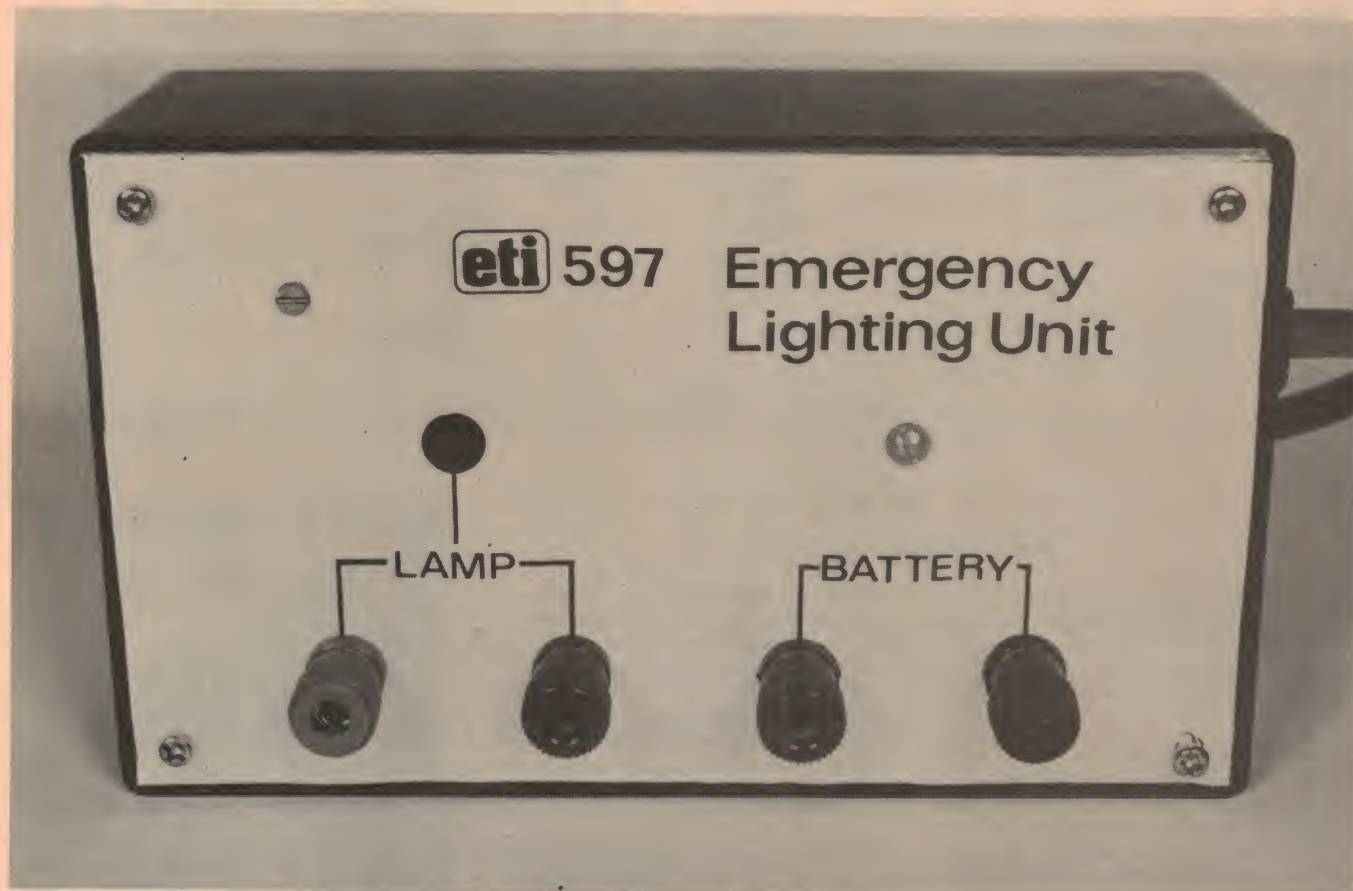

IF YOU LIVE in an isolated country area where the mains supply is erratic, or if your local electricity authority is not too good at labour relations and its workers are always going on strike, then you'll know what it's like to be suddenly and completely without any electric power.

Being deprived of the TV and hi-fi for a while could well be good for the imagination and improve your conversational skills no end, but trying to find the toothpaste in a pitch black bathroom is simply infuriating!

In these circumstances, even a low intensity light is infinitely better than

none at all. With this in mind we've designed this project, which switches on a 12 volt lamp of up to 24 watts as soon as the mains power fails. It could also be used of course to power any other 12 volt appliance with the same power rating.

The emergency lamp runs on current supplied by a 12 volt battery, which is kept fully charged when not in use by a trickle of current from the mains. We used a NiCad battery for our prototype, but there is no reason why you shouldn't use a lead/acid accumulator instead, because the charging current is kept so low there is no risk of overcharging and damaging the cells. The charging cur-

rent is determined by a current limiting resistor, which must be chosen to suit the capacity and charge characteristics of the battery you are using. On page 58 is a table which lists the necessary values of this resistor for different batteries.

We've also included a red LED on the front panel of the unit, to show when it is operating (i.e. when the battery is discharging). This may seem superfluous, because after all you can see for yourself whether a lamp is lit or not, but if you are using the unit to run a fish tank heater or suchlike, then an indication that the unit is operating will be reassuring. ►

Project 597

PARTS LIST — ETI 597

Resistors

R1	1k, ½W, 5%
R2	100R, ½W, 5%
R3	Current limiting resistor, see table
R4	1k, ½W, 5%

Capacitor


C1	100μ electrolytic, 25V
----	------------------------

Semiconductors

D1, D2	EM401, 1N4001, A14A or similar silicon diode
D3	0A91, 0A95 or similar germanium diode
LED1	TIL220R or similar red LED
SCR1	C106Y or similar

Miscellaneous


Ferguson PL24/20VA or similar transformer with 240V primary and 12V secondary rated at 1.5A; 12V NiCad battery; plastic box to suit (155mm x 95mm x 50mm); four screw terminals, two red, two black; 12V light bulb and socket.

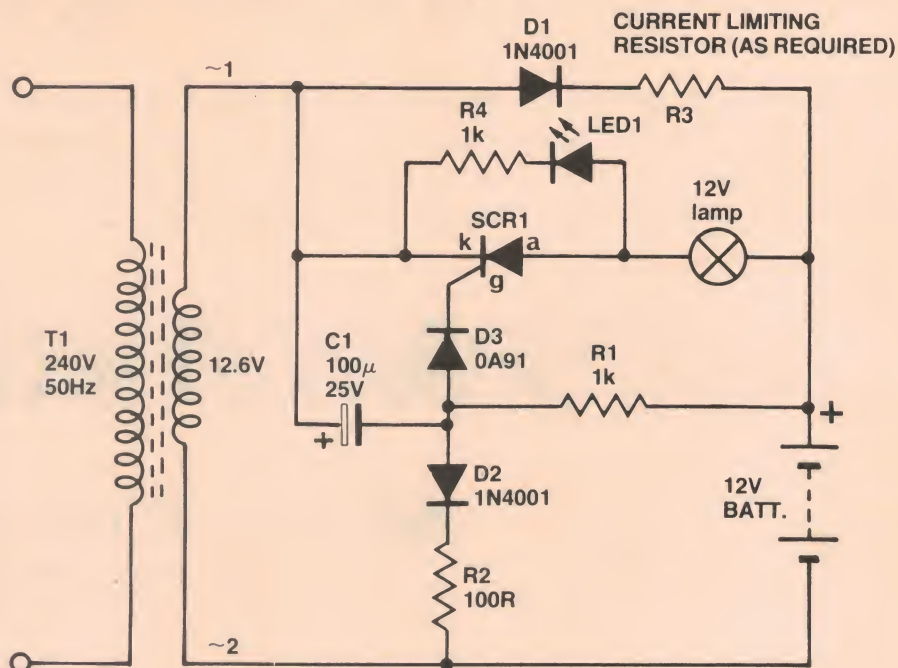

HOW IT WORKS — ETI 597

When the mains power is on, the circuit float charges a NiCad battery from a transformer and rectifier. When the mains fails, a control circuit switches the battery through to the emergency light and the LED on the front panel.

WHEN POWER IS ON the NiCad battery is trickle charged through a rectifier diode D1, which supplies half wave rectified current pulses to the battery. Capacitor C1 smooths out these pulses by charging to the peak voltage from the transformer secondary through

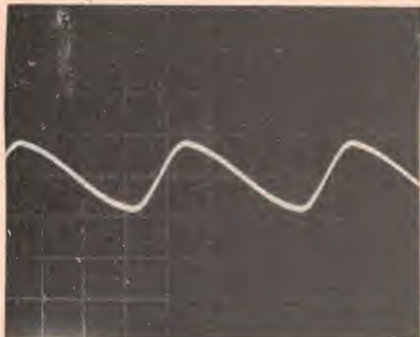

Waveform at the positive lead of C1, showing the 50 Hz ripple.

D2 and R2 and discharging through R1 and the battery when the output from the transformer falls. The discharge time constant of C1 is much longer than its charge time constant, so that it does not have time to discharge fully during the transformer negative half cycle. So C1 stays at a high positive voltage, with some ripple, as can be seen from the oscilloscope photograph.

As C1 remains charged, the voltage on the gate of SCR1 is always lower than the voltage on its cathode and SCR1 is therefore reverse biased, so that the emergency lamp is switched off. LED1 is also reverse biased and not illuminated.

WHEN THE POWER FAILS the output from the transformer falls to zero and C1 starts to discharge through R1 and the battery. Once C1 is fully discharged it begins to charge in the reverse direction from the battery until the voltage on the gate of SCR1 is about 0.6 volts higher than the voltage on its cathode. SCR1 then switches on, lighting the emergency lamp. LED1 is now forward biased and illuminated. The voltage on C1 does not rise any further and the capacitor is not damaged by the reverse polarity because the voltage across it is less than the forming voltage of the electrolyte.


When the power returns, C1 charges again through D2 and R2, turning off SCR1 and resetting the circuit.




NiCad batteries may be used with this project and they can be obtained in ratings from 500 mAh up to 2 Ah capacity. Sealed lead-acid batteries can be obtained in higher capacities (see page 61).

BATTERY CAPACITY	VALUE OF R3 (5W, 5%)
500 mAh	82R
1.2 Ah	33R
2 Ah	22R
4 Ah	10R
6 Ah	6R8

emergency lighting unit



FLAT ON SIDE OF
CASE OR SHORT
LEAD



Construction



All the components are housed in a plastic case with an aluminium front panel that has terminals for the battery and lamp connections. The LED which indicates power failure is set in the panel above the lamp terminals.

As the circuit is very simple, we decided to mount the electronics on a length of twin tag strip. Mount the components as shown in the diagram on this page, being careful with the orientation of the diodes and the electrolytic capacitor.

The current limiting resistor R3 sets the charging current to the batteries and must be selected to suit the voltage and capacity of the battery. Consult the table on page 58 for the correct value. This resistor may run quite warm, so it should be mounted so that it is spaced about 5mm above the tag board for adequate ventilation.

If the emergency lamp draws 1 A or less, the SCR does not need a heatsink; if the lamp draws between 1 A and 2 A, the SCR can be mounted on the aluminium front panel with an insulating mica strip between it and the metal. For load currents over 2 A a heavier SCR with its own heatsink would have to be used, but we do not recommend drawing this much current because this is an emergency lamp and you won't want to discharge the battery too quickly.

Next wire the connections from the tag board to the LED, the terminals and the transformer. Be extra careful with all of these connections and use insulated hookup wire for all wiring, including connections across the tags on the tag board. The transformer is mounted in the top right corner of the box, leaving enough room for the terminals and the tag board.

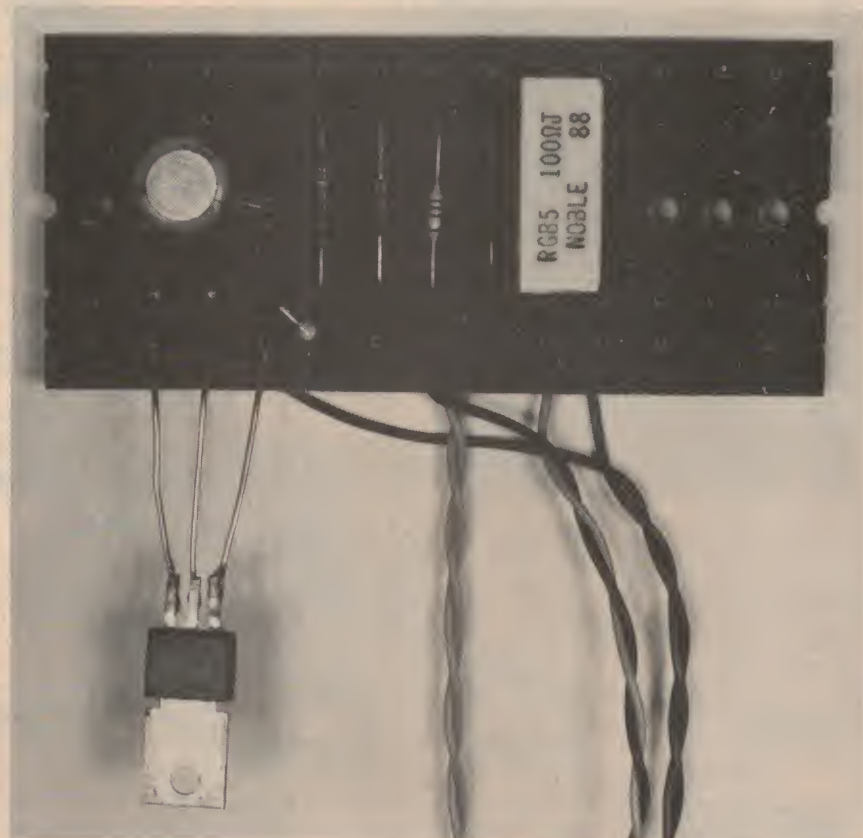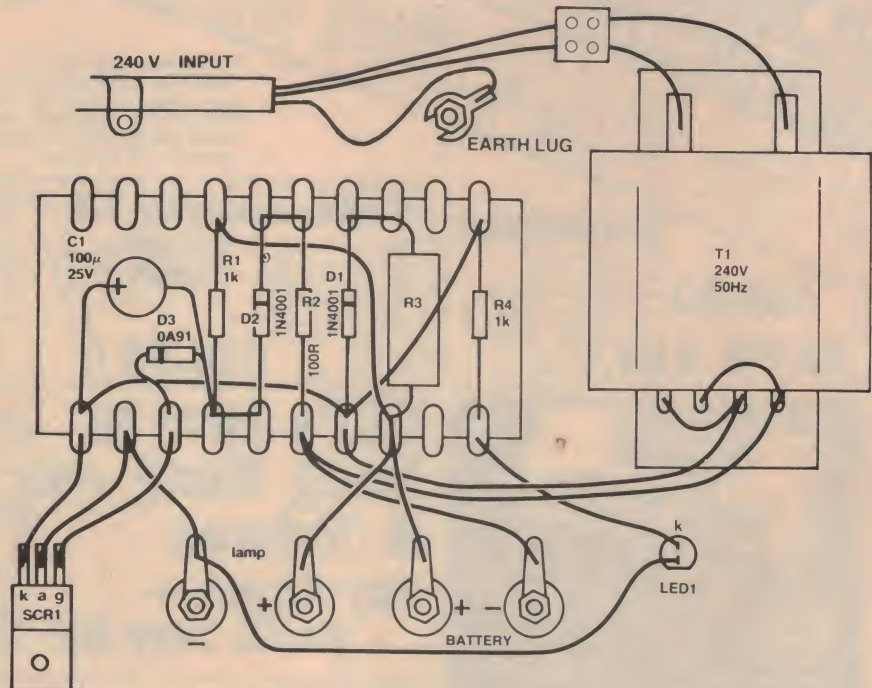

Showing the components mounted on the tagstrip.

Bill Edge's

ELECTRONIC AGENCIES

bankcard


welcome here
115-117 Parramatta Road Concord 2137
(Corner Parramatta Rd & Lloyd George Ave)
Tel. 745 3077 (two lines)

what else do we carry?
HARDWARE * TOOLS * SEMIS
VALVES * HI-FI * KITS * WIRE
MIKES * SPEAKERS * PA EQUIPMENT
CAR CASSETTES * INTERCOMS * CAR RADIOS
BOOKS

MAIL CHARGES
\$1 packing charge plus the following:
FREE
\$1.00 All heavy or bulky items (ove.
\$2.00 20 kg) send 'Freight-on' through
\$3.00 carrier. Bankcard welcome—by
\$4.50 mail, phone or over the counter.

amazing
Metal Detector

NEW
KITS



only \$199.00

NOTE: photograph shows unit mounted on handle which is not supplied in the kit.

Join the gold rush with this incredible discriminating metal detector project from ETI. Features 4 mode operation, ground balance pre wound search head plus incredible penetration & sensitivity.

TRADING HOURS
Mon-Fri . . . 9am-5.30pm
Saturday . . . 9am-noon
Sunday . . . 10am-2pm

\$59.90

SAVE \$10

MUSICOLOR

Yes! the famous Musicolor 3—now reduced to \$10 below normal price. Complete kit with deluxe metalwork and front panel

Engine Analyser kit

Keep your car in tune and save fuel. This unit measures RPM, dwell and battery voltage on any 4, 6 or 8 cylinder petrol engine. Complete kit



\$55.50

Light & sound flash kit

Take spectacular action photos. Suits any flash unit—fully variable sensitivity & delay. See ETI Oct



\$26.95

NEW

NEW
Software

For the Sorcerer:
MUSIC: creative 4 voice music \$52.95
PIANO PLAYER: used with MUSIC. Fully graphical \$15.95
CROSS REFERENCE: prints a complete variable & line cross reference voe BASIC program \$12.95
GRAPHICS: Fantastic graphic creations \$32.95
SUPER X: a great text editor \$25.95
JAIL BREAK: new modified (and cheaper) \$9.95
INVADERS: just like in the arcade \$19.95
BASEBALL: Fantastic graphics—and a great game \$15.95
CADAS: cassette base general purpose database system (machine code) \$32.95
HEAD ON COLLISION: You are driving clockwise, and a computer controlled car is coming the other way. \$15.95
FORTH: Serious Z80 program developers will find this program invaluable (requires Development PAC) \$32.95
Sorcerer & TRS-80/System 80 STOCK RECORD: Functions include: List, Edit stock records, update prices, edit/enter items, clear all data, delete item, store & retrieve records on cassette and print out stock list. \$45.95

Bill's been to
Hong Kong
& Taiwan
buy direct—
you'll reap the BENEFIT!



Electronic Agencies is now buying direct. So you buy at a better price. Our lower overheads mean that we can offer you real value on all your electronic needs.

MERRY XMAS

ph meter

3 1/2 digit display, easy to build pH meter. Ideal for pool or fish tank water testing, or lab use.



\$79.50

NEW

Toroidal Transformer

Lighter, quieter, more efficient. What more could you ask for. This transformer delivers 28-0-28V @ 2A. Suits ETI 480, series 4000 or other amps needing ±40V rails.

power without hum

\$59.90

NEW wideband receiver kit

Four ranges from broadcast to 30MHz. Complete kit (see EA Nov 1980 for details). only:

\$65.00



Series 5000 FET Amp

Now you can forget about noise, distortion & hum. The fantastic new Series 5000 FET output amplifier is on its way from ETI. We are preparing a deluxe kit with our own detailed instruction manual. The price will be about \$250 (estimate only).

Please phone us for up-to-the-minute details of this kit.

the Ultimate!

want a case?



wood \$42
low profile deluxe case for amplifiers etc



rack \$49
same case in a rack mount format



wood \$45
slightly deeper for those bigger projects



rack \$55
deeper case in popular rack format

build these superb speakers & save!



Complete kits (all speakers, crossover etc.)

The ETI 4000 speakers have set a new standard for build it yourself audio.

ETI 4000/1 4 way. \$459 pair.

ETI 4000/2 3 way. \$360 pair.

Note "Freight on" only

Cabinets.

Fully assembled & veneered.
For 4000/1 per pair \$300.00
For 4000/2 per pair \$200.00

NEW

Own a microwave?

Microwave ovens are a boon to modern living, but a leaking one is a very real danger. This simple to

build kit checks any microwave oven for harmful leaks. ETI 724. Complete kit only:

\$14.95.

FREE speaker catalogue

\$289.00

FM320

The famous FM320 at a price you'll find hard to beat. UHF 40 channel CB. Antennas to suit: \$19.99 (mobile) \$95.00 (base)




DEAR CUSTOMERS, Please phone us before coming in to check that what you're after is in stock and that the price is correct. Bill Edge and staff.

emergency lighting unit


Secure the mains power lead by passing it into the box through a clamping type grommet. Connect the earth wire of the mains lead to the solder lugs on the transformer case and to the front panel. Make sure that these connections are well made and that there is slack left on the mains earth wire, so that if the cable is pulled out of the grommet the earth wire will be the last to break off.

Lead-acid storage batteries, such as these sealed, gel electrolyte types are ideal for use with this project and can be obtained in ratings up to 6 Ah. The two batteries on the left are 6 V types rated at 4 Ah, while the 12 V type on the right is rated at 6 Ah.

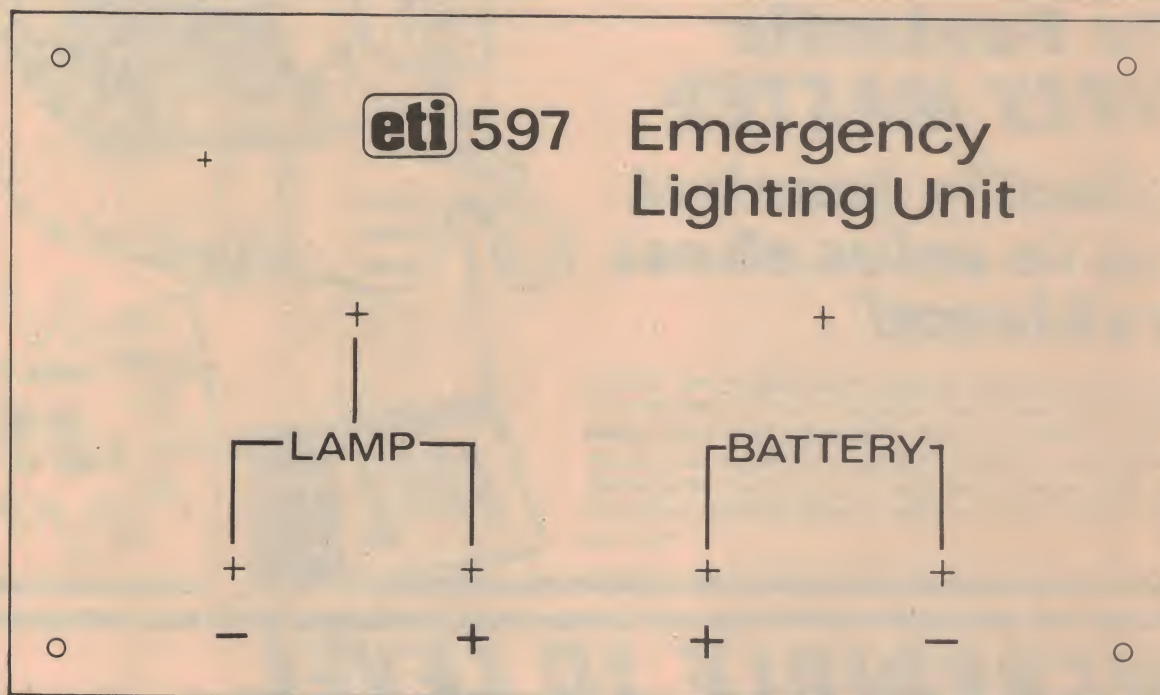

HOLD IT!

IN ANY POSITION
AND LOCK IT THERE

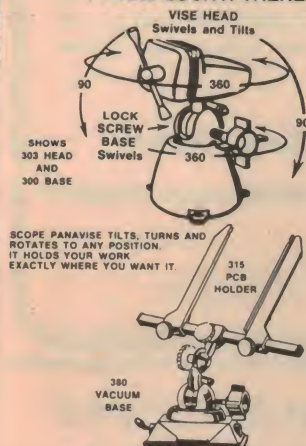

PHASE 1

SELECTION OF HEADS



**CODE 303
STANDARD HEAD**
The top selling head, it has jaws 2 1/4" (63.5mm) wide which open 2 1/4" (57.2mm). The tough yet gentle nylon jaws have a satin finish to improve grip. This general purpose head has exceptional quality and strength. The heavy duty adjusting screw turns in a brass bushing which is pressure die cast into the head as are the double steel guide pins.



**CODE 315
CIRCUIT BOARD HOLDER
(EXTRA ARMS AVAILABLE)**
Holds p.c. boards of any shape and size to 12" (304mm) wide (including the S100) exactly where you want them — flat, vertically, or any angle in between, when used in a PANAVISE base. The arms may be moved independently in either direction and also may be positioned adjacent to one another. Longer bars are available as accessories for larger boards as are additional sets of arms for dual or multiple board use.



**CODE 306
WIDE OPENING HEAD**
Opens a full 6" (152mm) with jaw width of 1 1/4" (44.5mm). The contoured neoprene jaws provide a cushion over the steel jaw plates to gently yet firmly hold delicate items. They are deeply ribbed on one side and are reversible to a wide "V" configuration for holding cylindrical objects such as clock works, glass breakers, etc. When working with head, the pads are removed. The black oxide finish reduces glare and eys fatigue.



**CODE 337
FIXTURING HEAD**
Permanent fixturing for production line assembly or repetitive repair work can be designed and bolted to this head easily with its six slots and bolt holes. Wood carvers and pattern makers secure their wood blanks to this head where it is held firmly, in any position, through final finishing. The flat ground surface is 5 1/4" (137mm) in diameter. The steel stem is die cast into the aluminum head.

PHASE 2

SELECTION OF BASES



**CODE 300
STANDARD BASE**
Holds all regular PANAVISE heads and Circuit Board Holders. The patented load control knob and exclusive split-ball feature have a range of tension which permits moving or work to any position desired. Then, when needed, this single knob firmly locks the head in place. In addition, loosening of this knob reduces the load on the split-ball permitting the head to be removed from the base. This exclusive feature permits you to get multi-use from one base.



**CODE 380
VACUUM BASE**
Moving the black-tipped lever arm attaches the Vacuum Base instantly with a firm grip, without marring, to smooth non-porous surfaces. A flip of the lever attaches and releases the heavy duty suction pad. Moistening the pad increases its grip.



**CODE 305
LOW PROFILE BASE**
The Low Profile Base has all the tilts, turns, and load control features as in the Standard PANAVISE base. Only 2 1/4" (64mm) high, it is designed for working close to the bench surface.



**CODE 334
UP/DOWN CONVERTER BASE**
An attachment for the 325 Up/Down Positioner giving the additional dimension of variable height (14" or 355mm) to the same exclusive tilt and turn mechanism as in the other bases.

For further information contact — SCOPE LABORATORIES (03) 338-1566. TLX: AA38318

SYDNEY, N.S.W.
(02) 546-6144
ADELAIDE, S.A.
(08) 223-2261

BRISBANE, QLD
(07) 221-1933
TOWNSVILLE, QLD
(077) 71-3448

ROCKHAMPTON, QLD
(079) 27-3370
HOBART, TAS
(002) 34-2811

LAUNCESTON, TAS
(003) 31-5545
PERTH, W.A.
(09) 381-4155

WELLINGTON, NZ
85-9578
AUCKLAND NZ
54-6029

become a **CHESS MASTER** with these two superb products from **DICK SMITH**

The Fantastic CHESS MASTER actually teaches you to solve chess problems!

This is the machine for all ages that enables you to learn and practise chess. The challenge is to solve problems in the least number of moves. Play it alone or with others and experience different tactics, strategies and check-mates. With each Chess Master you get seven booklets containing 50 moves, a total of 350 different moves to play.

Cat. X-1257



**ONLY
\$35**

INCREDIBLE 10 LEVEL COMPUTER CHESS GAME

Cat. X-1255



Whatever level of chess game you're into, this unit has them all. You play the computer at the level you select from beginner through to expert. To aid you in your game the unit comes complete with integral chessboard and pieces plus power supply.

\$179

**Contains a
microprocessor**

\$6 below cost
freight anywhere
in Australia

Credit terms
available to approved applicants

DICK SMITH Electronics



**SEE OUR OTHER ADS FOR
FULL ADDRESS DETAILS**



**GRADUATE
TO**

University

**METERS AND
INSTRUMENTS**

T.D. SERIES PANEL METERS

Suitable for the hobbyist and manufacturer. Highest quality — complies with Australian Standard AS.1042. Moving coil, high torque, core magnet self shielded. Most standard ranges available ex-stock. Special scales, pointers and ranges on indent.



Available in 6 sizes


Model	TD-48	48 x 42mm
	TD-66	66 x 60mm
	TD-86	86 x 78mm
	TD-106	106 x 83mm
	TD-118	118 x 106mm
	TD-152	152 x 110mm

TD Series meters can be rear mounted.

- TEST INSTRUMENTS
- PANEL METERS
- DIGITAL METERS
- EDUCATIONAL EQUIPMENT
- SWITCHBOARD INSTRUMENTS

MULTIMETERS

New CTi-500 "Industrial" diode protected

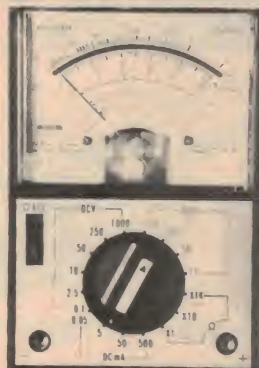


20,000 Ohms per DC
AC and DC Volts
DC amps to .5A
Resistance and db
Size 130 x 90 x 38mm
An excellent general purpose unit

DIGITAL MODEL 2200A
3½ digit LCD display,
12mm high

The famous MVA-100CN
"Deluxe" now with fuse
and diode protection

100,000 Ohms per V DC
AC and DC Volts to 1Kv
AC or DC Amps to 10A
Resistance .1 Ohms to
200M Ohms
db minus 20 to plus
62 dB
4mm terminals
Polarity switch
Shock proof movement
Size 180 x 140 x 80mm

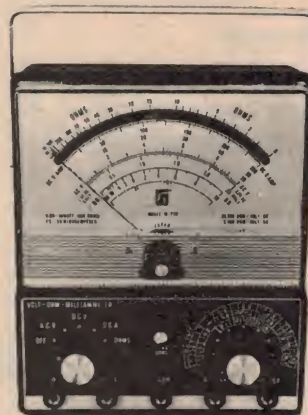

Two input terminals
Over range indication
Overload protection
200 hours continuous operation
Auto zero and auto polarity
Low battery warning

TEST INSTRUMENTS Non Contact Voltage Indicator DEAD OR ALIVE?



When you need to know
don't take chances.

EZ SCAN

The non contact EZ-Scan unit gives an immediate visual indication of voltage, with or without current flowing at distances up to 15cm from the source. Battery powered and all solid state, the unit is small enough to be carried in a pocket, and tough enough to leave in a tool box.

To find a break in a cable, a bad earth, a faulty fitting or just to know if it's live — use the EZ-Scan. For all unshielded AC electrical systems, 60V and higher.

PRICE: HIGHEST QUALITY at the LOWEST PRICE.

GUARANTEE: 90 day, backed by University after sales service.

SERVICE: 24 hour efficient repair service.

University Graham Instruments
Pty. Ltd.

PO Box 204, Enfield, NSW. 2136.
Phone (02) 53-0644 Telex AA21398
Melbourne Phone (03) 387-6170

**SICK OF
SEARCHING FOR
CONVERSION
FACTORS?**

**NOW
AVAILABLE**

**THE
COMPREHENSIVE
BOOK OF
CONVERSION
TABLES + FACTORS**

FEATURES

- **54 pages of conversions.** Alphabetically listed. Over 2700 individual conversions.
- **All conversions simple multiplications.**
- **8 pages of terminology explanations.**
- **8 pages of lists of constant factors.**
- **All in one inexpensive pocket sized book.** 110 x 195 x 4mm.
- **14 day money back guarantee.**

Price: \$4.00 incl. P&P

I enclose \$.....cheque/m.o.

for.....copy/s of the Book of Conversion Tables + Factors.

Name.....

Address.....

.....P'code.....

Mail to:

**DATIV PROMOTIONS,
PO BOX 201,
ARMADALE, VIC, 3143.**



**PLESSEY
COMPONENTS**

NEW PRODUCT

NOVOL


**NON VOLATILE
LOGIC
256 BIT MEMORY
(64 x 4)**

MN9210

- Electrically alterable
- Non-volatile memory
- MNOS technology (not NMOS)
- plus 5 V minus 12 supply
- Low current programming supply minus 39 V

FEATURES

- Guaranteed data retention of one year in the absence of applied power.
- Latching data and address inputs.
- Three-state outputs on data lines.
- TTL/CMOS compatibility
- Single word preprogramming facilities.
- Temperature range minus 40 degrees C plus 70 degrees C.
- 18-pin dual-in-line package.

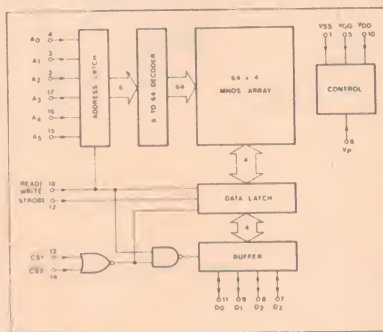

This is a new addition to our existing range of Novol.

- MN9102 — 4 bit data latch
- MN9105 — 4 decade BCD counter
- MN9106 — 6 decade UP counter
- MN9107 — Counter to 100 hours
- MN9108 — Counter to 10,000 hours.




**PLESSEY
COMPONENTS**

**PO BOX 2, VILLAWOOD,
NSW 2163.
PHONE: (02) 72-0133.**

**35
years
young**

**and
still on
top**

NEW CRYSTAL MARKER OSCILLATOR

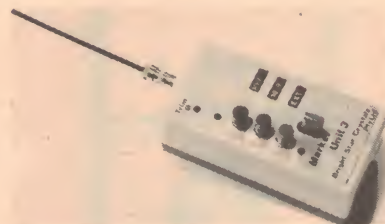

Marker frequency from 2MHz to 20MHz

Manufacturers of

PIEZO ELECTRIC CRYSTALS
Contractors to Federal and State
Government Departments.

REPRESENTATIVES:

NSW: J. E. Waters,
11 Salisbury St, Botany. 2019.
Ph 666-8144.

SA: Rogers Electronics,
65 Magill Rd, Stepney. 5069.
Ph (08) 42-6666.

QLD: Fred Hoe & Sons P/L,
246 Evans Rd, Salisbury North.
Brisbane. Ph 277-4311.

WA: Westest Electronics,
71 Jean St, Hamilton Hill. 6161.
(Mail only) Ph (09) 337-6393.

TAS: Dilmond Instruments,
PO Box 219, Bellerive. Hobart.
Ph 479-47-9077

Send SAE for new catalogue or quote for
your requirements.

**Bright Star
Crystals** Pty
Ltd

PO Box 42, Springvale,
Ph (03) 546-5076 Telex AA36004

Lab Notes

Voltage regulators — circuits and techniques

Here's a 'cookbooklet' of voltage regulator circuits and techniques covering everything from simple zeners to three-terminal regulators from UK correspondent **Ray Marston**, with additional material from staff.

ONE OF THE most common and mundane tasks facing the electronics enthusiast is that of designing voltage regulator circuits, ie: circuits that produce a stable and well defined dc output voltage over a wide range of load current variations. These circuits may vary from simple zener networks, designed to provide load currents up to only a few milliamps, to fixed-voltage high current units for powering logic boards, etc, or to variable-voltage high current units designed to act as general purpose pieces of test gear.




Figure 1. The simplest regulator. The zener regulator is often used to provide a fixed voltage 'reference' and supplies little or no load current. In such case a 400 mW zener of appropriate voltage is used and biased at about 5 mA. The value of R, in kilo ohms, can be calculated from the formula.

Zener based circuits

A zener diode can be used to produce a fixed reference voltage as shown in Figure 1. Often, the supply voltage (V_{in}) may be subject to fairly wide variations, causing the zener current to vary over a similarly large range. As long as V_{in} is always more than a few volts greater than the zener voltage and pro-

vided that the zener power rating is not exceeded this variation has only a moderate influence on the output voltage of the zener, which typically has an effective output impedance of a few tens of ohms.




Figure 2. The basic zener regulator can be designed to supply a load current of a few milliamps to hundreds of milliamps depending on the zener power rating. Knowing the required load current, the value of R can be calculated from the formula.

A zener can be used as a very simple voltage regulator, providing load currents up to a few mA, by determining the value of 'R' as shown in Figure 2.




Figure 3. The basic 'series pass' fixed voltage regulator using a zener reference. This circuit can deliver up to about 100 mA at 11.4 volts. Q1 is basically an emitter follower, the base being 'clamped' at 12 V by the zener. C1 reduces the circuit's ac impedance.

In most practical voltage regulator applications the zener is simply used to apply a 'reference' voltage to a high-gain non-inverting buffer amplifier, which then supplies the required output power. The simplest example of this type of circuit is shown in the series-pass regulator circuit of Figure 3.

Op-amp regulators

One way of improving the regulation of the Figure 3 circuit would be to use a Darlington or super-alpha pair of transistors in place of Q1. An even better solution is to use the op-amp plus transistor buffer stage shown in Figure 4. Choice of circuit would perhaps depend on component availability and the application.

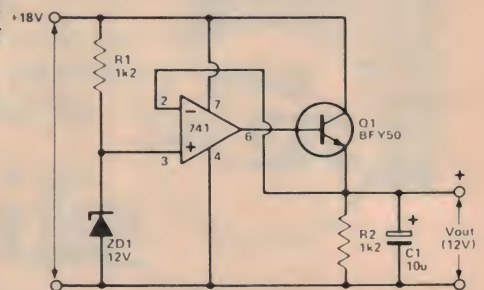


Figure 4. A considerable improvement in regulation is achieved by employing a high gain op-amp to drive the series pass transistor plus negative feedback from the dc output. This circuit will deliver up to about 100 mA and the output voltage stays within a few millivolts of the zener reference for output current variation from zero to maximum.

CHRISTMAS SPECIALS



Save
near
\$24

TI Programmable 58C


Here's a programmable calculator that offers more power, flexibility and capability and features TI's exclusive Solid State Software. With Master Library module with 25 programmes in math, statistics, and finance you can choose from 12 optional libraries. You can also programme the TI programmable 58C right from the keyboard. TI's Constant Memory feature retains data or programme information even when the calculator is turned off.

It has up to 480 programme steps or 60 memories with 4 types of display testing with independent test or "Y" register and 10 additional test registers.

Over 170 functions and operations in scientific, engineering, and statistical fields. Complete editing and error correction capabilities with single-step and back-step keys.

The TI Programmable 58C gives hard copy when used with the PC-100C thermal printer/plotter.

\$122.99 + TAX = \$141.44

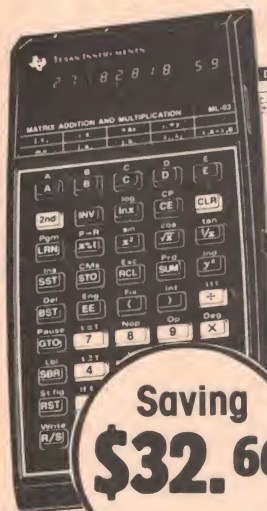

Saving
\$32.66

The T.I. Programmable 59

A revolutionary new personal programmable calculator. 960 programme steps or 100 memories. Master library module plug in feature. 25 different programmes in key areas. Four types of display up to 10 additional test registers. 72 useful labels. Up to 6 levels of sub routines. Complete programme editing. Operates with PC-100C printer. Optional solid state software libraries.

\$276.99 + TAX = \$318.54



Save
Over
\$23

\$198.99 + TAX = \$228.84

PC-110C

The PC-110C printer/plotter turns your programmable T.I.58C or T.I.59 into a high speed quiet printer calculator that prints, lists and traces your programme.

TEXAS INSTRUMENTS
INCORPORATED

silicon valley



ADELAIDE: 170 Sturt St, Adelaide.
Telephone (08) 51 4080

BRISBANE: 22 Ross St, Newstead.
Telephone (07) 52 1339

MELBOURNE: 208 Whitehorse Rd, Blackburn.
Telephone (03) 877 5311

PERTH: Unit 1, 25 Brisbane St, East Perth.
Telephone (09) 328 8091

SYDNEY: 23 Chandos St, St. Leonards.
Telephone (02) 439 2965

NOTE: Offer closes 24th December, 1980

Lab Notes

The op-amp based regulator of Figure 4 supplies 12V at currents up to 100 mA and gives excellent regulation, despite its simplicity. The op-amp and transistor (Q1) are interconnected as a unity voltage gain non-inverting dc amplifier that has an overall current gain of about one million! The output voltage will be within a few millivolts of the zener reference value and the output impedance is less than one milliohm. The safe output current driving capacity of the circuit is limited to about 100 mA by the power rating of Q1, which should have a small 'flag' or push-on heatsink attached.

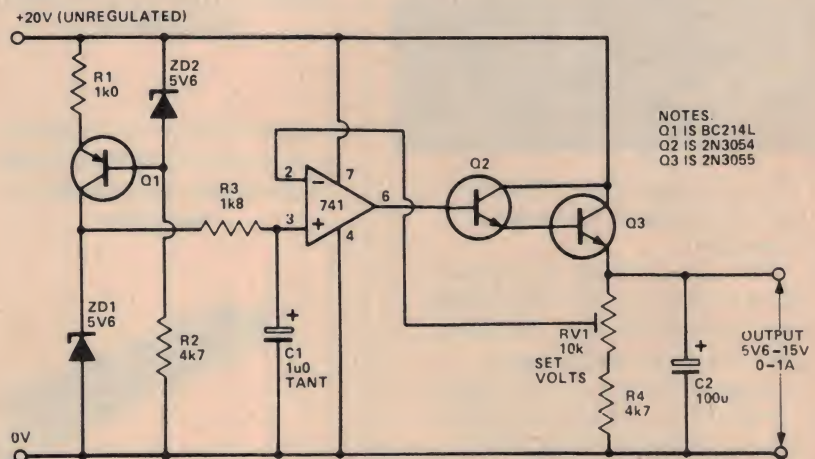


Figure 5. This circuit is a little more sophisticated and performs better than the Figure 4 circuit. This circuit will deliver up to 1 A output current, output voltage being variable between 5.6 V and 15 V. Thermal drift is near zero.

eliminated by making ZD1 a 5V6 type, with near-zero (actually about $-0.2 \text{ mV}/^\circ\text{C}$) temperature coefficient; the op-amp output voltage can then be set to the desired value (greater than 5V6) by using feedback components RV1-R4 to set the op-amp's voltage gain at some appropriate value.

Finally, the load current capacity of the circuit can be set to a fairly high value by using a Darlington-connected power transistor in the series pass output stage. Note that Q2 and Q3 could be replaced by a BDV65B Darlington device.

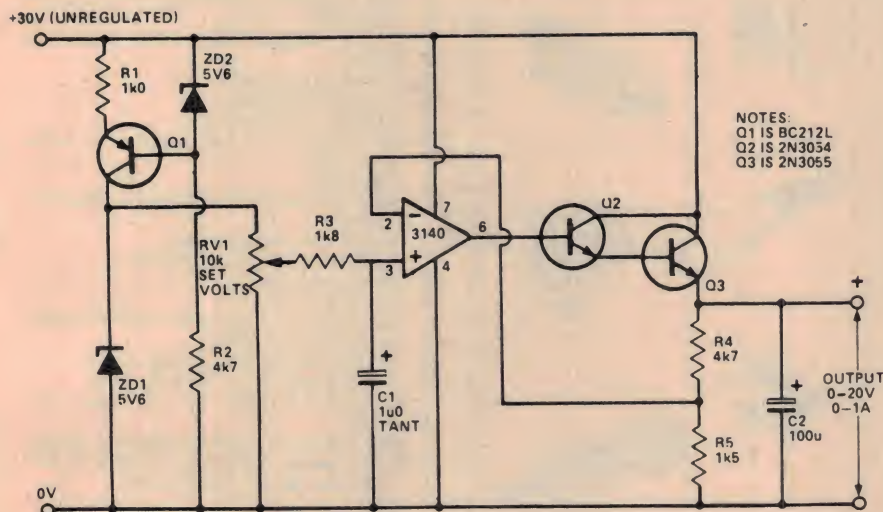


Figure 6. This variation on the Figure 5 circuit permits the output voltage to be varied between 0 V and 20 V. The 3140 op-amp has a fixed voltage gain of about four, fixed by R4/R5.

This circuit can be modified to provide greater current output by replacing Q1 with a power Darlington transistor such as the BDV65B. A suitable heatsink should be used.

The performance of the basic op-amp circuit of Figure 4 can be improved in a variety of ways, some of which are shown in Figure 5. The first improvement that can be made is to make the zener reference voltage (ZD1) independent of supply voltage variations by powering ZD1 from the output of constant-current generator Q1-R1-ZD2-R2. Next, the zener noise can be eliminated by feeding the reference voltage to the op-amp via low-pass filter R3-C1. Thermal drift effects can be

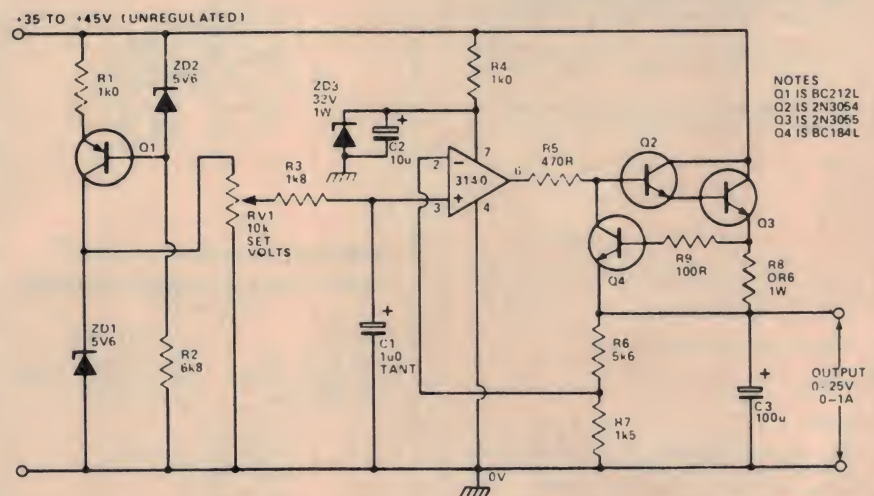


Figure 7. A further refinement is the addition of current limiting and overload protection. Q4 senses the voltage across R8 which is in series with the output. When the current exceeds 1 A, Q4

will be biased on and rob current from the base of Q2, preventing further increase in output current. The op-amp is protected against excessive supply rail voltage via R4 and ZD3.

IMAGINE.

A computer game that has drawn the attention of the national news media.

A computer game that has people around the world clamoring for it.

A computer game that turns your love life into a *ménage à trois*... you, your mate, and your computer!

That's Interlude—the hottest new software program for personal computers.

But it's more than just a game. It's an experience that will tantalize you...romanticize you...fantasize you...and often surprise you.

Interlude begins with a unique computer interview of the participants to determine their mood. Then it searches its memory to select the best Interlude for the occasion. You may be referred to the instruction manual which describes most of the 106 Interludes, or your instructions may appear on your screen if you've chanced to hit upon one of the many surprise Interludes buried within the program. (When you discover secret Interlude #99, your love life may never be the same again!)

Interlude...it's fun...it's fanciful...it's fantastic. It's the computer game for adults. Are you ready for it?

Interlude™ The Ultimate Experience.

DICK SMITH ELECTRONICS
PO Box 321 North Ryde NSW 2113

☐ Yes! I want the Ultimate Experience. Please rush a copy of 'Interlude' for my System 80 or TRS-80 computer. I am over 18 years of age.

☐ I'm interested! But I haven't a computer. Please send details of the incredible System 80 computer so I can enjoy Interlude too.

Name _____

Address _____

P code _____

Interlude program and detailed instruction manual costs \$22.50 plus \$2.00 pack & post. My cheque for \$_____ is enclosed.

OR Please charge to my Bankcard Exp. date _____

No. 496

Signature _____


(Or you can order Interlude by phone. Call Sydney (02) 888 3200 and ask for Bankcard Phone Orders. Quote your Bankcard number & expiry date and Interlude will be sent to you the same day!)

ALSO AVAILABLE FROM ALL DICK SMITH STORES:
Sydney, Melbourne, Brisbane, Adelaide, Canberra,
Perth & Wollongong, plus re-sellers in all areas.



CONNECTORS & ELECTRONIC COMPONENTS

Superb quality and reliability from one of the oldest and most experienced manufacturers in the U.S.A.

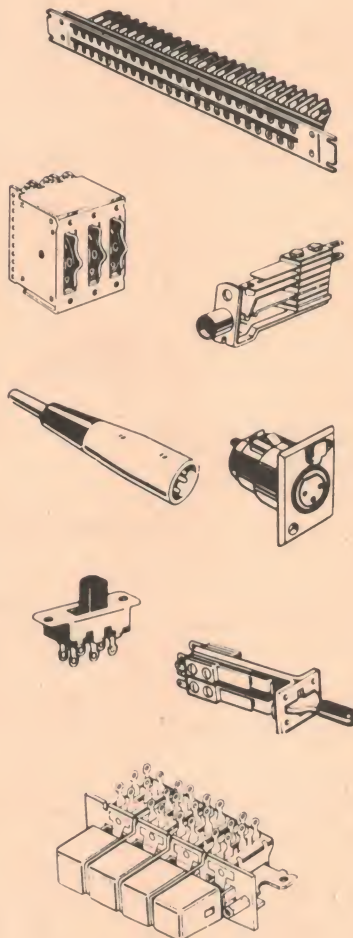

AUSTRALIAN DISTRIBUTORS AUDIO TELEX COMMUNICATIONS PTY. LTD.

SYDNEY 1 Little Street, Parramatta, 2150
Tel: 633 4344

MELBOURNE 7 Essex Road, Mt. Waverley, 3149
Tel: 277 5311

BRISBANE 394 Montague Road, West End, 4101
Tel: 44 6328

NEW RELEASE



GW ELECTRONIC TEST INSTRUMENTS

OSCILLOSCOPES

GOS-935 at \$199.00 (\$173.00 excl. tax).
GOS-955 at \$299.00 (\$260.00 excl. tax).
A laboratory quality instrument, fully solid state with 6.5 MHz useable response.

SPECIFICATIONS

Vertical Deflection

Sensitivity: 10mV/DIV.
Attenuator: 1/1, 1/10, 1/100 and GND.
Bandwidth: DC: DC-5MHz(-3dB). AC: 2Hz-5MHz(-3dB).
Input Impedance: 1M Ohm plus/minus 5 percent within 35PF.
Max Input Voltage: 600VP-P or 300V (DC plus AC peak).

Horizontal Deflection

Sensitivity: 250mV/DIV.
Bandwidth: DC-500KHz(-3dB).
Input Impedance: 1M Ohm plus/minus 10 percent within 35PF.

Time Base

Sweep Frequency: 10Hz-100KHz in 4 ranges and fine control.

Linearity: Less than 5 percent.

Synchronizing: Internal and external.

Synchronization

Type of sync: INT, EXT.
Sync Amplitude: INT: more than 1 DIV on the screen.
EXT: more than 2VP-P.

GOS-955: Internal minus and plus; external; line 0-140 degrees for line frequency sweep.

Calibration: 0.1V P-P 1KHz square wave (GOS-955).

CRT Type: 75mm (GOS-935, 130mm (GOS-955).

Power requirements: AC110/240V 50/60Hz 10VA and approx. 20VA (GOS-955).

OTHER GW INSTRUMENTS

AUDIO GENERATOR, GAG-808A, at \$189.00 (\$164.00 excl. tax). Sine/square wave, frequency range 10Hz to 1MHz in 15 ranges.

AC MILLIVOLTMETER, GVT-706 at \$169.00 (\$146.95 excl. tax). High sensitivity, RMS scale 1mV-300V in 12 ranges.

RF ATTENUATORS

GAT-069, 0-69dB in 6 steps, 0-250MHz at \$69.50 (\$64.78 excl. tax).

GAT-872, 0-72dB in 8 steps, 0-250MHz at \$74.50 (\$64.78 excl. tax).

AVAILABLE FROM

NSW EMONA ENTERPRISES P/L (02) 212-4815. RADIO DESPATCH SERVICES (02) 211-0191. DAVID REID ELECTRONICS P/L (02) 29-6601. MARTIN de LAUNAY Newcastle (049) 24-741, W'gong (042) 28-6020.

VIC RADIO PARTS GROUP (03) 329-7888.

SA INTERNATIONAL COMMUNICATION SYSTEMS P/L (08) 47-3688.

WA LETCO TRADING CO. (09) 387-4966.

Lab Notes

Three terminal regulators

Three terminal regulators are remarkably easy to use, as shown in the basic circuits of Figures 8 to 10, which show the connections for making positive, negative and dual regulator circuits respectively; the ICs shown in these examples are 12 V units with current ratings of one amp. Note that a 270n or greater value disc ceramic capacitor should be connected close to the input terminal of the IC and a 10 μ or greater electrolytic to the output.

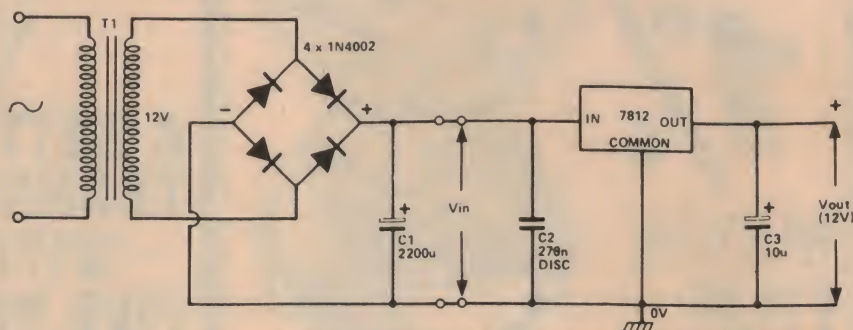


Figure 8. Circuit for the common-or-garden three-terminal fixed voltage positive regulator. Note that C2 and C3 should be mounted as close to the regulator's terminals as is physically possible.

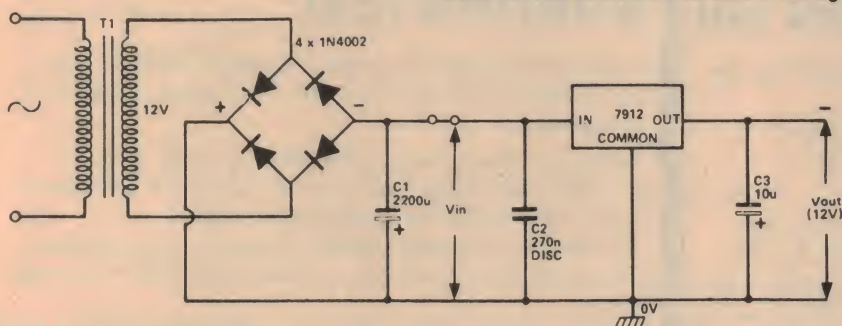


Figure 9. The negative voltage rail counterpart of Figure 8. Don't forget heatsinks.

These capacitors should be connected as close to the device's terminals as is physically possible. They can be quite good RF oscillators if this is not done correctly!

The output voltage of a three terminal regulator is referenced to the 'common' terminal of the IC, which is normally grounded. Most regulator ICs draw quiescent currents of a few mA, which flow to ground via the common terminal. The regulator output voltage can thus be 'jacked up' from the designed value by simply biasing the 'common' terminal with a suitable voltage.

There are two simple ways to do this. The first is shown in Figure 11. The required extra voltage is obtained by passing the IC's quiescent current through a trimpot (RV1). The trimpot is then set to provide the required output

voltage. Quiescent current is typically 7 mA to 11 mA. This technique is adequate in most applications, although

the output voltage obviously shifts slightly with changes in the IC's quiescent current and thus regulation is degraded a little.

The output voltage of a three terminal regulator can be increased by a fixed amount by connecting a suitable value zener in series with the common terminal as shown in Figure 12. Output voltage is then the regulator voltage plus the zener voltage, in this case, 17.6 volts. Note that the quiescent current from the common terminal of the IC may not be sufficient to drive the zener and extra bias current is best provided. Here, R1 serves that purpose.

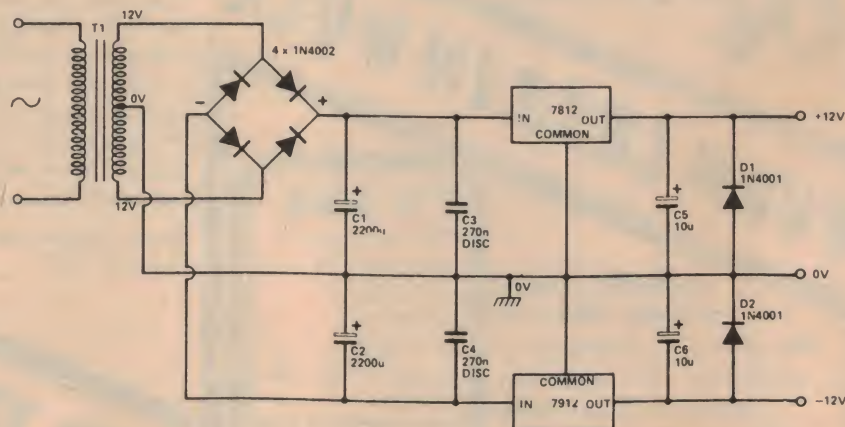


Figure 10. Circuit of a dual positive/negative power supply employing 1 A three-terminal regulators.

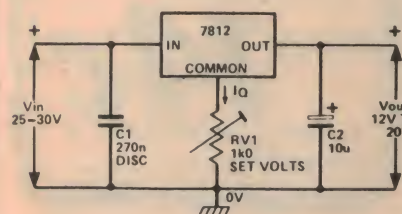


Figure 11. A very simple method of varying the output voltage of a three-terminal regulator. Regulation is slightly affected.


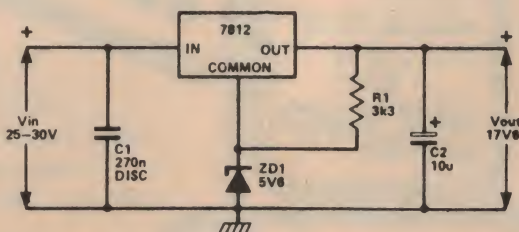


Figure 12. The output voltage can be 'jacked up' by inserting an appropriate zener in series with the regulator's common lead.

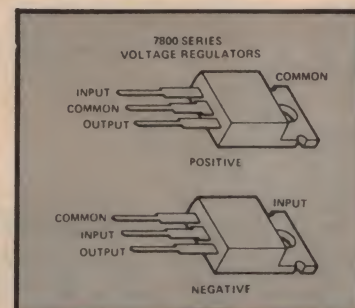

1%

METAL FILM:

BUT THEY'RE NOT 35¢ EA!



In the past, if you wanted a 1% resistor from us you had to pay 35¢ each! So most people settled for 5 or 10 percent resistors and circuits were designed to accommodate high variations. Now look at the price: Dick Smith Electronics now import high stability, precision made 1% tolerance metal film resistors: and they sell for a **maximum** of 6 cents each (one off!) Why would you still use five or ten percent resistors in your circuits when you can use 1% metal film types for practically no more?

6c In One-Off Quantities.

EVEN LESS IN BULK

MANUFACTURERS, DESIGN LABS, ETC:

Need large quantities of precision 1% metal film resistors? Dick Smith offers special prices for quantity buyers (and there are even bigger savings for OEM quantities).

5* IN 100 UP QUANTITIES

1% pack

300 computer-selected 1% metal film resistors, specially prepared for the design laboratory or the professional hobbyist.

NORMAL VALUE OVER \$15.00 ONLY

\$12⁹⁰



A BETTER TRANSISTOR – WITH A FIVE YEAR GUARANTEE!

You can buy good, old, garden variety BC548's (or their equivalents) just about anywhere. They're cheap and they are popular.

Trouble is, they're too popular. With so many different manufacturers, standards went out the window. One man's 'prime spec' BC548 is another man's reject.

We decided to change all that. We found a manufacturer who could make transistors as good as any that were on the market.

And if we were prepared to pay a little extra he would make them even better.

We paid a little extra - and we got a better BC548.

The good news is that you don't pay any extra. We're selling our own branded BC548's (we call them DS548 to distinguish them from the rest) at the same price - perhaps even lower - than you're probably paying now.

And just to make things easy, we're even branded the leads so you won't make mistakes.

They're so good we're prepared to back them with a full five year guarantee: as long as they are used within specifications, we'll replace any of our DS...

series transistors that fail within five years!

Does anyone else give you that sort of guarantee?

AND THEY COST LESS!

5 year guarantee applies only to transistors mentioned above

DS 547/548/549

ONLY 14c

EVEN LESS FOR BULK DS 557/558 17c each

DICK SMITH Electronics



SEE OUR OTHER ADS FOR FULL ADDRESS DETAILS

Lab Notes

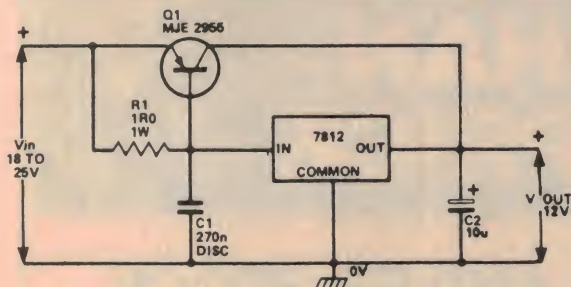


Figure 13. The output current capability of a three-terminal regulator can be boosted by using an external series pass transistor as illustrated. This circuit can deliver up to 5 A.

More current

The output current capacity of a three-terminal regulator can readily be boosted via an external transistor as shown in Figure 13. This circuit, although it looks familiar, is a little unusual. At low load currents, less than 0.6 volts is developed across R1 and Q1 will not turn on. Thus, all the load current will be supplied by the 7812 regulator. When the load current is greater than about 600 mA, the voltage developed across R1 will be sufficient to turn Q1 on and Q1 will commence delivering current to the load.

This circuit can supply up to 5 A. Note that Q1 will need to be mounted on a substantial heatsink, capable of dissipating 60W.

Protection

Overcurrent or overvoltage protection for three terminal regulators can be provided relatively easily. Overcurrent protection for the Figure 13 circuit is illustrated in Figure 14. All it needs is a transistor and a resistor. When the current through R2 (a 0.12 ohm resistor) exceeds 5 A, the voltage across it will turn on Q2, robbing base current from Q1, thus current limiting the output. The 7812 will go into its switch-on/switch-off protection mode.

To protect a three terminal regulator

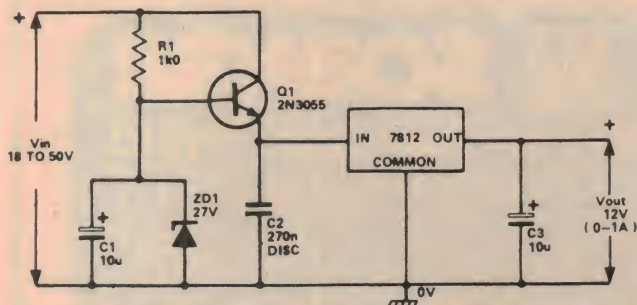


Figure 15. Three-terminal regulators generally have a maximum input voltage rating of 40 V. Where the input may vary widely, at times exceeding the device's limit, this circuit provides protection by using a 'pre-regulator'.

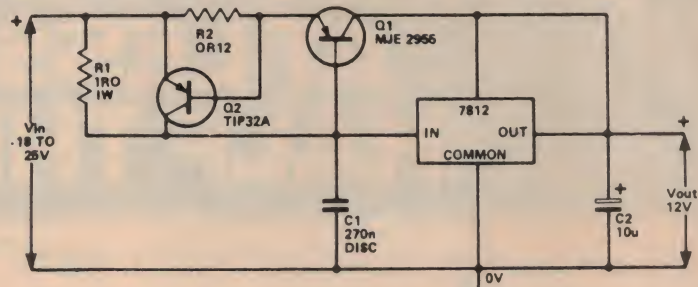


Figure 14. Adding current overload protection to the Figure 13 circuit. It's a wise idea, even though three-terminal regulators generally incorporate thermal shutdown protection.

from damage that may result from excessive supply line voltage, a 'pre-regulator' circuit is added. This is illustrated in Figure 15. You will recognise components Q1, R1, C1 and ZD1 as a simple zener-based series pass regulator (as in Figure 3).

Three terminal regulators can withstand no more than 40 V maximum between the input and common terminals, so this circuit limits the voltage applied to about 27 V. Note that Q1 should be mounted on a heatsink capable of dissipating 25 W.

The LED as a regulator

A low noise regulator can be made using a LED as the reference element. David Tilbrook used this technique in the Series 4000 moving-coil preamp (ETI-473, Oct '79).

The usual reference element for discrete voltage regulators is a zener. As these devices operate in the reverse-biased mode, they are inherently noisy and will put noise on the regulated supply rail. This is likely to degrade the performance of low noise, low level circuits supplied by the regulator.

The circuit of the ± 6 V regulated supply for the ETI-473 moving-coil preamp is reproduced here. A red LED operated in the forward-biased mode drops a constant 1.65 V and generates very little noise. The reference LEDs in

the circuit here are LED1 and LED2. Series regulators Q13 and Q14 regulate the incoming ± 12 V. The potential dividers R21/R23 and R22/R24 divide the voltage present at the output of the regulators and drive transistors Q15 and Q16, and the LEDs. The base-emitter junction in series with each LED will drop 0.6 V; to this is added the LED forward drop of 1.65 V. Thus, whenever the voltage present at the junction of the voltage divider resistors tries to increase above 2.3 V, Q15 and Q16 will increasingly conduct, decreasing drive to the bases of Q13 and Q14 respectively.

Noise on the regulated supply rails is further reduced by the C-R networks, C12/R19 and C13/R20.

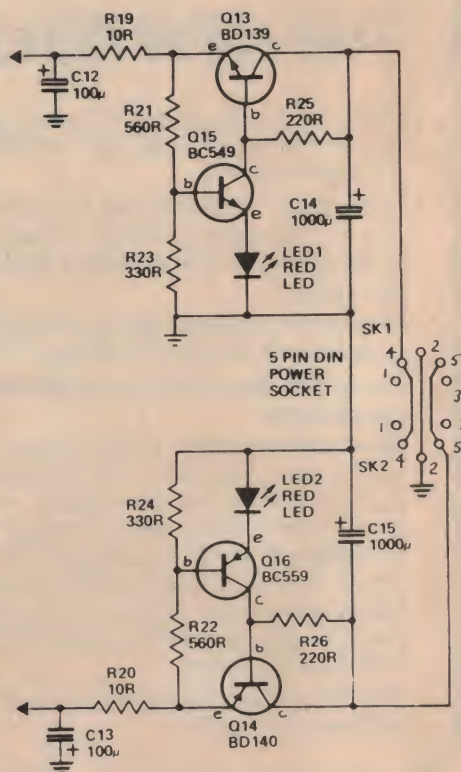


Figure 16. A low noise regulator is necessary in some applications, in which case zeners cannot be used as they generate noise. LEDs can be used as 'quiet' voltage reference sources, as illustrated in the ± 6 V regulators from David Tilbrook's Series 4000 Moving Coil Preamp project.

NOW! LOW LEAKAGE TANTALUM PERFORMANCE, AT LESS THAN HALF THE PRICE



COMPARATIVE
SIZE



AND EX-STOCK
DELIVERY TOO!

THE NEW RBLL

Why suffer long lead times and pay the extra money for tantalum capacitors when there is a low cost alternative?

Elna, the world renowned capacitor manufacturer has developed an exclusive advanced etching technology for their miniature aluminium electrolytics.

The resulting **RBLL** Series now give you more capacitance and lower leakage than ever before. For critical applications consider these parameters:-

Maximum leakage of .002 CV or 0.3u A (whichever is greater) over the recommended operating temperature range of -40°C to $+85^{\circ}\text{C}$, plus improved frequency characteristics. Smaller space-saving designs in the range 0.1uF to 100uF than normal electrolytics, radial leads and a special seal to minimise leakage current variations when assembling PCB's with insertion machines.

In other words, tantalum-like performance — at a fraction of the price.

WITH ADVANTAGES
LIKE THESE...
WHO NEEDS TANTALUM!

CALL US. WE CAN SAVE YOU A MINT



SOANAR

Soanar Electronics Pty Ltd

A member of the A & R Soanar Electronics Group
30 Lexton Road, Box Hill, Vic., 3128. Australia

VICTORIA: 89 0661 QUEENSLAND: 52 5421
N.S.W. 789 6733 WEST. AUST. 381 9522
STH. AUST: 51 6981 TASMANIA: 31 6533



The one-stop Microcomputer Shop for total service to TRS-80* users

*TRS-80 is a registered Trademark of Tandy Radio-Shack

CISA

NOW AVAILABLE CISA DISK PASCAL

Executes up to 60 times faster than DISK BASIC.
HAS FULL DISK I/O FEATURES and many facilities not available on languages costing many hundreds of dollars.
DO NOT CONFUSE WITH CHEAP CASSETTE-BASED 'TINY' PASCALS.

Systems overlays and developments will be available to registered users at a nominal charge.
Includes the fastest and most powerful screen editor we have seen.
Will edit PENCIL, SCRIPSIT and ASCII files.
PASCAL is much easier to manipulate than ASSEMBLY, and is practically as efficient as it compiles into a true-optimized machine-code.
More efficient than currently available BASIC COMPILERS selling for twice the price.
We honestly believe that this Australian written PASCAL to be the fastest, most sophisticated and powerful high-level language available anywhere in the world for the TRS-80 Model I.

RELEASE 1.0 \$99.00

(numbered copies to registered single-users only)

CISA HARDWARE AND MODS

HEAVY DUTY POWER LINE FILTER
Essential in most domestic situations.....\$65.00
CISA LIGHT PEN (again in stock)
Includes full documentation and sample program.....\$19.95
CISA DATA DIGITIZER
Use this with HISPED program and you really have a business system in LEVEL 2. Requires no system modifications.....\$57.50
AUTOMATIC TELEPHONE DIALLER
Easy attachment to TRS-80. Requires no hardware mods. Complete with software and documentation.....\$57.50
16K UPGRADE KITS
KEYBOARD KIT.....\$85.00
INTERFACE KIT (yes there is a difference) \$105.00
We fit — \$20.00 plus carriage \$5.00 overnight return.
DISK DATA SEPARATOR
These are the components that TANDY forgot. Virtually eliminates all disk I/O errors. Absolutely essential for 77 track users. We fit.....\$49.95 (sorry no kits)
GREEN PHOSPHOR TUBES
Not a cheap plastic overlay. We fit a genuine professional standard VDU tube with 1/4" armoured low reflective front panel. (no kits).....\$99.00 (fits old and new type Tandy VDU and current Dick Smith monitor)
CISA RS232 PRINTER-DRIVER
Operate any RS232 or 20MA serial printer with this Australian made unit. Includes software...\$54.75
LOWER CASE MODIFICATION
Get video lower-case for BOTH Scripsit and Electric Pencil. Fitted.....\$49.95
VIDEO STABILISER CRYSTAL
Totally removes shimmer and wobble on your video. Highly recommended for Green Tube.

Kit.....\$19.95
Fitted.....\$39.95
DUMMY PRINTER
Plug this into the parallel port of the interface and avoid system lockups if you accidentally type LLIST or LPRINT.....\$14.95

TRS-80 SOFTWARE

AIR TRAFFIC CONTROLLER L2/16K
Supervise a large area of air-space in real time.....\$9.95
SPACE GAMES L2/16K
Five brilliant games in the classic space series.....\$14.50
STRATEGY GAMES L2/16K
Four fascinating games to test your judgement and logic.....\$14.50
ADVENTURE SERIES L2/16K
Adventure-1, The Count, Voodoo Castle.
Each.....\$14.95
Z-CHESS
A fast and exciting opponent. 6 levels of play.
L2/16K.....\$19.95
Disk 32K.....\$24.95
DISASSEMBLER IN BASIC L2/16K only
Disassembles ROM and high memory machine language routines.....\$9.95
TAPECHECK L2 16K plus
Checks and verifies every millimetre of a cassette tape. Also useful as cassette I/O diagnostic.....\$9.95
RS232 DIAGNOSTIC 32K/DISK
Interrogates, tests and reports on EVERY feature of Tandy RS232 board.....\$19.95
FLOPPY DOCTOR 32K/DISK
This is the most comprehensive and exacting series of memory and disk I/O tests we have seen.
From Micro-Clinic, USA.....\$29.95
SIMUTEK 7 separate packages
These seven packages are excellent value for any TRS-80 owner.....\$14.95 ea.
Plus many, many more.

"HISPED" TAPE OPERATION

2K Baud PLUS for the TRS-80*

- Save, verify and load programs up to 4 times faster than normal
 - Save, verify and load array data up to 30 times faster than PRINT
 - User variable hardcopy formatting (3 output routines work with most printers)
 - "HISPED" is a machine language program (not a hardware add-on)
 - 2 copies plus a free basic test program supplied on high quality cassette — for level 2, 16K, 32K or 48K.
- MAKES STRINGY FLOPPIES REDUNDANT.

\$24.95

Available only from Cisa and authorised agents.

MICROPOLIS DRIVES FOR THE TRS-80*

For the enthusiast: 192K bytes per drive.
SINGLE 77 TRACK.....\$699.00
A professional disk drive for the business user:
TWIN 77 TRACK 385K.....\$1499.00
Both complete with heavy-duty case and inbuilt power supply and free dospatch to TRSDOS.
Requires cables — 2 drive \$30, 3 drive \$40, 4 drive \$50.
MIX 'N MATCH with any 35 or 40 track drive.
**SHOP WHERE YOU CAN BE SURE OF SERVICE
BACK-UP AND YOUR WARRANTIES HONOURED.**

SOFTWARE FROM RACET

INFINITE BASIC \$49.95 L2 and DISK
Add 30 BASIC commands plus full MATRIX MANIPULATION.
Add 50 STRING functions, including high-speed sorts.
BUSINESS BASIC (requires INFINITE BASIC).....\$29.95
Another 20 functions including set printer parameters, 127 digit mathematical functions, binary array searches and hash code generator.
COMPROC Command Processor for Disk.....\$19.95
Auto your system to any sequence of DOS, machine-language or BASIC routines. Includes screen-print, auto debounce and lower-case software driver.
DSM Disk Sort and Merge Min 32K and Disk.....\$75.00
Sorts 85K diskette in less than 3 minutes.
Sorts 190K diskette in less than 6 minutes.
COPYSYS for cassette systems.....\$14.95
Copy and verify virtually any machine-language program.
GSF 32K and 32K DISK.....\$34.95
18 high-speed machine-language routines including high-speed in-memory sorts.
Sorts a 1,000 element string array in 6 seconds.

PHONE OR CALL AND BROWSE. TRADE ENQUIRIES INVITED

Trading Hours: 9am to 6pm Monday-Friday, 9am to 12.30pm Saturday.

All the above fine products are available at or can be ordered from:

SOFTWARE-80, Shop 11/198 Moggill Road, Taringa, Brisbane, QLD
4000. Phone: (07) 371-6996.
SOUTH COAST COMPUTING SERVICES, 90 Worrigea Street, Nowra,
NSW. 2540. Phone: (044) 24967.
THE BYTE SHOP, Colbee Court, Phillip, ACT, 2606. Phone: (062) 81-5011.

H.S. ELECTRONICS, 104 Charles Street, Launceston, TAS, 7520.
Phone: (003) 31-8942.
WACB RADIO CENTRE, 129 Fitzgerald Street, Perth, WA.
TANDY ELECTRONICS, Springers Arcade, Bowral, NSW, 2576.
Phone: (048) 91-2092.

CISA MICROCOMPUTING PTY. LTD.

159 KENT STREET, SYDNEY, NSW 2000. PHONE: (02) 241-1813.

Orders under \$100 add \$2.00 p and p. Over \$100 post free. For repairs and mods to systems — send by carrier — you pay, we pay return carriage.

Designing potcore inductors

Potcores offer many advantages when you need to use an inductor in a circuit. This article details a simplified design method for two common potcore sizes based on a nomograph.

FERRITE POTCORES are widely used in the construction of small inductors and transformers. However very few amateurs know how to choose a core appropriate to their needs, or how to wind a coil of specific inductance.

This article describes a simple method of designing coils for low frequency applications. The design of coils for high frequency applications, and of transformers, is beyond the scope of this article. Design details given apply only to the Philips 'P' series of pot cores and more particularly to the 18 mm (P18/11) and 26 mm (P26/16) diameter cores which are the most commonly available.

Each core size is available in four different ferrite materials (3H1, 3B7, 3D3, 4C6) to cover the frequency range from audio to about 20 MHz. Additionally each material, in each size, is available with a number of permeabilities to cover different inductance, stability and Q factor requirements.

There are two factors commonly used to classify ferrite cores. These are effective permeability (μ_e) and A_L factor.

The μ_e factor is primarily determined by the permeability of the material used and its cross sectional area, and secondly by the air gap left between the centres of the two core halves. For example an 18 mm 3B7 core without any air gap (type 0 4000) has a μ_e of 1750 and a tolerance on inductance of $\pm 25\%$. The use of increasingly larger air gaps in the same core size and material lowers the μ_e but increases the stability and reduces the tolerance on inductance.


A second factor in common usage is A_L . This factor gives, in nanohenries, the inductance of ONE turn on the core. The inductance of N turns on the core is

$$L = N^2 A_L \times 10^{-3} \text{ millihenries}$$

The selection of a core size, a core material, a permeability value, a wire size and the number of turns depends on all the following factors:-

- inductance, stability of inductance
- frequency range
- Q factor
- unbalanced dc coil current
- level of ac coil current

Choosing the correct core taking *all* these factors into account is a difficult task indeed. However a large number of

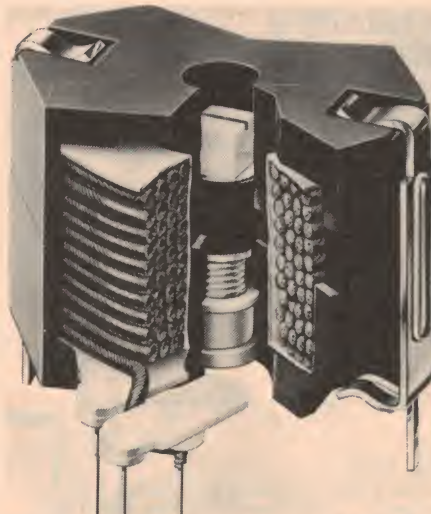

Cutaway view of a potcore showing the winding on the internal bobbin and the inductance adjustor in the centre. The ferrite 'pot' comes in two halves, held together with a clip.

core types are eliminated by first selecting in accordance with frequency range and stability.

Frequency range

Firstly select the core material from Table 1 in accordance with the desired frequency range. To choose between 3H1 and 3B7 it is necessary to consider temperature stability.

If the tuning capacitors associated with the coil have small or varying temperature coefficients, a 3B7 core should be used as they have the lowest temperature coefficient in the range $0^\circ - 70^\circ\text{C}$. Alternatively, if using polystyrene capacitors (temp. coeff. $-150 \text{ ppm}/^\circ\text{C}$) a 3H1 core having an effective permeability (μ_e) around 150 will give excellent temperature compensation for the temperature coefficient of these capacitors.

Inductance stability

Since the inductance of a coil is

TABLE 1	
FREQUENCY RANGE	CORE TYPE
0.1 — 200 kHz	3B7, 3H1
200 kHz — 2 MHz	3D3
2 MHz — 20 MHz	4C6

proportional to core permeability, the change of effective permeability (μ_e) with temperature determines the stability of inductance.

The percentage change of inductance with temperature is linearly proportional to μ_e and hence low μ_e cores should be used for greatest stability. Stability is therefore obtained at the expense of inductance obtainable with a given core size.

The temperature effect is not large enough to affect any but the most critical of applications and the tolerance on inductance as stated in Tables 2 and 3 will be obtained over the temperature range $+15^\circ$ to $+35^\circ\text{C}$.

Direct current

A direct current in the winding will change the inductance value of the core and if large enough, could cause saturation. In general, large air gaps, and hence lower permeability (μ_e), cores should be used where large dc currents are flowing.



Q factor

The Q of a coil is influenced by different factors at different frequencies.

At frequencies below 10kHz it is almost completely determined by the dc resistance of the winding. The Q factor of any given coil increases linearly with frequency, and the larger the core, the larger the Q. The highest Q factors are obtainable by using gapless cores of 3H1 or 3B7 material (providing that tolerance and stability are acceptable) eg. 04000 series (P18/11) and 08000 series (P26/16).

Throughout the ultrasonic range core and winding losses affect Q, but Q factors of several hundred may still be obtained by optimum choice of wire and core, such that core and winding losses are equal. For further information, on optimum design, reference should be made to Philips Data Handbook — Components and Materials, Vol. 4.

At higher ultrasonic and lower radio frequencies, additional factors of dielectric and skin-effect losses and parallel winding capacitance, all affect Q, making exact design difficult. Use of Litz wires, split section formers and small cores with low μ_e values will assist.

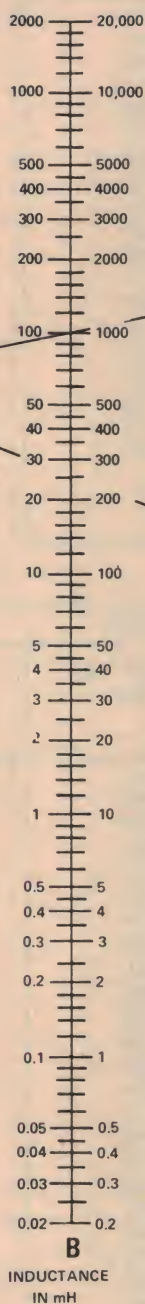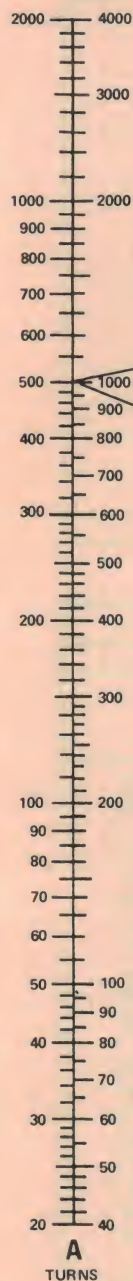


TO USE



THIS CHART MAY BE USED TO DESIGN INDUCTORS USING PHILIPS P18/11 OR P26/16 POTCORES. FOR P18/11 CORES (18mm DIA) USE THE FIGURES ON THE LEFT OF THE SCALES, AND FOR P26/16 CORES (26mm DIA) USE THE FIGURES ON THE RIGHT. NOTE THAT ON SCALE E μ e VALUES ARE GIVEN IN BRACKETS WHEREAS AL FIGURES ARE UNBRACKETED.

FOR EXAMPLE, ASSUME WE REQUIRE A 100mH INDUCTOR ON A P18/11 CORE HAVING AN AL OF 400. LAY A RULER BETWEEN 100mH ON THE LEFT OF SCALE B AND AN AL OF 400 ON THE LEFT OF SCALE E. THIS LINE, PRODUCED TO SCALE A, SHOWS US THAT WE NEED 500 TURNS.

FROM THE TABLE SHOWING MAXIMUM TURNS ON A P18/11 CORE WE FIND THAT ONLY 480 TURNS OF 0.16mm WIRE WILL FIT AND WE THEREFORE MUST USE THE NEXT SMALLEST GAUGE OF 0.125mm. A LINE FROM 500 TURNS ON THE LEFT OF SCALE A THROUGH 0.125mm ON THE LEFT OF SCALE C, WHEN PRODUCED TO SCALE D, SHOWS US THAT THE COIL WILL HAVE A RESISTANCE OF 24 OHMS.

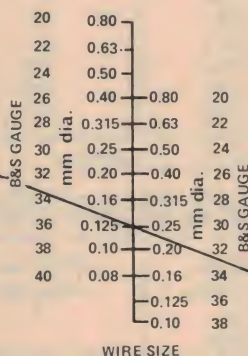

WIRE SIZE		MAXIMUM TURNS P18/11		
mm	B&S	SINGLE FORMER	DOUBLE FORMER	TRIPLE FORMER
0.80	20	21	19	17
0.63	22	33	30	27
0.50	24	51	47	43
0.40	26	80	75	58
0.315	28	126	117	108
0.25	30	197	182	168
0.20	32	315	278	255
0.16	34	480	446	410
0.125	36	751	699	642
0.10	38	1169	1089	1002
0.08	40	1945	1811	1666
WIRE SIZE		MAXIMUM TURNS P26/16		
mm	B&S	SINGLE FORMER	DOUBLE FORMER	TRIPLE FORMER
0.80	20	46	43	41
0.63	22	73	68	65
0.50	24	114	107	101
0.40	26	180	169	161
0.315	28	282	265	251
0.25	30	441	415	395
0.20	32	671	630	597
0.16	34	1075	1012	958
0.125	36	1686	1585	1501
0.10	38	2625	2468	2338

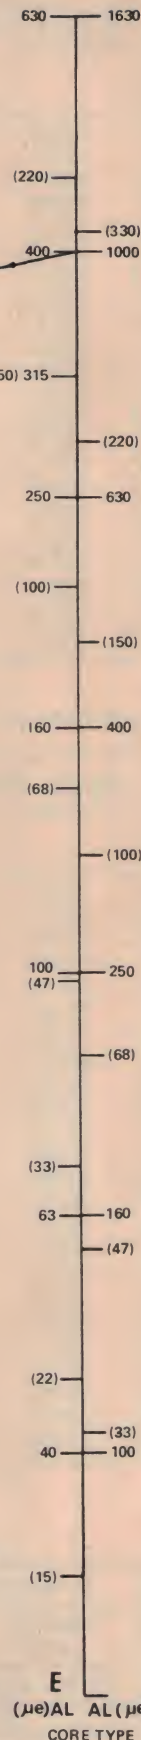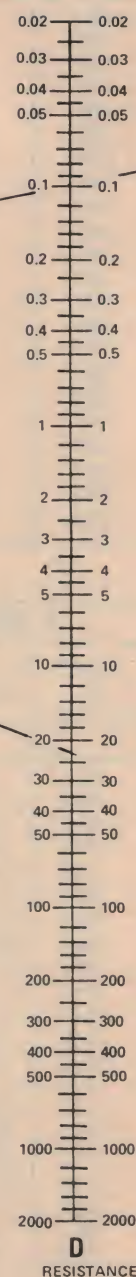

© Nomograph copyright
Electronics Today International

Reprints of this article on quality, heavy grade paper are available from the magazine for \$2.50 each post paid. Make out your cheque or money order to ETI/Modern Magazines and send your order to "Designing Potcore Inductors Reprint", Electronics Today International, 15 Boundary St, Rushcutters Bay NSW 2011.

Table 2 P18/11 Potcores

A. PRE-ADJUSTED PAIRS WITH STANDARD μ_e VALUES						
catalogue number 4322.022 ...	grade of ferroxcube	effective permeability (μ_e)	number of turns for 1 mH α	tolerance on inductance %	adjustor type 4322.021	adjustor colour
28030	3B7	33	98.2	± 1	30780	green
28040	3B7	47	82.3	± 1	30800	red
28050	3B7	68	68.4	± 1	30980	white
28060	3B7	100	56.4	± 1.5	30980	white
28070	3B7	150	46.1	± 2	30810	brown
28080	3B7	220	38.1	± 3	30810	brown
28090	3B7	330	31.0	± 3	31090	grey
28230	3H1	33	98.2	± 1	30780	green
28240	3H1	47	82.3	± 1	30800	red
28250	3H1	68	68.4	± 1	30980	white
28260	3H1	100	56.4	± 1.5	30980	white
28270	3H1	150	46.1	± 2	30810	brown
28280	3H1	220	38.1	± 3	30810	brown
28290	3H1	330	31.0	± 3	31090	grey
28430	3D3	33	98.2	± 1	30780	green
28440	3D3	47	82.3	± 1	30800	red
28450	3D3	68	68.4	± 1	30980	white
28810	4C6	15	146	± 1	30780	green
28830	4C6	33	98.2	± 1	30790	yellow
08000	3B7	1910.0	12.9	± 25	—	—
08200	3H1	1910.0	12.9	± 25	—	—
08400	3D3	730.0	20.8	± 25	—	—

$$N = \alpha \sqrt{L} \quad (L \text{ in } 10^{-3} \text{ H})$$

B. PRE-ADJUSTED PAIRS WITH STANDARD AL FACTORS						
catalogue number 4322.022 ...	grade of ferroxcube	AL factor	corres- ponding μ_e value	tolerance on inductance %	adjustor type 4322.021	adjustor colour
29030	3B7	63	20	± 1	30780	green
29040	3B6	100	31.8	± 1	30780	green
29050	3B7	160	51	± 1	30800	red
29060	3B7	250	79.5	± 1	30980	white
29070	3B7	315	100.2	± 1.5	30980	white
29080	3B7	400	127	± 2	30810	brown
29100	3B7	630	200	± 3	30810	brown
29110	3B7	1000	318	± 3	31090	grey
29120	3B7	1600	510	± 3	31090	grey
29230	3H1	63	20	± 1	30780	green
29240	3H1	100	31.8	± 1	30780	green
29280	3H1	160	51	± 1	30800	red
29260	3H1	250	79.5	± 1	30980	white
29270	3H1	315	100.2	± 1.5	30980	white
29280	3H1	400	127	± 2	30810	brown
29300	3H1	630	200	± 3	30810	brown
29310	3H1	1000	318	± 3	31090	grey
29320	3H1	1600	510	± 3	31090	grey
29430	3D3	63	20	± 1	30780	green
29440	3D3	100	31.8	± 1	30780	green
29450	3D3	160	51	± 1	30800	red
29460	3D3	250	79.5	± 1	30980	white
29830	4C6	63	20	± 1	30780	green
29840	4C6	100	31.8	± 1	30790	yellow

$$L = N^2 AL \quad (10^{-9} \text{ H})$$

C. COILFORMERS	
catalogue number	number of sections
4322.021.30330	1
4322.021.30340	2
4322.021.30350	3
4322.021.30130	1 with pins
4302.021.20030	1 with pins

D. MOUNTING PARTS	
catalogue number	description
4322.021.30550	container
4322.021.30660	spring
4322.021.30470	tag plate
4322.021.30710	nut
4322.021.30720	bush
4302.021.20020	clip

Inductance

The tolerance given on inductance, in Tables 2 and 3 is obtained when using the specified core, and a wire size that will completely fill the former close layer wound. Due to slight changes in wire diameter and different methods of winding, the exact number of turns accommodated may vary by $\pm 10\%$.

Table 3 P26/16 Potcores

A. PRE-ADJUSTED PAIRS WITH STANDARD μ_e VALUES						
catalogue number 4322.022	grade of ferroxcube	effective permeability (μ_e)	number of turns α	tolerance on inductance %	adjustor type number 4322.021 . . .	adjustor colour
24030	3B7	33	120	± 1	30760	green
24040	3B7	47	100.5	± 1	30770	red
24050	3B7	68	83.6	± 1	30960	yellow
24060	3B7	100	68.9	± 1.5	30970	white
24070	3B7	150	56.3	± 2	30730	brown
24080	3B7	220	46.5	± 3	31080	grey
24230	3H1	33	120	± 1	30760	green
24240	3H1	100.5	100.5	± 1	30770	red
24250	3H1	68	83.6	± 1	30960	yellow
24260	3H1	100	68.9	± 1.5	30970	white
24270	3H1	150	56.3	± 2	30730	brown
24280	3H1	220	46.5	± 3	31080	grey
24430	3D3	33	120	± 1	30760	green
24440	3D3	47	100.5	± 1	30770	red
24450	3D3	68	83.6	± 3	30960	yellow
24810	4C6	15	178	± 1	30760	green
24820	4C6	22	147	± 1	30770	red
24830	4C6	33	120	± 1	30970	white
04000	3B7	1750	16.5	± 25	—	—
04200	3H1	1750	16.5	± 25	—	—
04000	3D3	705	25.9	± 25	—	—

$$N = \alpha \sqrt{L} \text{ (L in } 10^{-3} \text{ H)}$$

B. PRE-ADJUSTED PAIRS WITH STANDARD AL FACTORS						
catalogue number 4322.022	grade of ferroxcube	AL factor	corres- ponding μ_e value	tolerance on inductance α	adjustor type 4322.021 . . .	adjustor colour
25030	3B7	63	30	± 1	30760	green
25040	3B7	100	47.5	± 1	30770	red
25050	3B7	160	76	± 1	30960	yellow
25050	3B7	250	119	± 1.5	30970	white
25070	3B7	315	149	± 2	30730	brown
25080	3B7	400	190	± 2	31080	grey
25100	3B7	630	298	± 3	31080	grey
25230	3H1	63	30	± 1	30760	green
25240	3H1	100	47.5	± 1	30770	red
25250	3H1	160	76	± 1	30960	yellow
25260	3H1	250	119	± 1.5	30970	white
25270	3H1	315	149	± 2	30730	brown
25280	3H1	400	190	± 2	31080	grey
25300	3H1	630	298	± 3	31080	grey
25420	3D3	40	19.0	± 1	30760	green
25430	3D3	63	30	± 1	30760	green
25440	3D3	100	47.5	± 1	30770	red
25450	3D3	160	76	± 1	30960	yellow
25810	4C6	25	11.9	± 1	30760	green
25820	4C6	40	19.0	± 1	30770	red
25830	4C6	63	30	± 1	30970	white

Hence it is safer, when winding experimental coils, to only try and fit 90% of the turns indicated in the maximum number of turns tables.

If the former is only partly filled, errors up to 4% may occur with the lower μ_e cores. However the use of an adjustor will allow a +10% adjustment range which is generally sufficient to cope with tolerances found in practical circuits.

When optimum stability is required the type of adjustor that matches a certain core should be used. If it is desired to widen the adjustable range,

at the possible expense of stability, an adjustor indicated for a potcore with a high μ_e value may be used with a potcore of low μ_e value.

C. COIL FORMERS	
catalogue number	number of sections
4322.021.30270	1
4322.021.30280	2
4322.021.30290	3
4322.021.30090	1 with pins
4302.021.20010	1 with pins

C. MOUNTING PARTS	
catalogue number	description
4322.021.30530	container
4322.021.30640	spring
4322.021.30450	tag plate
4322.021.30710	nut
4322.021.30720	bush
4302.021.20000	clip

Design data for this article has been derived from the Philips publication "Ferroxcube Potcores", 1972. Nomograph copyright — Electronics Today International. This article was originally published in the October 1974 issue of ETI, Australian edition.

ELLISTRONICS

289 LATROBE ST. MELBOURNE. 3000
PHONE (03) 602-3282, 602-3836. TELEX AA37758 LSTRON.

YES! WE ACCEPT BANKCARD. All prices valid month of issue. Heavy items sent Comet freight forward. Minimum post \$3.00.

ADDITIONAL FREIGHT REQUIRED FOR HEAVY ITEMS.

OUR LOWEST PRICES EVER! RUSH FOR THESE FULL SPEC. PRIME I.C.'s WHILE STOCKS LAST

2716. 450ns Single 5v Supply.....	\$11.95 ea.
2716. 200ns Single 5v Supply.....	\$19.50 ea.
2114. 450ns	\$2.95 ea.
2114. 300ns	\$3.90 ea.
2708. 450ns	\$6.40 ea.
4116. 200ns	\$4.90 ea.

Z80 C.P.U.....	\$10.81 ea.
Z80A C.P.U.....	\$11.14 ea.
Z80 C.T.C.....	\$11.44 ea.
Z80 P.I.O.....	\$6.65 ea.
Z80A P.I.O.....	\$8.57 ea.
Z80 SIO/O	\$38.67 ea.
Z80A SIO/O	\$49.90 ea.
Z80 SIO/1	\$38.67 ea.
Z80A SIO/1	\$49.90 ea.
Z80 SIO/2	\$38.67 ea.
Z80A SIO/2	\$49.90 ea.
Z80 SIO/9	\$38.67 ea.
Z80A SIO/9	\$49.90 ea.

2732.....	\$66.00 ea.
MB 8414 (2114 CMOS 250ns).....	\$21.00 ea.
65 x 08 1k x 1 CMOS.....	\$9.00 ea.

FLOPPY DISC CONTROLLERS

FD 1771.....	\$37.00 ea.
FD 1791.....	\$62.00 ea.
FD 1793.....	\$62.00 ea.

8 BIT MPU's

6802.....	\$11.80 ea.
6808.....	\$10.50 ea.
6809.....	\$46.77 ea.
6821.....	\$5.10 ea.
6840.....	\$7.84 ea.
6845.....	\$38.94 ea.
6847.....	\$28.00 ea.
6850.....	\$4.40 ea.
6852.....	\$5.50 ea.

RISTON 3000 COATED FIBREGLASS BOARD SINGLE SIDED

6" x 3".....	\$1.60 ea.
6" x 6".....	\$2.30 ea.
9" x 6".....	\$3.35 ea.
12" x 12".....	\$7.95 ea.
DOUBLE SIDED	
6" x 3".....	\$2.30 ea.
6" x 6".....	\$3.30 ea.
9" x 6".....	\$4.10 ea.
12" x 12".....	\$9.45 ea.

Full range of chemicals available.

ALL PRICES PLUS 15 PERCENT SALES TAX APPLICABLE.



JUST WRAP™

- 30 AWG wire
- 0.025" square posts
- Daisy chain or point-to-point
- Built-in cut off
- No stripping or slitting required—just wrap
- Includes 50 ft. wire

JW-1-B	Blue	\$19.30 each
JW-1-W	White	
JW-1-Y	Yellow	
JW-1-R	Red	

JUST WRAP™ Replacement Wire


Part No.	Color		
R-JW-B	Blue	50 ft. roll	\$4.42 each
R-JW-W	White	50 ft. roll	
R-JW-Y	Yellow	50 ft. roll	
R-JW-R	Red	50 ft. roll	

JUST WRAP™ Unwrap Tool \$3.81



JUST WRAP™ Kit • 50 ft. ea.: blue, white, red, yellow wire
• JUST WRAP Tool • Unwrapping Tool

JWK-6..... \$32.15

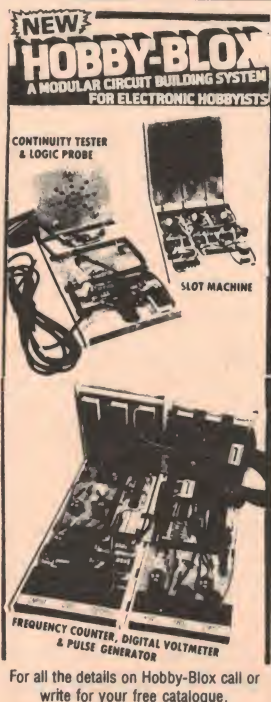


NEW! HOBBY-BLOX
A MODULAR CIRCUIT BUILDING SYSTEM FOR ELECTRONIC HOBBYISTS

CONTINUITY TESTER & LOGIC PROBE

SLOT MACHINE

FREQUENCY COUNTER, DIGITAL VOLTMETER & PULSE GENERATOR

For all the details on Hobby-Blox call or write for your free catalogue.



NEW!

SOAR corporation

ME-501A

From \$69.00

Prices plus 15 percent sales tax.

ME-501B Same as ME-501A plus continuity checker.

SPECIAL PRICES ON PROJECT BOXES

UB1 \$1.69 plus 25c tax	150 x 90 x 50mm
UB2 \$2.56 plus 38c tax	186 x 113 x 60mm
UB3 \$1.35 plus 21c tax	130 x 68 x 41mm
UB5 81c plus 12c tax	83 x 54 x 28mm
Plus 15 percent tax.	

V-151 15 MHz Single Trace
V-152 15 MHz Dual Trace
V-301 30 MHz Single Trace
V-302 30 MHz Dual Trace
V-550B 50 MHz Dual Trace,
Dual Time Base

Call For Special Intro Price Offer





AUSTRALIAN MADE WELLER SP25D MARKSMAN

Mains voltage constant heat 25 watt with 5/32 tip (lightweight 185 grams). Made in Australia Weller gives you better value in soldering irons than most imported irons. Fully guaranteed.

\$9.75 ea.
TAX EXEMPT

SPECIAL FOR THIS MONTH AT ONLY \$54.50 ea.

WELLER WTCPN SERIES

TAX EXEMPT

LOW VOLTAGE, TEMPERATURE CONTROLLED SOLDERING STATION

A transformer powered soldering station, complete with a low voltage, temperature controlled soldering pencil. The special Weller "closed loop" method of controlling maximum tip temperature is employed, thereby protecting temperature sensitive components while the grounded tip protects voltage and current sensitive components. The soldering pencil features a stainless steel heater construction, a non-burning silicon rubber cord and a large selection of iron plated tips in sizes from .8 mm diameter to 6 mm diameter with a choice of tip temperature of 600°F/315°C, 700°F/370°C and 800°F/430°C.

A redesigned transformer case features an impact-resistant noryl for durability and protection against accidental damage, a quick connect/disconnect plug for the soldering iron, extra large wiping sponge, tip tray to store extra tips, plus an improved off-on switch with a long-life neon indicator light, a non-heat sinking soldering pencil holder and a 2 m flexible 3-wire power cord.

The soldering iron is normally provided with a PTA7-1.6 mm screwdriver 700°F/370°C tip.

SPECIFICATIONS

Power Unit • Power input 240 Volts 50 Hz 60 Watts Int. • Transformer Output Voltage — 24 Volts (Full Load)

• Power Unit Size — 113mm x 187.3mm x 92mm • 2 Metres, 3 Wire Power Cord.

Soldering Pencil • Soldering Pencil Wattage — 48 Watts • Tip Voltage *To Ground .01 Volts P-P • Pencil Weight — 50 gram (W/O Cord) • Recovery Time (From 100°F Drop) W/PTA7 Tip = 11 Sec.



S2010 PVC weatherproof re-entrant horn/speaker. Very attractive "off white" colour. 8 ohm 5 Watt RMS. Ideal P.A. use. Individually boxed.

SPECIAL PRICE \$5.95 ea.
exempt
\$6.84 inc. tax

Ellistronics are direct distributors for Weller, Hitachi and Trio. For quantity discounts etc. ask for Trade Division.



Prices plus
15 percent sales tax.

TOP QUALITY LOW COST TRANSFORMERS

R-2150-2851

Primary: 240V AC.
Secondary Voltage: 12.6 volts CT.
Secondary Current: 150mA.
Termination: Flying leads.

\$2.50 ea. 10 up \$2.10 ea.

R-2155

Primary: 240V AC.
Tapped Secondary Voltages: 6.3, 7.5, 8.5,
9.5, 12.6, 15.

Secondary Current: 1 amp.
Termination: Solder lugs on transformer.
\$3.90 ea. 10 up \$3.51 ea.

R-6672

Primary: 240V AC.
Tapped Secondary Voltages: 15, 17.5, 20,
24, 27.5, 30.

Secondary Current: 1 amp.
Termination: Solder lugs.
\$6.19 ea. 10 up \$4.95 ea.

S2000 8" (200mm) wide range general purpose. Includes transformer, mounting holes for P.A. and background use. Very smooth over-all response 45 Hz-12 KHz. Fitted to a 1.9 cubic ft vented enclosure they sound unbelievable.
8 Ohm 8 Watt RMS 5.6 oz magnet.
\$6.00 TRADE, \$6.95 inc. tax



EXTRA SPECIAL

2N 3055 TRANSISTORS
FULL SPEC. MOTOROLA

55c ea. plus 15c tax

MJ 2955 TRANSISTORS

65c ea. plus 18c tax

TEXAS INSTRUMENTS CALCULATORS



Ti 25	\$19.04
Ti 30 SP	\$22.85
Ti 50	\$38.09
Ti 55	\$54.09
Ti 58C	\$141.50
Ti 59	\$295.00
PC-100C	\$215.00
(Printer/Plotter for Ti 58C and Ti 59)	

Speak and Spell	\$77.78
Dataman	\$24.26
Little Professor	\$17.62
AC9131 AC Adaptor/Charger for Ti 58C/59	\$7.06

Calculators plus 15 percent sales tax if applicable. Full range of calculators and accessories in stock.

DIRECT IMPORT PANEL METERS AT LOW, LOW PRICES



MU-65 1MA — 120 ohms
100uA — 1400 ohms

Dimensions: Overall — 100mm(W) x 82mm(H)

Scale — 100mm(W) x 50mm(H)

Mounting: Hole required — 63mm

Bolt centres — 80mm(W) x 64mm(H)

Nuts and washers provided

\$10.18 ea. plus \$1.52 tax



MU-45

O-1MA-120 ohms

O-50UA-1400 ohms

O-5ADC-3 Shunt

O-30VDC-100 ohms

\$6.45 ea.

plus 97c tax

MU-45 VU

METER

VU (OdB equals 1mW

into 600ohms)

— 1,000ohm

\$7.35 ea.

plus \$1.11 tax

MU-45 DIMENSIONS

Overall — 58mm(W) x 52mm(H)

Scale — 58mm(W) x 31mm(H)

Hole required — 44mm

Bolt centres — 38mm(W) x 38mm(H)


Nuts and washers provided

10 or more less 10 percent

Ideas for Experimenters

These pages are intended primarily as a source of ideas. As far as reasonably possible all material has been checked for feasibility, component availability etc, but the circuits have not necessarily been built and tested in our laboratory. Because of the nature of the information in this section we cannot enter into any correspondence about any of the circuits, nor can we produce constructional details.


LED chaser

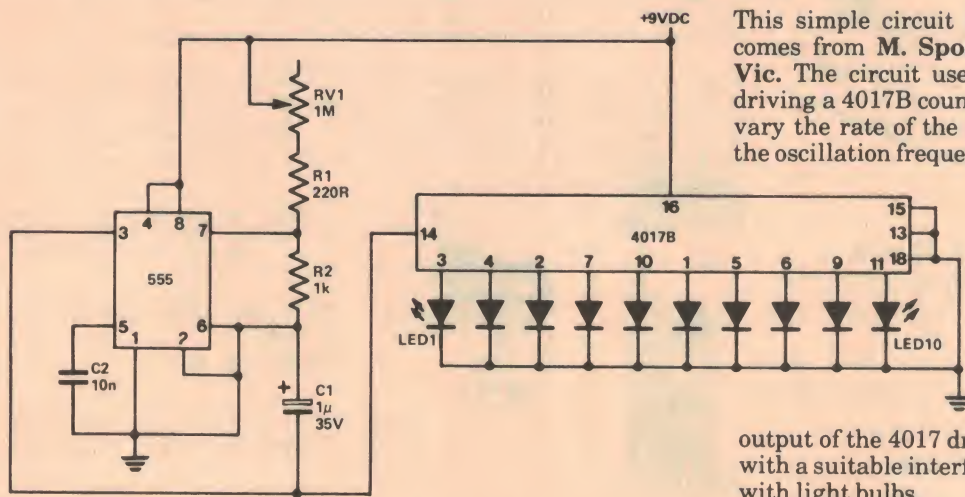

This simple circuit for a LED chaser comes from M. Spokes of Glen Iris, Vic. The circuit uses a 555 oscillator driving a 4017B counter. RV1 is used to vary the rate of the chaser by varying the oscillation frequency of the 555. The

output of the 4017 drives ten LEDs, but with a suitable interface it could be used with light bulbs.

Mods to the ETI-152 Capacitance Meter

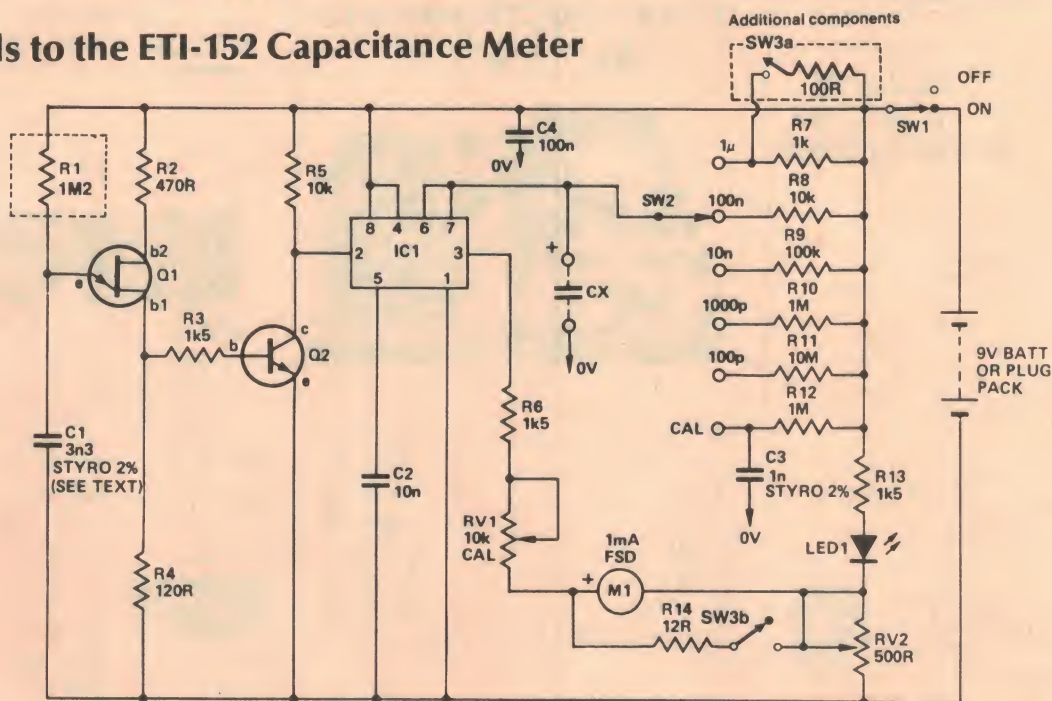


This project appeared in the February 1980 issue and was part of a short series of look-alike test instruments. Several readers pointed out that the unit did not work properly in the $1\mu/x10$ mode (i.e: 10μ full scale) as the integration time was not long enough. This problem is cured by a simple modification.

Firstly, SW3 should be changed to a double-pole, single-throw (DPST) type. Secondly, change R1 to 1M2, as shown in the new circuit diagram here. Add a 100 ohm resistor, switched across R7 by the other pole of SW3, as shown in the circuit diagram.

That should correct the problem.

Apart from that, some constructors found that RV2 (zero set control) was very close to one end of its range and difficult to adjust. This is probably brought about by LED1 having a fairly high voltage drop. To cure the problem, reduce R13 to 820 or 680 ohms.

PURCHASED AT BELOW COST!



SANYO DOLBY™ DECK \$115

**Similar decks sold
for over \$200
two years
ago!!!**

(& they didn't have LED level
displays!!!)

**WE BELIEVE IT'S
AUSTRALIA'S
BEST VALUE
DOLBY
DECK**

**MASSIVE
SAVINGS
ON
NORMAL
PRICE!**



**\$6.00
BELOW COST
FREIGHT
ANYWHERE IN
AUSTRALIA!**

**FANTASTIC
VALUE!**

NOW AVAILABLE FROM DICK SMITH

Fantastic but true. We have purchased large stocks of the famous SANYO brand RD.5008 Stereo Cassette deck - below manufacturer's cost! This means that we can pass genuine savings on a quality cassette deck on to you. The manufacturer's loss is your gain - **YOU REAP THE BENEFIT!!!**

Be early - Stocks limited. Whilst we have purchased a large quantity, we expect demand to be brisk. So if you want to purchase one of these decks we suggest that you call in without delay. If, for some reason you cannot call in immediately please, please phone your nearest store to check the stock situation. We hate to tell customers that we have sold out after they have made a long journey only to be disappointed...

While you're in one of our stores

Have a look around. Play with the fascinating 'gizmos' that we sell. Not only do we sell cassette decks but many interesting items including hi-fi equipment & accessories, CB & Amateur radio equipment, home computers & peripherals, home & car alarms, car accessories & hi-fi, computer games, antennas, components etc etc. In fact, we have almost everything for the electronic enthusiast - from kits to computers!

YOU REAP THE BENEFIT!

Check these features:

- Special 'Solid State' LED VU meters in place of the old style mechanical meters. Gives rapid easy-to-read level indication for easy recording level adjustments
- Dolby noise reduction to suppress annoying tape hiss. Improves signal to noise ratio by up to 10dB!
- DC motor. This ensures extra tape transport stability reducing wow & flutter to less than 0.1% RMS!
- Permalloy record/playback head. This means wider frequency response, lower distortion & longer head life
- Full auto stop. This saves wear & tear on the deck & reduces 'stretch' in your valuable tapes!
- CrO₂ /Normal selector switch
- Modern front-loading design. This allows you to stack your hi-fi as well as reduce the likelihood of dust entering the mechanism
- Oil-damped cassette door. This causes the lid to open & close silently without 'slamming'
- Other features. Separate right/left level controls plus 3 digit re-settable tape counter

**ACT NOW
While stocks last!**

Easy
terms available to
approved applicants

**DICK SMITH
Electronics**



**SEE OUR OTHER ADS FOR
FULL ADDRESS DETAILS**

archive

COMPUTER SERVICES

P.O. Box 13 Clayfield, 4011, Queensland, Australia. Ph (07) 2622615



THE FINEST SOFTWARE OF ITS KIND

malibu

Electronics Corporation

Reconditioned 160 Malibu \$2,200
New 165 Malibu with stand \$3,640
Apple Version \$3,360

	Complete	Manual Only
Wordstar	\$445	\$45
MailMerge for Wordstar	\$145	\$30
Wordstar with MailMerge	\$575	\$75
Data Star	\$325	\$40
Word Master	\$145	\$30
SuperSort 1	\$225	\$30
SuperSort 2	\$175	\$30

* Manual only purchases fully credited to later software purchase



FINEST QUALITY DISKS PACKED 10 PER LIBRARY BOX

5 1/4" \$45 per box
8" \$50 per box

Specify Soft or no. of sectors

ALL PRICES INCLUDE SALES TAX WHERE APPLICABLE

OSBORNE & ASSOCIATES, INC.

Osborne Software requires C Basic 2

OSBORNE SOFTWARE

General Ledger \$50
A/R, A/P \$60
Manuals \$30 each
C Basic 2 \$100 with Manual

SEND FOR OUR LATEST CATALOGUE including tax free prices, new and used specials



ARCHIVES BUSINESS COMPUTER

We can supply a complete Hardware/Software package customized to your individual requirements.

MOST ITEMS IN STOCK

Trademark of Digital Research


CP/M

WE SELL MOST CP/M SOFTWARE
User Group - 44 Vol.
\$12 ea.

THE ULTIMATE PRINT QUALITY FOR WORD PROCESSING AND BUSINESS APPLICATIONS

55 c.p.s. Bidirectional printing and paper motion
Proportional spacing, Quick change print thumbnails & ribbons
High Res. plotting and graphing

R/C S100 Version including S100 I/O Board \$3,378
Buy Wordstar at same time & save \$100 - \$3,278

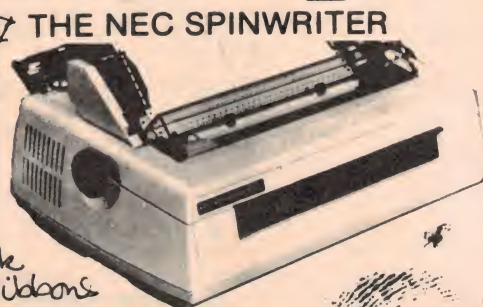


Ideas for Experimenters

'Endless' LED chaser

This unusual LED or lamp chaser employs a 'chain' of inverter stages connected in a ring. The portion of the circuit inside the dotted box is repeated as many times as you wish, the collector of the transistor in each stage going to the input capacitor of the following stage and so on. Finally, the circuit arrives at SW1 and SW2 and the stage involving IC1b, Q2 etc.


According to **Greg Thamm of Burra North, S.A.**, who submitted it, the whole thing works like this: after applying power, close SW2 until all the LEDs go out. Then, open SW2 and momentarily close SW1 (a pushbutton could be used here). This starts the chaser as the collector of the transistor connected to C2 will be at supply potential, Q2 will turn on and LED2 will light when you close SW1. However, C2 will charge via the LED and dropping resistor of the preceding stage until the input to IC1b goes below its

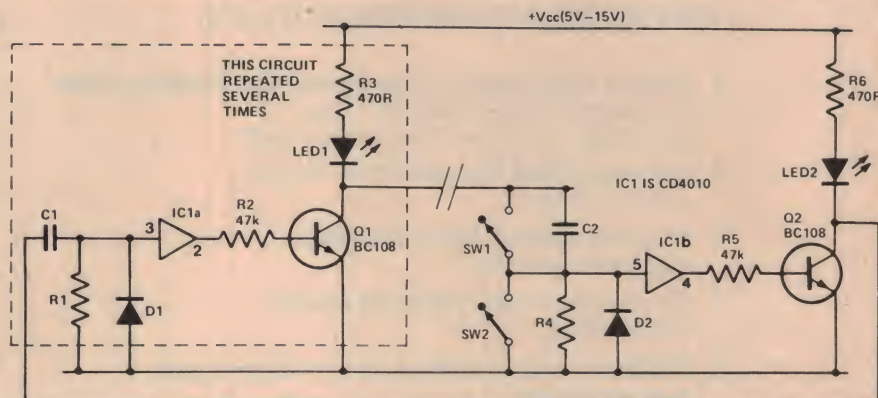

lower threshold. When it does, the output of IC1b will go low and Q2 will turn off. Then, C1 will charge via R6 and LED2, but the initial pulse will turn Q1 on via IC1a and LED1 will light. When C1 charges such that the input of IC1a goes below its lower threshold, Q1 will turn off, triggering the next inverter stage in the chain and so on, right

around the chain. The input R-C for each stage (C1, R1 etc) determines the 'on' time. The diodes (D1-D2, etc) discharge C1-C2 etc when the preceding stage transistor turns on.

By using high dissipation transistors and 12 V lamps instead of LEDs, the circuit is suitable for such applications as Christmas tree light displays, etc.



Transistors mimic SCR

This circuit, from **J. da Silva of Croydon, NSW**, simulates an SCR. The 'sensitivity' trimpot is useful to set the triggering voltage and prevents the circuit self-triggering from the leakage current of the transistors.


By reversing the polarity of the transistors the circuit becomes a PUT

(programmable unijunction transistor) and by replacing the lower transistor with a phototransistor the circuit can be light activated. Any complementary silicon transistor pairs are suitable for this circuit. (Ed. Note: whilst we are aware that this circuit is not really new or original, it is not one that is widely known amongst hobbyists).

A "no hands" organ

This simple organ is really an electronic music box. An idea from **Shane Wayne of Victor Harbour, SA**, the circuit steps through a number of preset notes (up to 10) to play a simple tune — music box fashion.

A 555, used as a low frequency oscillator, clocks the 4017 — a decade divider with 10 decoded outputs. The outputs of the 4017 drive trimpots connected to a second 555 arranged as an audio oscillator. Each trimpot sets the frequency or pitch of the audio oscillator. As each output of the 4017 goes high in turn, the audio oscillator changes pitch — and you can play a tune. The output

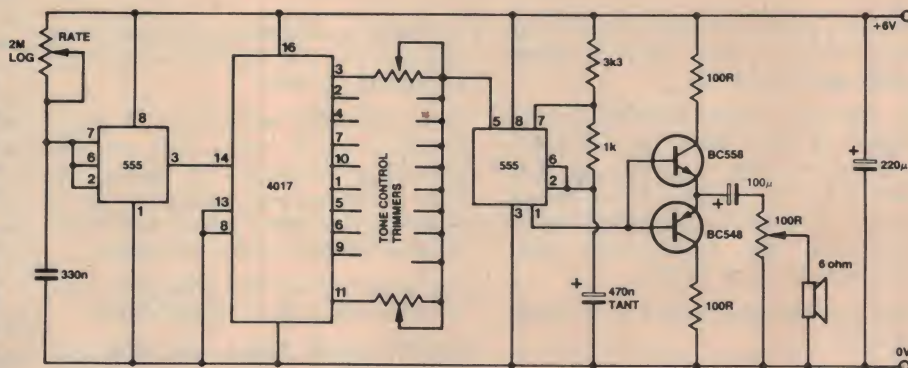

of the audio oscillator is fed to a complementary pair of transistors which drive a speaker for the audio output.

To preset the trimpots, disable the

555 clock and jumper the end of each trimpot connected to the 4017 to the positive supply in turn, then adjust for the required note.

INTRODUCING THE \$49.00 DISC DRIVE! *

ONLY FROM COMPUTER IMPORTS PTY. LTD.

1. Genuine Tandy Expansion Interface with 32K Fitted and Tested
2. One Only MP1 B51 40 Track Disc Drive
(up to 200K capacity DD. 5ms track-to-track)
3. Dick Smith X3234 Regulated Power Supply
(will run 2 drives)
4. Four Drive Cable to Expansion Interface
(add another 3 drives)
5. Newdos 40 Operating System by Apparat
(all the extras)
6. TRS 80 Disk and Other Mysteries by H.C. Pennington
(best seller in US)

RETAIL LIST PRICE	OUR PACKAGE PRICE*
\$919	\$919
\$406	\$49
\$60	\$60
\$69.95	\$69.95
\$110	\$110
\$30	\$30
<u>\$1594.95</u>	<u>\$1237.95</u>
Tax Paid	Tax Paid

- * 90 DAY WARRANTY
- * OFFER EXPIRES JANUARY 6TH 1981 AND MAY NEVER BE REPEATED!
- * FINANCE ARRANGED FOR APPROVED CUSTOMERS THROUGH CAGA FINANCE, NOARLUNGA CENTRE.
- * BANKCARD WELCOME.
- * OBVIOUSLY WE WILL BE RUSHED OFF OUR FEET WITH THIS ONE SO RUSH OFF YOUR ORDER TODAY!

COMPUTER IMPORTS PTY. LTD.

P.O. BOX 7, PORT ADELAIDE, S.A., 5015

PHONE (08) 26 88065

PETER HARTLEY SOFTWARE Box 132, P.O. EASTWOOD, SOUTH AUSTRALIA 5063

SUPER SNAKE

The ever popular Snake has been made even harder, faster and a greater challenge than before.

A real-time graphics-oriented game, Super Snake offers an everlasting challenge to every Level II user. With two levels of difficulty and continuously increasing speeds, you'll always have fun, but you'll never relax, playing with Super Snake.

Can you beat the current record score of 4775?

It's possible, but you'll need a lot of practice!!!

Requires 16K, Level II.

\$9.50 incl. p&p

DALEK CHASE

A real-time interactive game offering hours of fun and excitement to both young and old alike.

With automatic adjustment to levels of play, you'll never tire of this enthralling challenge. The better you play, the harder each subsequent game becomes. Play badly enough and Dalek Chase will refuse to play any more.

Are your reflexes fast enough to save Dr. Who from the pursuing Daleks?

CLOAD Dalek Chase, and find out for yourself.

Requires 16K, Level II.

\$9.50 incl. p&p

TOUCHTYPE MK. II

Australia's most successful computer-based typing course has been further refined and improved. Now consisting of four separate programs, Touchtype can teach anyone to type.

Touchtype explains correct keyboard usage in a carefully integrated series of 22 lessons. Practice exercises are set, and marked on the screen while you watch. These exercises not only reinforce the particular skills taught in the associated lesson, but also introduce a structured revision of earlier parts of the course.

Speed and accuracy tests are used to give a realistic assessment of the student's progress, and the computer will advance a student only on the successful completion of the current learning module.

Requires 16K Level II.

\$19.95 incl. p&p

**Purchasers of the original Touchtype can upgrade to the new version by sending us their original cassette and only \$5.00.

Shoparound

THIS PAGE is to assist readers in the continual search for components, kits and printed circuit boards for ETI projects. If you are looking for a particular component or project — check with our advertisers if it is not mentioned here. Also, for a list of suppliers who stock the ETI projects published over the last few years, our "Kits for Projects" page may generally be found on the page immediately before the DREGS page (inside the back cover).

This month's bag of projects are a little unusual and some special components are required. However, we have gone to some trouble to ensure that these components will be available by the time the magazine goes on sale. In fact, we understand they're ready as this is written, a few weeks before publication. Nevertheless, we've got our fingers crossed . . .

The pH meter

The electronics for this project employ the Intersil ICL7106 and LAD204 3½-digit liquid crystal display. The ICL7106 is distributed in Australia by R & D Electronics. They have a 'kit', known as the RIK6017, containing the 7106 and an LAD204 3½-digit LCD display which they advise will be available to readers for the special price of \$28.80 plus 15% sales tax. (Normal price is \$35.90 plus tax). This totals \$33.12, about 25% below normal price. Readers ordering by mail should include \$2.50 post and handling costs. R & D Electronics are located at:

Sydney: 133 Alexander St
CROWS NEST 2065.

Ph: (02)439-5488

Melbourne: 257 Burwood Highway
BURWOOD 3125. Ph: (03)288-3232

Alternatively, many kit and component suppliers stock the Intersil Digital Panel Meter Evaluation Kit employing these ICs. It is known as the ICL7106EV kit and sells at prices varying between about \$35 and \$45.

If your usual kit or component supplier is not stocking the Ionode pH probes as mentioned in the article (pages 24, 25), they may be obtained from Starcross Scientific, P.O. Box 151 Frenchs Forest, NSW 2086. Available mail order, the G101NFE general purpose pH probes are supplied with a plastic protector cap, a wetting cap for storage and a comprehensive booklet plus two 200 ml containers of buffer solution, one of pH 6.88, the other pH 4.00. The probe itself is a "non-flow" sealed type and has a BNC plug fitted. It will have quite a long life without needing replenishment of the internal electrolyte. Total cost for the package is \$45.70, which includes sales tax and delivery. If you need any accessories, such as 100 ml plastic beakers, wash bottles etc., Starcross Scientific can assist. They also have special spear point electrodes for soil analysis.

At the time of going to press, two firms indicated they would be supplying complete kits for this project: All Electronic Components of 118 Lonsdale St, Melbourne and Electronic Agencies of 115 Parramatta Rd, Concord NSW.

Most components suppliers will be stocking pc boards and Scotchcal panels for this project: Radio Despatch Service, D.R. Electronics and Electronic Agencies in Sydney; Rod Irving Electronics, Ellistronics and All Electronic Components in Melbourne. Possibly Dick Smith stores also. The Ionode pH probes will be available we understand from Radio Despatch Service, Electronic Agencies and D.R. Electronics in Sydney.

The collet knobs we used on our prototype are distributed by Associated Controls Pty Ltd of 55 Fairford Rd Padstow NSW, and 214-224 Wellington Rd, Mulgrave Vic.

ETI-1500 metal detector

This project requires a prewound and aligned search head. This is made by Altek Instruments of the UK and All Electronic Components of Melbourne are acting as their agents in Australia. In addition, AEC will be supplying the handles and case we used to construct our prototype. All these special items are available to other suppliers at wholesale rates from All Electronic Components, as well as complete kits.

At the time of going to press we understand that, apart from All Electronic Components, Electronic Agencies in Sydney will be carrying complete kits for this project. Printed circuit boards, Scotchcal panels etc should be available through most suppliers we have mentioned previously.

Series 3000 compact stereo

Last month's feature project is being stocked as a complete kit by All Electronic Components, Rod Irving Electronics and Tasman Electronics in Melbourne and Radio Despatch Service in Sydney (surprise, surprise!).

ETI-475 AM tuner

Featured in our September issue, this tuner is being stocked as a complete kit by All Electronic Components in Melbourne and Radio Despatch Service in Sydney. If you've gathered all the bits together for yourself, chances are you're still seeking potcores, right? Well, both these firms can supply potcores for this tuner.

Project price estimates

This information is published as a guide and a variety of factors may affect the actual price of a project, whether obtained as separate components, or as a kit.

ETI-572 pH Meter	\$80 - \$90 (inc. pH probe)
ETI-1500 Metal Detector	\$200
ETI-597 Emergency Lighting Unit	\$18 - 24 (less batteries)



Collet knobs will fit where conventional grub-screw knobs will not. They are secured to a control shaft by a split sleeve and nut arrangement. These collett knobs, distributed here by Associated Con-

trois Pty Ltd, headquartered at 55 Fairford Rd, Padstow NSW. They are available in a wide range of colours and sizes and can be fitted with a variety of skirts: pointers, numbered, flange types.



MENSA COMPUTERS PTY. LTD.

Suite 3, 454 St. Kilda Road, Melbourne, 3004. Telephone: (03) 26-5683, 26-6150.

FINDEX — The Real Computer



THE WORLD'S FIRST PORTABLE MICROCOMPUTER
Battery or mains operated

RAM 48K to 2 megabytes, bubble memory to 2MB, gas plasma display, optional audio, printer, mass storage mini floppys to 800K bytes, hard disk to 195 megabytes, acoustic coupler, S-100 bus, battery optional, CPU with real time clock. For dynamic businessmen on the move. Ideal for real estate agents, insurance brokers and accountants.

**SUPERBRAIN™
SERIES**

**BUSINESS
SYSTEMS**

Priced competitively from as low
as \$45.00 p.w. lease cost includ-
ing sales tax and software.



Powerful, multi-purpose microcomputer systems.

TYPICAL APPLICATIONS

Debtors ledger and statements, creditors ledger and remittances, general ledger and trial balance, order entry/invoicing, sales analysis, payroll/wages, enquiry, word processing, mailing, record keeping, ledger card, doctors office, real estate, agency accounting, hotel/motel accounting, branch office accounting.

Priced from \$4995

OPAL 1000

The OPAL 1000 is an 8 slot S-100 system conforming to the new IEEE standards. A Delta Products Z80a 4 MHz CPU card, with 2 RS232c serial and 3x8 bit parallel ports, is used in conjunction with the Delta Products Disk Controller. Memory is provided by a 4MHz 64k dynamic RAM Board by Measurement Systems and Control. The memory board is fully bank selectable and is designed for upgrading to a multi-user system. Disk drives are 2x8" Shugart SA801R running at double density (480k/drive) and fitted with our exclusive Disk Saver which prolongs the life of the drives and floppy disks by turning off the AC power to the drives 14 seconds after the last drive select and thus reduces routine maintenance. The Disk Saver also reduces the risk of data loss due to power failures. The software is CP/M version 2.2 with Delta Product's utilities which include DTEST (for testing drives and floppy disks) and M2 (a comprehensive memory test program). The Delta PROM monitor enables fault finding to be carried out independently of the Disk Drives. The system is mounted in an attractive pressed Aluminium housing with a cast front panel fitted with reset button and key operated on/off switch.

Dealers for Opal in Victoria.
Sole Distributor for Findex, Victoria and NSW.

SUPPLIERS FOR NDKS S-4000

MATHEMATICS

$$F(\omega) = aT \frac{\sin \omega T/2}{\omega T/2} e^{-j\omega T/2}$$

$$e_{rms}^2 = 4KTR(f_2 - f_1)$$

$$L_1 = 10 \log \frac{1}{80} \times S_n \text{ (dB)}$$

$$A^2 + B^2 = C^2$$

$$A^2 + B^2 = C^2$$

$$F(\omega) = aT \frac{\sin \omega T/2}{\omega T/2} e^{-j\omega T/2}$$

$$e_{rms}^2 = 4KTR(f_2 - f_1)$$

$$L_1 = 10 \log \frac{1}{80} \times S_n \text{ (dB)}$$

$$A^2 + B^2 = C^2$$

$$A^2 + B^2 = C^2$$

$$F(\omega) = aT \frac{\sin \omega T/2}{\omega T/2} e^{-j\omega T/2}$$

$$e_{rms}^2 = 4KTR(f_2 - f_1)$$

$$L_1 = 10 \log \frac{1}{80} \times S_n \text{ (dB)}$$

$$A^2 + B^2 = C^2$$

$$A^2 + B^2 = C^2$$

$$F(\omega) = aT \frac{\sin \omega T/2}{\omega T/2} e^{-j\omega T/2}$$

$$e_{rms}^2 = 4KTR(f_2 - f_1)$$

$$L_1 = 10 \log \frac{1}{80} \times S_n \text{ (dB)}$$

$$A^2 + B^2 = C^2$$


$$A^2 + B^2 = C^2$$

ETI READER OFFER

C10 DATA CASSETTES

\$1.65 each !

in packs of 20
save around 20%

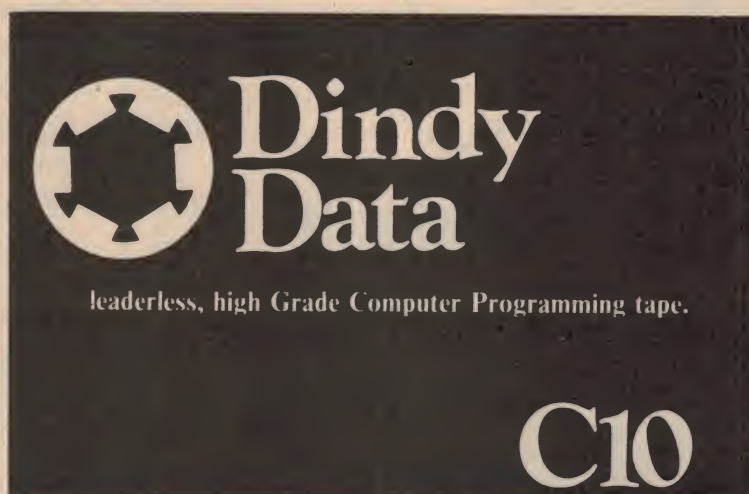

The majority of home and hobby computers employ cassette tapes for mass storage, the most common, and useful, type being the C10 cassette. Dindy Marketing has arranged to make their Dindy Data C10 cassettes available to ETI readers in packs of 20 at a special price — you can save around 20% on the price compared to similar tapes.

Dindy Data Cassettes are manufactured expressly for use in home computers. The cassettes feature 'instant-start', so no data or recording time is lost while waiting for leader tape to pass as in other cassettes. The precision housing and mechanism feature a clamped spring pressure pad to ensure good tape to head contact with no loss of data. The Dindy Data Cassette tape is certified for use on home computers and features a consistent durable coating on a tensilized base ensuring no dropouts or data loss with stretch.

Specification:

Housing — Hi Impact Hi Heat polystyrene shell, five screw type, acetal drive hubs and guide rollers, lubricated stainless steel pins, clamped phosphor bronze spring pressure pad, beryllium shield and graphite polyester slip sheets.

Tape: 12 micron tensilized base. High density acicular gamma ferric oxide coating dispersed in poly-urethane binder. **These tapes come with a five year unconditional guarantee.**

Money back guarantee: Dindy offer to refund the purchase price in full if you are not completely satisfied and provided you return the goods within 14 days of receipt.

NOTE: This offer is made by Dindy Marketing (Aust) Pty Ltd and ETI is acting as a clearing house only. Cheques or money orders should be made payable to 'DINDY C10 CASSETTE OFFER' and sent, together with the coupon (or a photostat or clear, handwritten copy of same), to C10 Cassette Offer, ETI Magazine, 15 Boundary St, Rushcutters Bay, NSW 2011. We will then process your order and pass it on to Dindy who will send you the goods. Please allow up to six weeks for delivery.

NOTE: Offer closes 31 January 1981

Send coupon to:

C10 Cassette Offer

ETI Magazine, 15 Boundary St, Rushcutters Bay NSW 2011

Please supply: Quantity: pack(s).
of 20 pack C10 cassettes at \$33 a pack \$
Packing & delivery — \$2.50 per pack \$
TOTAL \$

Name

Address

..... Postcode

Cheque or money order

Or use your Bankcard

4	9	6													
---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--

Expiry Date/...../.....

Signature

C70MGP

General Instrument's
NEW! Thinking Cap
Keyboard



General Instrument's Keyboard Division has combined state-of-the-art microprocessor technology with the reliability and simplicity of capacitive keys to create a highly flexible, low cost keyboard for OEM's and hobby projects.

The C70-MGP is chock full of features like 4 level ASCII encoding, serial and parallel outputs, N-Key rollover, provision for RS232 and 20MA loop connection, cursor control and user definable keys and programmable baud rates, all for around \$150, plus tax. At a dealer near you.

AUTHORISED DEALERS: Sydney (02) E. & M. Electronics 51-5880. A.E.D. 632-6301. Applied Technology 487-2711. G.E.S. 439-2488. Melbourne (03) Sontron Instruments 568-4022. Cottage Computers 481-1975. Ellistronics 602-3282. Stewart Electronics 543-3733. Brisbane (07) Baltec Systems 36-5183. Zero One Electronics 371-6707. ACT (062) Ortex 82-4995. Adelaide Rogers Electronics (08) 42-6666. Perth (09) Micro Controls 325-2444. New Zealand Southmark (9) 798-078.



daneva control pty. ltd.

66 Bay Road, Sandringham, Vic., 3191. Ph: 598-5622 Telex: AA34439

Ohio Scientific dealer network is Australia-wide

For more information and advice call on your local dealer to help you select the best system for your needs

AUSTRALIAN DISTRIBUTOR-TCG.
31 Hume Street, Crows Nest, N.S.W.
2065

**AUTHORISED AUSTRALIAN AGENTS
NEW SOUTH WALES**

Bambach Electronics
NEWCASTLE 2 4996

Compuserve Newcastle Pty. Ltd.
HAMILTON 61 2579

Hi-Fi Gallery
TAMWORTH 66 2525

Macalec Pty. Ltd.
WOLLONGONG 29 1455

Micro Visions
KINGSFORD 662 4063

Shoalhaven Communication Services
NOWRA 24 444

J.G. Pearce Systems
DOVER HEIGHTS 789 4300

Unique Electronics
MERRYLANDS 682 3325

VICTORIA

Ellison Hawker Education Pty. Ltd.
HAMPTON 596-7444

Cypher Data Systems
MELBOURNE 86 22122

Comprocessing Pty. Limited
SALE 44 3399

QUEENSLAND

Dialog Pty. Ltd.
BRISBANE 221 4898

SOUTH AUSTRALIA

Applied Data Control
FULLARTON 79 9211

K Tronics
ADELAIDE 212 5505

WESTERN AUSTRALIA

Datas Computer Accounting Services
SUBIACO 325-5779

Micro Data Pty. Ltd.
EAST PERTH 328-1179

Micro Solutions
SUBIACO 328-8372

TASMANIA

Eastside Computers
EAST DEVONPORT 27 8121

J. Walsh & Company
HOBART 34 7511

AUSTRALIAN CAPITAL TERRITORY

Minicomputer & Electronic Services
PHILLIP 82-1774

NEW ZEALAND DISTRIBUTOR

Computer Consultants,
3 Wolfe St., Auckland N.Z.
Phone: 79-8345

Computer Consultants
Queens Rd., Lower Hutt, N.Z.
Phone: 69-4979




TOMORROWS TECHNOLOGY TODAY

OHIO SCIENTIFIC

The Challenger 4

Whichever way you look at it, no other computer offers so much for so little, and in colour!

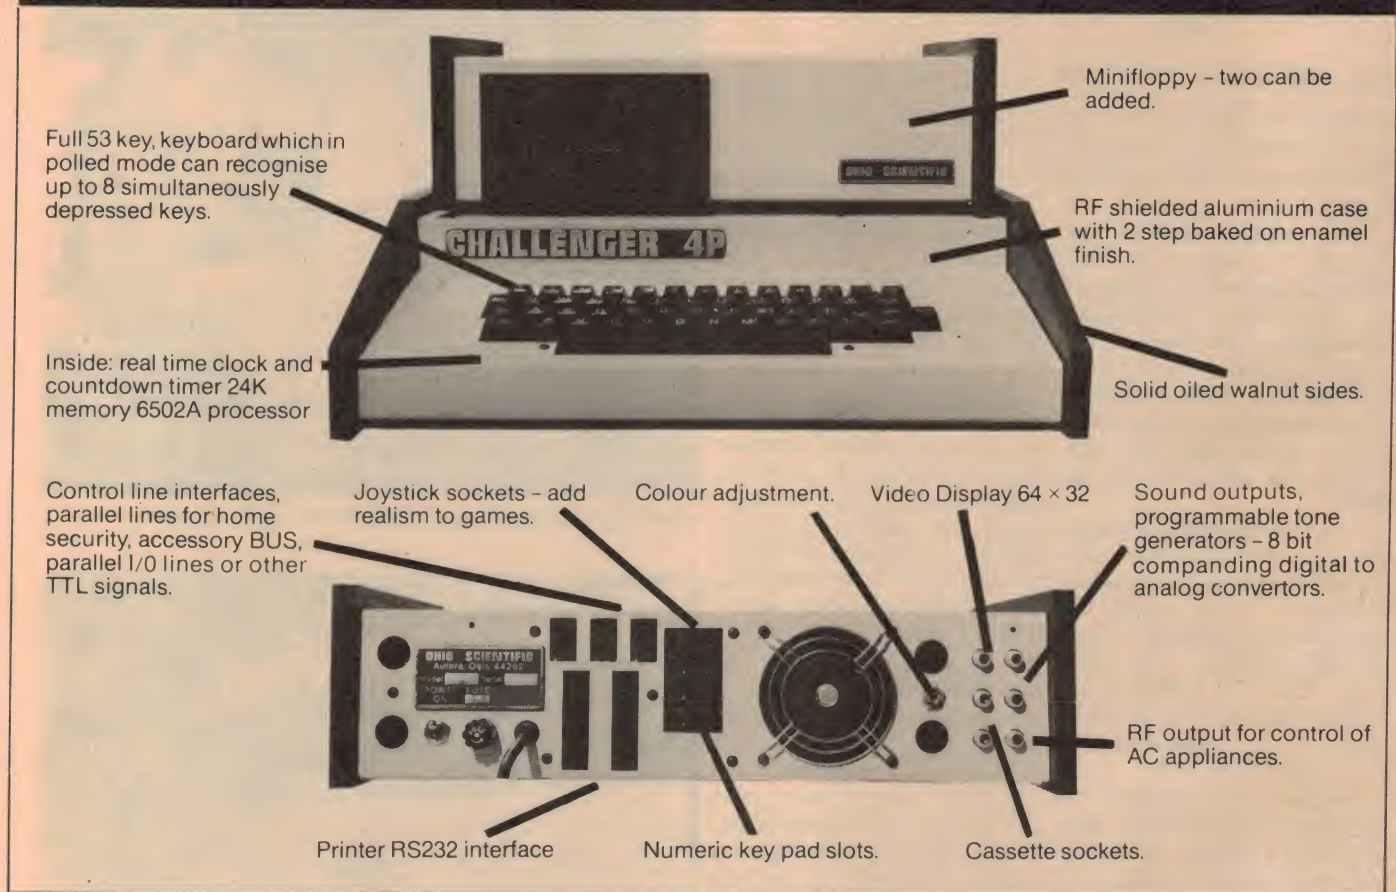

You'd have to go a long way to get better value in a computer. It has execution speed that really separates the computers from the toys. We think the Challenger 4 is way ahead of anything you've seen so far, for a wide variety of uses including business, personal, educational and games, as well as a real-time operating system, word processor and a data base management system.

The Challenger 4 has a 2MHz 6502 processor, and if that's not fast enough we can supply the GT option with the 6502C processor, and 120 nanosecond memory which averages over one million instructions per second.

A real time clock and count down timer, a 64 x 32 display in 16 colours, including 8K memory in the cassette version, 24K for the minifloppy. A BUS structure allows easy plug in of extra memory or many more OHIO boards. The BUS means modularity. If you bought your vintage C2-4 in 1977 we can change the boards at a much lower cost than a new computer.

For the best surprise of all ask our opposition if they can provide all these facilities. When they can't, ask us!

For the complete list of dealers, please refer to listing on opposite page.

TCG
TOMORROWS TECHNOLOGY TODAY

OHIO SCIENTIFIC

TCG Ohio Scientific Pty. Ltd.

31 Hume Street, Crows Nest, N.S.W. 2065

Phone: 439-6477

LOCKWOOD TCG4616 A

Dollars dominate computer congress

The 8th World Computer Congress, held in Melbourne in October by the International Federation for Information Processing (IFIP), was more of a trade fair than the scientific conference it is officially supposed to be.

The avowed aim of the triennial congress is the dissemination and exchange of information processing knowledge and techniques and the advancement of international understanding and cooperation in the field. Some statements from the organisers give the lie to this.

"We have made a substantial profit" said Ashley Goldsworthy, chairman of the organising committee. "The value of equipment on display is over one billion dollars... firm sales leads from the exhibition already total one hundred million dollars", commented a spokesman for the organisers.

Nevertheless, behind all the commercial razzamatazz, this was also a meeting of minds. Thirty-five invited papers were presented, along with sixty or so submitted papers (half of which were delivered in Tokyo, the joint venue with Melbourne for the Congress). Most of them were highly technical and well beyond the comprehension of the layman, but one dominant theme that emerged was the 'database problem'.

This problem of how best to organise and manage massive libraries of increasingly distributed and constantly changing information still awaits a satisfactory solution. At a press conference Frank Sumner, chairman of the IFIP programme committee, and Dr Simon Lavington, editor of the Proceedings, agreed that very little progress had been made in this area. They suggested that a

totally new approach to data storage and retrieval was needed and that the solutions appeared to lie in the areas of parallel processing and associative memories.

Professor Sumner emphasised that, "We still do not have an adequate method to view the process of access to, and the relationship between, data items. The various database systems — network, relational and hierarchic — all eventually make serial requests to a random access storage device.

Quite divorced from the intellectual discussions at Dallas Brooks Hall was the hard sell of the displays upstairs in the Exhibition Buildings. Some 170 companies were spread over the 16 000 square metres of floor space. The big corporations like IBM and Data General spent hundreds of thousands of dollars on their stands, although Honeywell's stand was remarkable for having virtually no equipment on display, just comfortable armchairs and coffee tables around which visitors were invited to "come in and relax with Honeywell". Rumours that Honeywell had simply forgotten about preparing the stand until the last minute have not been substantiated.

The 'micro sector' of the industry, while spending much less on its exhibits, provided some of the main interest. The 'Computer Concepts' display of Apple micros on Rudi Hoess's stand was perhaps the best attended exhibit in the whole show. The highly regarded



ADE displayed the North Star and Compucolor microcomputers.



Mensa's stand featured the Findex portable business micro.

North Star Horizon was displayed on a number of stands, as were the Cromenco, Commodore, Compucolor and Findex systems, to name but a few.

In many ways the exhibition was perfectly timed to suit the distributors and vendors of micro-based business systems. It is only in the past year that

some of these systems have matured, in the sense of offering sophisticated and proven business applications software. An example is the evolution of the PET personal computer into the Commodore Business System.

On the two public exhibition days there were still a few people seeking to buy small business systems for under \$1000, but by



Mike Pratt of SME is proud of his range of peripherals and expansion boards.

and large the operators who peddled such dreams a year or two ago have disappeared. For the most part the vendors in Melbourne were established suppliers offering hardware, software, maintenance and support at realistic prices. They did excellent business.

A feature of the exhibition was the unprecedented number of companies supplying industrial systems. Microcon, Alfatron and Industrial Micro Systems (IMS) were notable exhibitors in this field.

By and large, however, there was nothing very exciting or particularly new in the whole

exhibition. Of course there were systems which had not been displayed and demonstrated before, but one minicomputer looks very much like another.

Prime were displaying their Office Automation System, but although their concept of administrative workstations and management workstations is interesting, one terminal is very much like another unless you can find a salesman to demonstrate the software. Persons like myself, wearing Press badges, found it rather difficult to engage the attention of demonstrators who were much more interested in those with

dollars to spend.

For the businessman, the EDP manager, the potential purchaser, the exhibition was a unique opportunity if they had particular needs and specific applications in mind. For the general observer like myself, the vast array of competing products was all a bit too much to take in. In the end I spent more time talking to people in the industry than investigating the greatest collection of computing equipment ever assembled in the Southern Hemisphere.

Perhaps that wasn't such a bad thing. Perhaps the com-

puter world still pays too little attention to the difficulties of integrating computer systems with people. Professor Calvin Gottlieb had this in mind when he remarked that, "The computer technology cannot be regarded as neutral, if experience shows that in reality, whatever its potentialities, the effect of introducing it is almost always to favour large centralised systems and inhibit local autonomy ... What appear to some as opportunities and markets, to others appear as costs and exploitations."

Christopher Speary



Get your hands on our big new PET 3008 keyboard for only \$999*

At last it's here: the Commodore PET you've been demanding! It's called the PET 3008. It boasts all the many features of our PET 2001, plus something you've been itching to get your hands on. A new, big, typewriter-style keyboard!

To celebrate the arrival of a strictly limited stock, Commodore offers you a great deal. To begin, the price is slashed to \$999*. So straight away you save \$196 on the normal price of \$1195.

Not bad for a start. And there's more...

FREE, C2N CASSETTE UNIT WITH EVERY PET 3008 SOLD

That's right.

Get your new PET 3008 with the big typewriter-style keyboard now, and we'll throw in, absolutely free, a C2N external cassette unit.

Retail value? \$126.50.

So all up on your PET 3008 purchase you save a whopping \$322.50. Naturally, it's a strictly limited offer (either that, or we go broke!)

So whatever you do, don't miss out. See your authorised Commodore Dealer very, very soon!



SAME GREAT DEAL ON THE PET 2001

We mustn't leave out the many people who fancy the PET 2001's calculator-style keyboard. So:

COMMODORE PET 2001, normally.....	\$1195
OUR SPECIAL PRICE NOW.....	\$999
YOU SAVE.....	\$196
PLUS FREE C2N CASSETTE UNIT, NORMALLY.....	\$126.50
TOTAL SAVING.....	\$322.50

commodore

For the name of your nearest authorised Commodore Dealer, write or phone;

COMMODORE INFORMATION CENTRE

3 Campbell Street, Artarmon, NSW 2064 Telephone: (02) 437 6296

*Prices and saving may vary slightly from Dealer to Dealer. Offer ends December 30, 1980 or earlier if stocks run out.

Mlv1395

Software contest results

A while ago ETI ran a competition in association with Computerland Australia, in which readers were invited to submit original software for microcomputers.

Entries were assessed on the following criteria — the value of the software to the user, its complexity, its 'elegance', the degree of human engineering and the quality and presentation of the documentation.

First place in the contest went to **David Segall** of Canterbury Vic, for his HEX INFORMATION RETRIEVAL SYSTEM. He wins the major prize of a Cromenco ZPU Z-80 CPU card and special prizes for Best Documentation and Most Marketable Software.

Second was **W.R. Hodgson** of Chatswood, NSW, with his program for a NAVIGATION

COMPUTER. For this he wins a Vector Graphics 8K RAM kit and the special prize for the Most Original Application.

In third place were **A. Heap and R. Green** of the University of New England, NSW, whose COMPUTER ASSESSMENT OF FARM VIABILITY wins them a Vector Graphics 260 x 260 graphic display generator.

Fourth prize of a Vector Graphics PROM/RAM card goes to **Kenneth Stoke** of Hobart for his game called BUDGET.

All the above prizewinners will also receive free copies of ETI for the next two years.

South Australian software

Peter Hartley, former editor of Micro-80, has established his own software house in Adelaide.

He specialises in small business applications for Z80 based microcomputers and has recently announced major agricultural and small business packages for release early next year. He will also be undertaking custom software development.

The current range of Peter Hartley software includes an interactive typing course called Touchtype, for use with TRS-80 and System 80 micros, and a number of entertaining games.

For more information contact Peter Hartley Software at P.O. Box 132, Eastwood, SA 5063. (08) 79-4061.

... and hardware

South Australian based Computer Imports Pty Ltd has announced its diversification into the small business and hobby computer market.

They will concentrate on the supply of peripheral equipment for the most popular micros. Disk drives, memory expansions and printers will be sourced from both overseas and local suppliers, and the company has announced a number of peripheral packages.

Computer Imports will operate in conjunction with Peter Hartley Software to supply composite hardware/software packages especially tailored to users' specifications.

Contact address is P.O. Box 7, Port Adelaide, SA 5015 (08) 268-8065.


Astrology by computer

A Sydney company is using computers to update the ancient and arcane art of astrology.

Preparing astrological charts has always been a tedious and time-consuming business, involving a great deal of calculation and careful plotting of results, so it was a natural

candidate for computer automation.

Illustrated on this page is a Natal Chart in the Round Wheel format, prepared for us by Austin Levy, head of Astrosearch

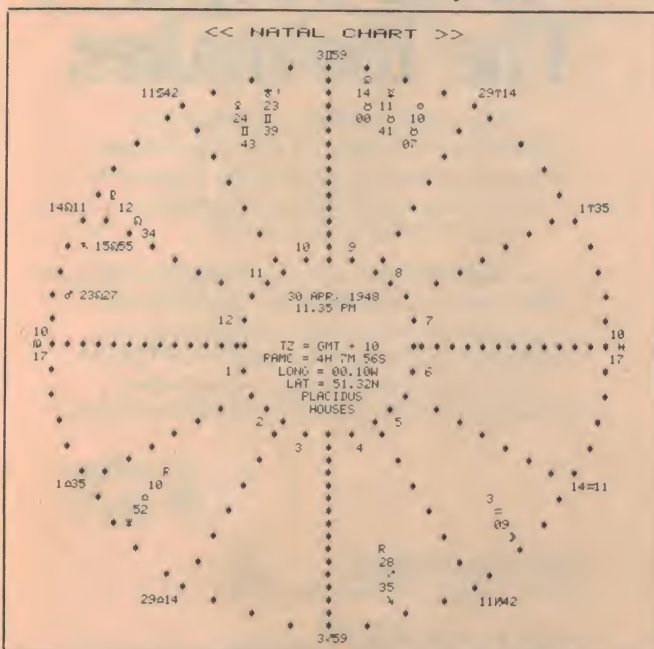

Computer Services, who say they are only the second company in the world to offer a computerised chart plotting service.

The chart shows the positions of the sun, moon and planets at the birthtime of sub-editor William Fisher (the only member of staff who could remember exactly when he was born).

Astrosearch's charts are prepared on a 32K Commodore PET with a dual hard disk drive and a programmable printer. The programs, which are written in BASIC, have two major parts. The first part uses the equations of planetary motion to calculate the positions of the planets at the specified times; the second part, which is four times as long, output formatting.

The Round Wheel formatting program uses reflections to generate the complete design from a quarter circle basis. String variables are used in preference to numerics and the planetary symbols are plotted by

the programmable character generator. Approximately 1500 bits are used to define the quarter circle pattern in memory.

The complete program uses 24K of memory. As well as Natal Charts like the one illustrated here. It can print out Progressed Charts, which are charts showing the planetary configurations at dates other than the birthdate. Biorhythm print-outs are also possible.

Astrosearch are currently working on a high level program which will synthesise interpretations of the astrological data. The idea is to develop a dynamic system rather than a static text file. Other ideas which may yet materialise are computer-made synthesised music and kinetic art displays derived from the astrological data.

For more information contact Astrosearch at P.O. Box 1552, North Sydney, NSW 2060. (02) 913 7559.

\$ THE LOGIC SHOP PTY. LTD.



COMPUCOLOR II ex stock

Features:

- Up to 32K user RAM
- 16K ROM
- Eight colour display
- 32 lines at 64 characters
- Inbuilt 5" disk drive
- RS-232 Port

MICROLINE 80 PRINTER ex stock

Features:

- 80 char/sec
- 40/80/132 char/line
- 9 x 7 dot matrix
- Graphics
- Long life print head (200,000,000)
- Friction, pin and tractor feeds
- Full 96 character ASCII set
- Plug compatible: TRS80, Sorcerer, Apple, Compucolor II, TI 99-4



TELEVIDEO TVI 912B (VDU) ex stock

Features:

- 12" screen • 24 lines at 80 characters • 75 to 9,600 Bauds
- RS-232 or 20MA interface • Printer output Port • Microprocessor controlled.

NorthStar  HORIZON



Features:

- North Star Z80A Processor. • North Star RAM memory board (64K). • North Star Disk Controller Board (4 drives). • Quad capacity drives (360K bytes per drive). • S-100 motherboard with 12 slots and real time clock. • Two serial and one parallel I/O interfaces. • A power supply more than adequate to power a full complement of 12 S-100 boards. • North Star Software — BASIC, Disk Operating System (DOS), and Monitor on diskette. • Applications software: Debtors, Creditors, General Ledger, Inventory, Payroll, Word Processor, Mail Manager.

SPECIAL — 5½" Verbatim Diskettes \$4.00 each.

END OF YEAR SALE — Qume Print Wheels at cost.

\$ THE LOGIC SHOP PTY. LTD.

212 High St, Prahran, VIC. 3181. Phone (03) 51-1950.
91 Regent St, Chippendale, NSW, 2008. Phone (02) 699-4919.

TRS-80 is a registered trademark of Tandy Electronics.



Weller



Weller

The Tools. from Cooper The Toolmaker.

Weller industrial SPI non-temperature controlled soldering irons, with nickel plated copper tips, stainless steel barrels. Impact and heat resistant handles are lightweight.

Available in 25 or 40 watts.

The Weller WC100 cordless soldering iron has been specifically developed for the technician.

It operates from long-life nickel cadmium batteries, and it is therefore ideal for in the field applications. Special adaptor available to re-charge from cigarette lighter in motor vehicles.



The Cooper Group

CRESCENT LUFKIN NICHOLSON WELLER WISS XCELITE



The Cooper Tool Group Limited
PO Box 366, Nurligong St, Albury NSW
2640 Australia. Tel: 21-5511. Telex: 56995.

Print.out

The personal micro goes handheld



Well, almost! The Sinclair ZX80 microcomputer is shaped to sit on a desk or table but it's easily small and light enough to hold in your hand if you prefer.

Selling in this country for less than \$300, the ZX80 looks like opening up a whole new mass consumer market for personal computers.


People accustomed to using more sophisticated and expensive micros will probably find some of its habits a little disconcerting, but first time users are unlikely to be dismayed by any of its features.

Designed around the 780-1 microprocessor chip (a copy by NEC of the ZX80), the ZX80 contains a keyboard, CPU and I/O interface circuitry in a single module and can be used directly with any cassette recorder and TV set. On board are 4K of ROM (all on one chip) and a 1K RAM which can be expanded to 4K with an optional memory expansion board.

One reason for this computer's light weight is that it is enclosed in a 1mm thick plastic case, metallised on the inside to provide shielding.

The keyboard is made up of touch switches, completely covered by a flexible polymer sheet that protects against contamination by dust or liquids. Key symbols are printed on the underside of this sheet to prevent them rubbing off with use. Despite first impressions, the keys are easy to use. They are laid out in the standard QWERTY arrangement.

Sinclair have developed their own variety of BASIC for use with this machine. This has some features which will definitely make things easy for the novice programmer. Key words like RUN, PRINT and LIST, GOTO, GOSUB, LET and so forth can all be entered with a

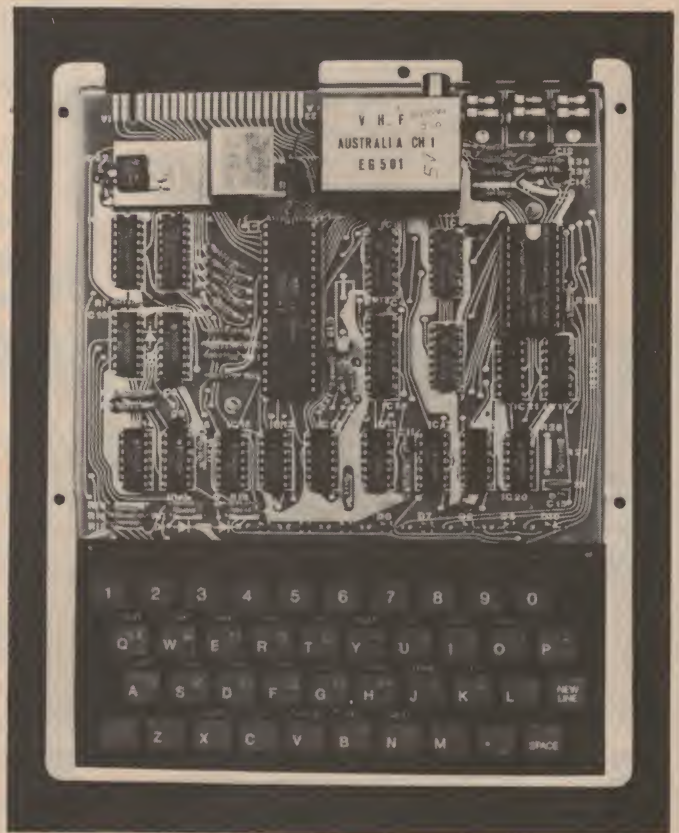

The Dick Smith Daisy Wheel

**If you just
bought any
other printer
you'll eat your
heart out!**



When you want letter-quality printing you are usually talking big money. If you've just bought a word processor printer you'll know what we mean.

In fact, if you've just bought a word processor printer you'd better not read any further. You might get too upset!

The new Dick Smith Word Processor Printer gives you superb print quality (even three carbons down!) at a brisk 25 characters per second. It uses standard Diablo-type daisywheels, giving you low cost replacement and a large variety of fonts. It uses standard business stationery, up to 400mm wide, prints with proportional spacing, in two directions — if you wish. It's hundreds of dollars less than its nearest competitor and thousands of dollars less than many others!

specifications:

Print speed: 25 characters per second; Carriage return speed: 1000ms; Line feed speed: 40ms (4.25mm); Characters per line: 136 (2.5mm pitch) 163 (2.0mm pitch); Resolution pitch: space 0.2mm, line feed 0.5mm; Form width: 398mm maximum; Printing width: 345mm maximum; Number of printing characters: 96; Number of copies: original plus 3 copies; Noise level: below 65db with cover; Print Wheels: Diablo-compatible plastic; Ink ribbon: cloth or multi strike; Interface: Centronics-type parallel; Operating conditions: 5-36 degrees C. 10-90% RH; Power requirements: 240v/50Hz, 70 watts; Dimensions: 625mm (w) x 380mm (d) x 258mm (h); Mass 19.5 kg including cover, power supply

Credit terms available
to approved
applicants

**All this
for only**

\$1995


Cat. X-3265

We also offer outstanding value on this

DOT MATRIX PRINTER

**Fantastic value for
less than \$1,000!!!**

This incredible dot matrix printer uses inexpensive fan fold paper. Upper and lower case with 125 characters per second print speed and a one line buffer memory, plus lots more

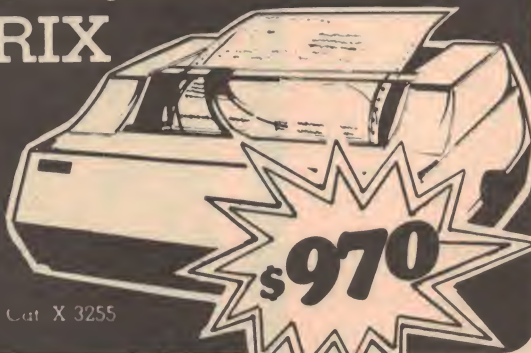

Cat. X 3255

SYSTEM 80 OWNERS. DON'T NEED S-100 EXPANSION?

Use this parallel printer interface if you don't need full S-100 expansion. Save a bundle! Uses similar connecting cable to S-100 interface

Cat X-4013

\$49⁵⁰

PRINTER CABLE

Fitted with edge connector at one end, 57N-36 plug at other: suits virtually all Centronics-type printers. Use with either S-100 interface or parallel printer interface.

Cat X-4014

\$39⁵⁰

**DICK SMITH
Electronics**



**SEE OUR OTHER ADS FOR
FULL ADDRESS DETAILS**

Print-out

single keystroke. The interpreter has a unique syntax checker that prevents entry of program lines with syntax errors, thereby eliminating the frustration of entering a program and only discovering the errors later on when it won't run! And there's a powerful and versatile screen editor that allows modification of existing program lines. However, given the limited capacity of the machine, all these functions have to be provided at the expense of the more powerful BASIC commands.

This deficiency of powerful commands can be eliminated by purchasing the new 8K ROM chip that Sinclair have designed for the ZX80. This is a drop-in replacement for the standard ROM chip, designed for higher level computing, and comes with a new keyboard template and a supplementary operating manual.

As well as a greatly improved range of BASIC commands, the new ROM features full floating point arithmetic with 9-digit accuracy, logarithmic and trigonometric functions and their inverses, a graph plotting capability and a facility for generating animated displays using a 'PAUSE n' command, which sends the display file to the TV screen for n frames or until a key is pressed.

The microprocessor itself, which is clocked at 3.25 MHz, performs every single function, including the control of the cassette recorder and the TV monitor. As a result, the video display disappears whenever any operation is being carried out, returning when the operation is complete. This is one of the features that practised computer users might find off-putting, but it's doubtful whether novices will find it a nuisance.

When we finally figured out how to prise open the case without completely destroying it, we discovered a single well designed and well finished printed circuit board with all the components mounted directly onto it — the ZX80 is designed to be used with an external power supply.

Closer inspection revealed that Clive Sinclair has obviously shopped around for components in an effort to keep the price as low as possible. Memories from Ireland, video driver from Taiwan, regulator from El Salvador, gates from the UK and a Japanese microprocessor give the machine a truly international flavour. There's one Australian section too, the VHF modulator which replaces the UHF unit fitted to models sold in Europe.

Because this micro does not



The ZX80 was first publicly shown in Australia at the 8th World Computer Congress in Melbourne.

use the standard ASCII codes, it is not possible to connect a conventional printer, but it is likely that Sinclair will be producing their own compatible printer sometime in the future.

The ZX80 is distributed in Australia by Sinclair Equipment (Australia) Pty Ltd, 308 High St, Key, Vic 3101. (03) 861 6224.

Local outlets in Victoria are Rod Irving Electronics in Northcote, Myers in Melbourne, Minit Computer Service in Bendigo. NSW suppliers are Emona Enterprises in Sydney, P. Hatcher in Sydney, DGE Systems in Newcastle, South Coast Computing Service in Nowra,

Maestro in Kinkumbra.

In Tasmania the ZX80 is available from J. Walch and Son of Hobart, in the Northern Territory from Ascom Electronics of Alice Springs, in the ACT from Computer Business Aids, in Western Australia from WACB Radio Central, Radiotronics and Focus Electronics in Esperance.

Queensland outlets are Computerland in Brisbane and Scotts Audio in Townsville. South Australian residents can obtain the ZX80 from Computerland and from Computer Imports Pty Ltd.

Elaine Ray

NorthStar Computers



with CP/M Operating System

\$4995 plus sales tax if applicable.

30MB Hard Disk with Controller

\$9995 plus sales tax if applicable.

AMPCOMP SYSTEMS

PO BOX 214, SEVEN HILLS, NSW 2147.

TELEPHONE (02) 624-3509.

For Sorcerer Apprentices

Christmas is just around the corner, so I thought you deserved a few helpful routines which can be interfaced with your BASIC programs. Thanks to Brendan J. Joyce for suggestions in his letter from which I quote:

"The column 'For Sorcerer Apprentices' in ETI is very welcome. It is frustrating as a novice to own what one has been assured is a very powerful micro and not be able to unleash its strength. There are articles in abundance on other better known machines, but there is almost a conspiracy of silence on the Sorcerer ...

... There are three problems bothering me that I would like some information on:

- (1) Printing a given number of lines on a page so that a space can be left above and below the perforations.
- (2) A keyboard sensing routine that can detect what key has been pressed without the need for the RETURN key ...
- (3) A method of accessing monitor subroutines using BASIC. There must be many powerful subroutines in the monitor, but the identification of these and the method of access to them is a mystery to a non-professional such as myself.

Good luck in your efforts and three cheers for A.P.F.Fry."

Thanks for your letter Brendan. The simplest way of making sure that your printer keeps track of lines per page is to do all your printing through a subroutine. This will allow you to print lines to the screen without losing track of the line count on your printer. Include the lines:

```
0 CLEAR 500:LP=60:CP=6
1 VE=PEEK(-4095)*256+PEEK(-4096)-47
2 IF VE > 32767 THEN VE = VE-65536
```

Then use this to print:

```
10 PR$="HELLO":CR=0
20 GOSUB 1000
```

Where the subroutine is as follows:

```
1000 PP$=PP$+PR$
1010 IF CR THEN RETURN
1020 POKE VE,147:POKE VE+1,233
1030 PRINT PP$:CO=CO+1
1040 IF CO LP-1 THEN FOR CO=CP TO 1
STEP-1:PRINT:NEXT
1050 PP$="":POKE VE,240:RETURN
```

Of course you mustn't use the variables PP\$, PR\$, CR, CO, LP, CP or VE for any other purpose.

In line 0 you must clear at least enough space to handle the longest line you plan to print. LP is the number of printed lines per page and CP is the number of carriage returns before page end. The total of these two should be the number of lines on your form. CR is a flag to tell the subroutine whether or not to print a carriage return at the end of the line. If CR=1 then the following line will be printed where the last left off. CR=0 terminates the line and prints a carriage return. The subroutine will automatically switch the printer on when it needs it and return with it switched off. You never have to worry about this while the programme is running.

You'll notice that in line 1020 I poked VE + 1 with 233. This is to overcome a bug in the Monitor which may cause problems occasionally. When the Sorcerer is switched on or reset, it sets the SEND vector to E9F0 and the RECEVE vector

to EB1C. If you then use the Monitor commands SE 0=V or SE 1=K (ostensibly the same vectors), Exidy programmers see fit to stick in different vectors that do the same thing:

SE 0=V sets the SEND vector to E01B (which jumps to E9F0)

SE 1=K sets the RECEVE vector to E018 (which jumps to EB1C)

The problem is that when you POKE VE,147 or POKE VE,240, you change only the LOW part of the address. If you exit BASIC and set the output, the Monitor will have changed the HIGH part when you return. To be safe, always POKE VE+1,233 when you are switching the printer on and off using this method. One can only hope Exidy takes note of all these bugs — there are lots of 'em!

In answer to Question 2, I have included a simple keyboard scanning routine which uses a modified INP(X) function:

```
10 POKE 318,195:POKE 320,224
20 A=INP(9)
```

Line 20 will load the ASCII number of any key pressed into variable "A". If you want to wait for just any key, include line 30 as follows:

```
30 IF A=0 THEN 20
```

If you want to check for a specific key, (e.g. "*") change line 30 to:

```
30 IF A <> ASC("*") THEN 20
```

Your last question was not so easy, Brendan. I did some asking around and found that Greg Lister of Software Source could provide a solution.

BASIC MONITOR INTERFACE

Copyright (C) November 1980 Greg Lister + Claude Almer

ADDR	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F000:	2A	B1	01	2B	7E	FE	28	20	FA	FD	E5	D1	23	7E		
F010:	FE	AD	20	02	3E	3D	12	13	FE	29	20	F2	1B	EB	36	OD
F020:	FD	E5	E1	CD	25	E2	CA	14	C3	DD	21	12	E3	E5	DDE5	
F030:	06	02	DD	7E	00	BE	20	0E	23	DD	23	10	F5	D1	D1	DD
F040:	6E	00	DD	66	01	E9	DDE1	E1	DD	23	DD	23	DD	23	DD	DD
F050:	23	DD	7E	00	B7	20	D6	C3	14	C3	FA	DF	47	2B	43	31

Here's how to use it. Enter the above listing from F002 (HEX) onwards. Claude warns that you shouldn't use it in conjunction with his KEYRP programme (ETI November 1980)

It is now accessed from BASIC with the USR(X) function as follows:

```
10 POKE 260,2:POKE 261,240:REM initialise USR function.
20 Z=USR(COMMANDLINE)
```

where COMMANDLINE can be any of the standard Exidy Monitor commands, e.g.

Z=USR(DU F002 F05F)	will dump the program you've just keyed in
Z=USR(SE 0=L)	will switch printer on
Z=USR(SE 0=V)	will switch printer off
Z=USR(SE S=10)	will slow the screen down
Z=USR(SA BASMO F002 F05F)	will save the program

An excellent use is to load a tape of predefined graphics directly from Basic.

Finally, there appears to be a lot more backup and worthwhile software than we know of. If readers or programmers would like an appraisal of their software, please send me a copy care of ETI. Of course copyright software will be treated in complete confidence.

A.P.F. Fry



**HAS THE TASTE STOPPED
GETTING THROUGH?**

If your present tobacco just doesn't deliver the satisfaction you want, then roll a Cannon.


A rich new blend of medium dark cigarette tobacco that's just a little bit stronger.

Cannon, for the taste you're missing out on now.

CANNON.
SLIGHTLY STRONGER.



Sooner or later you'll need a Gregory's.

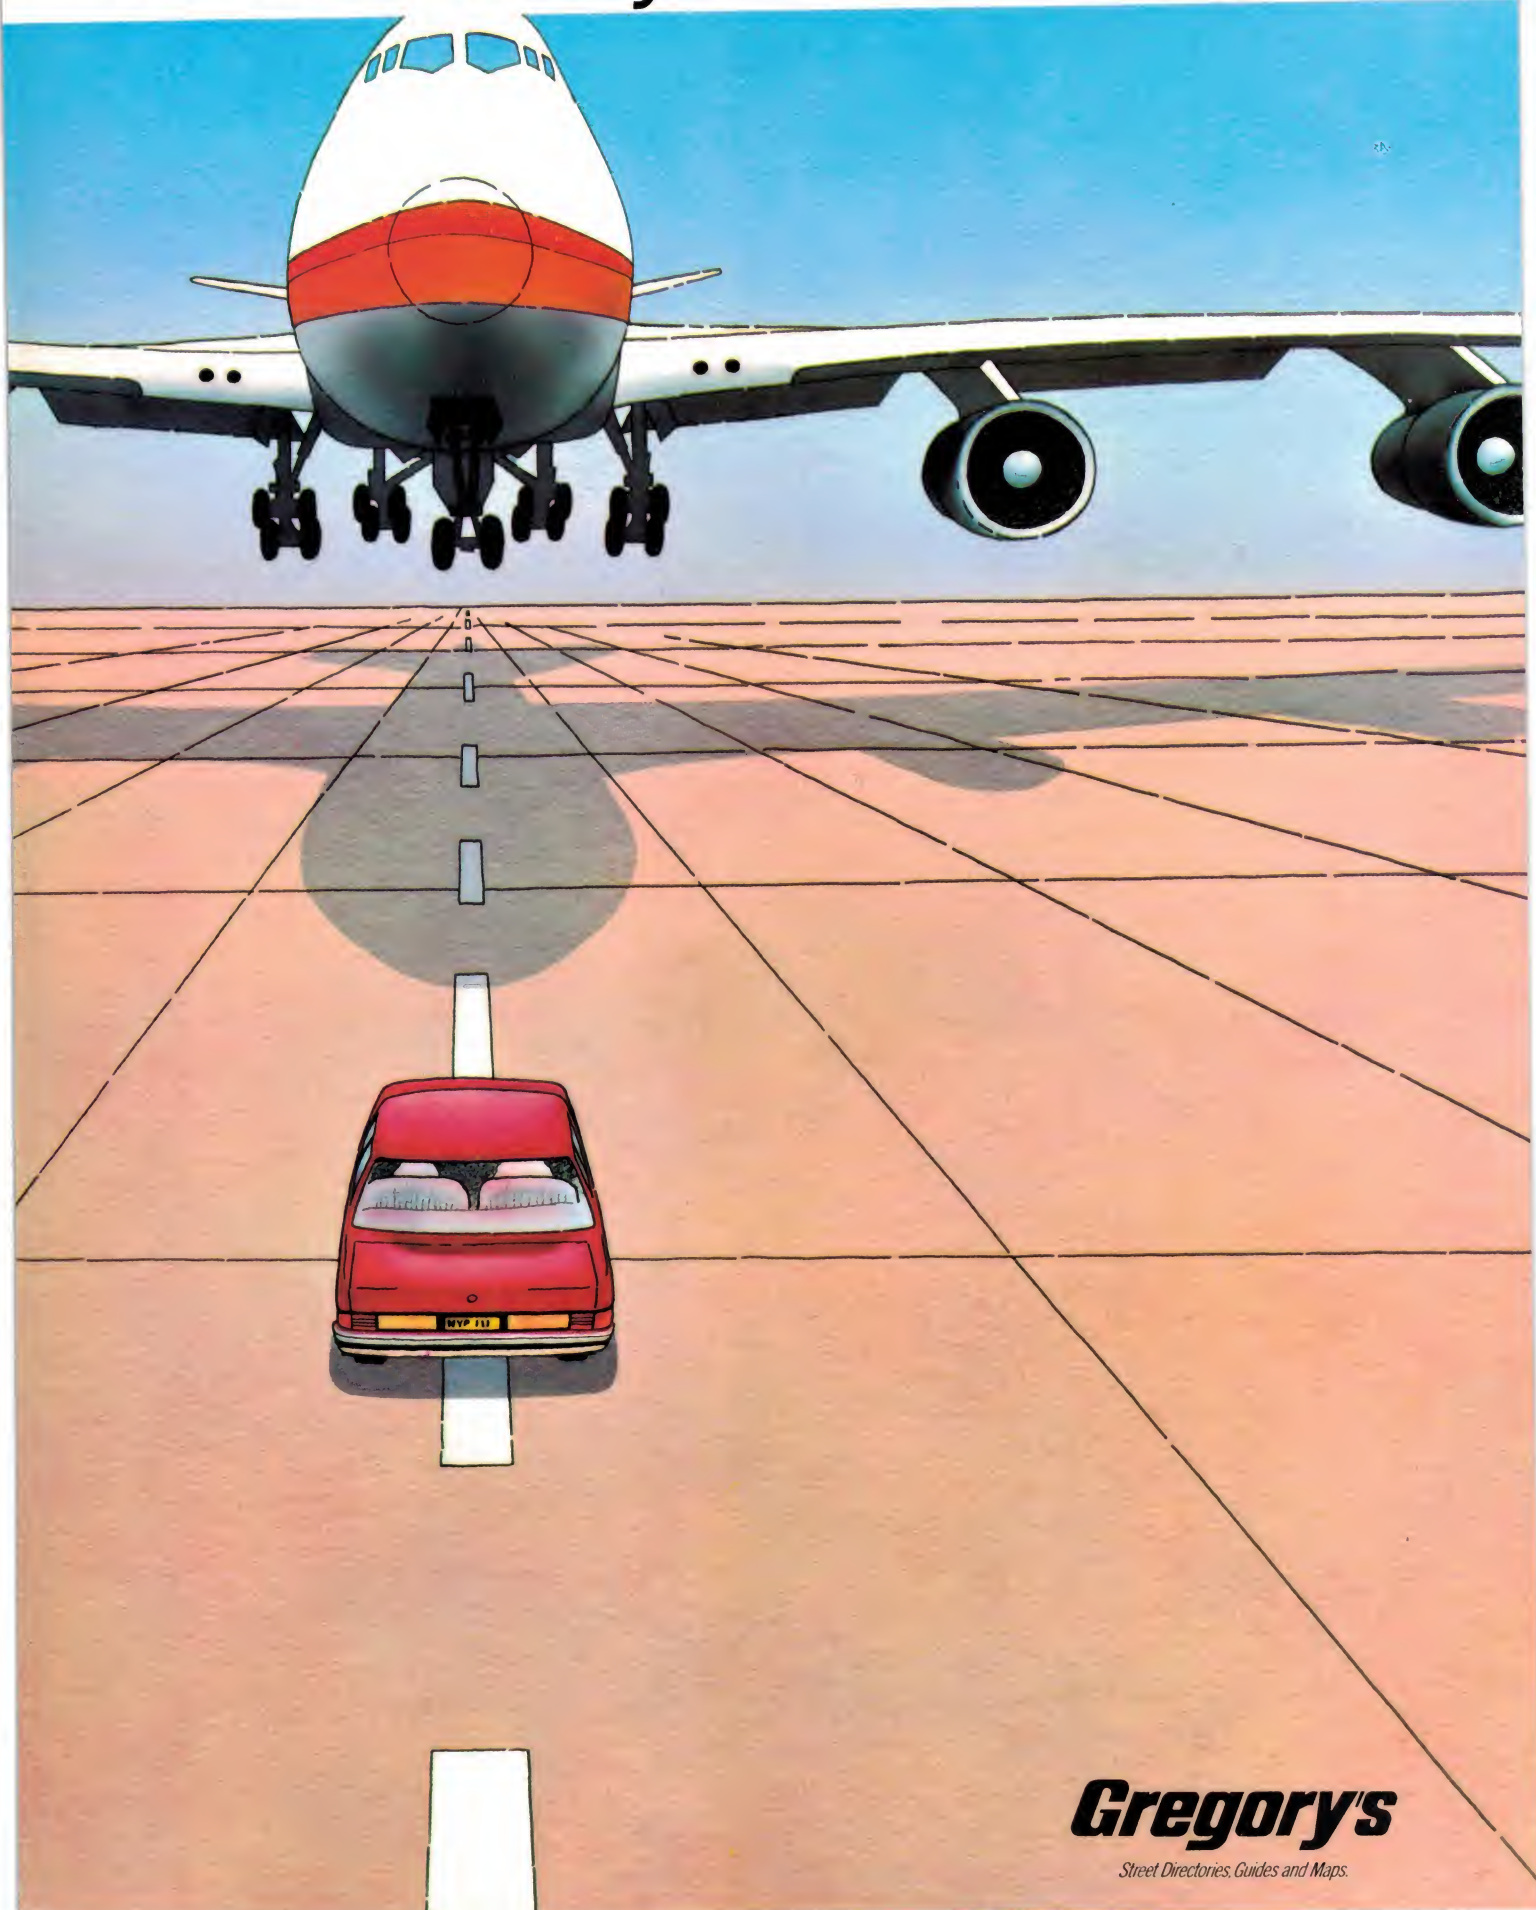

Gregory's

Street Directories, Guides and Maps.

ANNOUNCING A DAISY WHEEL TYPEWRITER FOR YOUR TRS-80 OR SYSTEM 80!!! * ONLY \$1995 *

MICRO-80 has converted the new OLIVETTI ET-121 DAISY WHEEL typewriter to work with the TRS-80 and SYSTEM 80 or any other microcomputer with a Centronics parallel port. The ET-121 typewriter is renowned for its high quality, fast speed (20 c.p.s.), quietness and reliability. MICRO-80 is renowned for its knowledge of the TRS-80/SYSTEM 80 and its sensible pricing

policy. Together, we have produced a dual-purpose machine:- an attractive, modern, correcting typewriter which doubles as a correspondence quality Daisy-Wheel printer when used with your micro-computer.

How good is it? :- This part of our advertisement was typeset using an ET-121 driven by a TRS-80.

77 TRACK
DISK DRIVES
DOUBLE YOUR CAPACITY

DD-7S \$775
Micropolis Floppy Disk, 77 Track, 100% larger capacity than most mini-floppy drives, complete with cable, power supply, chassis, and includes NEWDOS '80.
DD-7 \$649
Same as above but no cable or Newdos '80.
DC-4 \$45
4 drive connector cable.

★ ★ SPECIAL ★ ★
MPI DISK DRIVES
ONLY \$339!!

40 track bare drive for TRS-80. Only requires readily available 5 volt 0.7 amp and 12 volt 1 amp power supply to be up and running. Can be mounted in simple cabinet or used bare.

DISKETTES FOR TRS-80

BASF single side/single density ... \$4.50 ea
BASF double side/double density...\$5.90 ea
VERBATIM 77 track \$6.99 ea
Minimum Order 10

EXATRON STRINGY
FLOPPY

\$352.50 incl p&p

15 times faster than cassette, infinitely more reliable. Completely under computer control, the stringy floppy is easier to use than disks and is a very much cheaper alternative. Will save and load any L2/16K software. Special software also available.

Wafers for Stringy Floppy
\$3.50 ea. Any Size

MICRO-80 MAGAZINE

ANNUAL SUBSCRIPTION ... \$24.00
Monthly Magazine dedicated to TRS-80 and System '80 users. Every issue contains at least 6 new programs, plus problem solving columns, hardware articles, readers' letters, hints, etc., etc.

AUSTRALIAN SOFTWARE

BMON (L2/16K) \$19.95 plus 50c p&p
The ultimate program to assist BASIC programmers.

TOUCHTYPE (L2/4K) \$19.95 plus 50c p&p
22 lessons to teach you to type on your own keyboard and screen!

RPN CALCULATOR (L2/16K & 32K)
\$14.95 plus 50c p&p
Turns your computer into a \$600 calculator. Ideal for Architects, Surveyors, Engineers, Teachers, Scientists, etc.

U-BOAT (L2/16K) \$7.50 plus 50c p&p
You're the Commander, read all the gauges, fire the torpedoes, crash dive, get the enemy before his depth charges get you!!

MMM-1 GAMES PACK (L2/4K)
\$7.50 plus 50c p&p
3 fast moving games - INDY 500, SUB-HUNT, KNEVEL

ANNOUNCING
SYSPAND 80
FOR THE SYSTEM 80
\$119.00

SYSPAND 80 is a self-contained module which connects to the expansion port on your SYSTEM 80 and gives you a CENTRONICS parallel port to drive a printer PLUS the TRS-80 40 line bus. SYSPAND 80 allows you to connect all Tandy peripheral, including the expansion interface, disk drives, MICROTEK MT-32 memory expansion unit and the fabulous EXATRON STRINGY FLOPPY.

Price shown is for a built-up and tested unit. SYSPAND 80 is also available in kit form, call or write for details and price.

TRS-80 MEMORY EXPANSION UNIT
MT-32 ... \$129.00

The MT-32 is manufactured by MICROTEK Inc., USA. It provides a CENTRONICS printer port and sockets for up to 32K of dynamic RAM. It comes complete, ready to plug into the expansion port of your Level II 16K machine. (Will also work with your SYSTEM 80 via SYSPAND 80).

MT-32A without RAM \$149.50
MT-32B with 16K RAM \$188.00
MT-32C with 32K RAM \$243.00

16K MEMORY EXPANSION KIT
ONLY \$59.00 incl P&P

These are prime, branded, 200 ns (yes, 200 ns!) chips. You will pay much more elsewhere for slow, 350 ns, chips. Ours are guaranteed for 12 months. A pair of DIP shunts is also required to upgrade the CPU memory - these cost an additional \$4.00. All kits come complete with full, step-by-step instructions, no soldering is required. You don't have to be an electronic type to instal them.

FREE SOFTWARE OFFER

\$40 WORTH OF SOFTWARE FOR TRS-80 AND SYSTEM '80 WITH EVERY NEW SUBSCRIPTION TO MICRO-80!

Every new subscriber will receive on cassette, ready to load, 3 x Level I and 3 x Level II programs (includes our fabulous household budget program), with a regular retail value of at least \$40.

MMM-2 GAMES PACK (L2/4K)
\$7.50 plus 50c p&p
3 more games with fast moving graphics - TANK, THIEF, SHOOTOUT

DALEK CHASE (L2/16K)
\$7.50 plus 50c p&p
Save Dr. Who from the pursuing DALEKS

SHEEPDOG (L2/16K)
\$7.50 plus 50c p&p

Guide your sheepdog as it rounds up the wandering sheep and drives them into the pen. But don't lose them in the bushes!!

S KEY (L2/16K and up)
\$15.95 plus 50c p&p

Define shifted keys to be BASIC commands, type in graphics directly from the keyboard and see them when you LIST and much more.

THE FABULOUS
NEWDOS 80
IN STOCK NOW!

ND-80 \$149
The disk operating system that gives:

- New basic commands that support variable record lengths up to 4095 bytes long.
- Mix or match disk drives - supports any number of tracks from 18 to 80. Use 35, 40 or 77 track 5" mini disk drives or 8" disk drives, or any combination.
- A security boot-up for basic or machine code programs. User never sees "Dos-ready" or "Ready" and cannot "break" clear screen or issue any direct basic statement including "List" and much, much more

ND-35+ \$99
Newdos+ for 35 track drives
ND-40+ \$110
Newdos+ for 40 track drives

SCOTCH BRAND
PERSONAL COMPUTING CASSETTES

C-10 pack of 10 ... \$26.00 incl. p&p
C-30 pack of 10 ... \$28.00 incl. p&p

To: MICRO-80
P.O. Box 213, Goodwood, S.A. 5034

Please rush me the items checked below:

- ☐ 12 month subscription to MICRO-80 and my free software cassette \$24.00
☐ 12 month subscription to MICRO-80 and the cassette edition, plus my free software cassette \$60.00
☐ The latest issue of MICRO-80 \$2.50


PLUS THE ITEMS LISTED BELOW

DESCRIPTION	PRICE
TOTAL ENCLOSED	

Name

Address

Post Code

 No
welcome here

Please debit my Bankcard \$

Expiry date


Signature ETI

MICRO 80
PRODUCTS

(08) 272 0966

284 GOODWOOD ROAD,

CLARENCE PARK, ADELAIDE

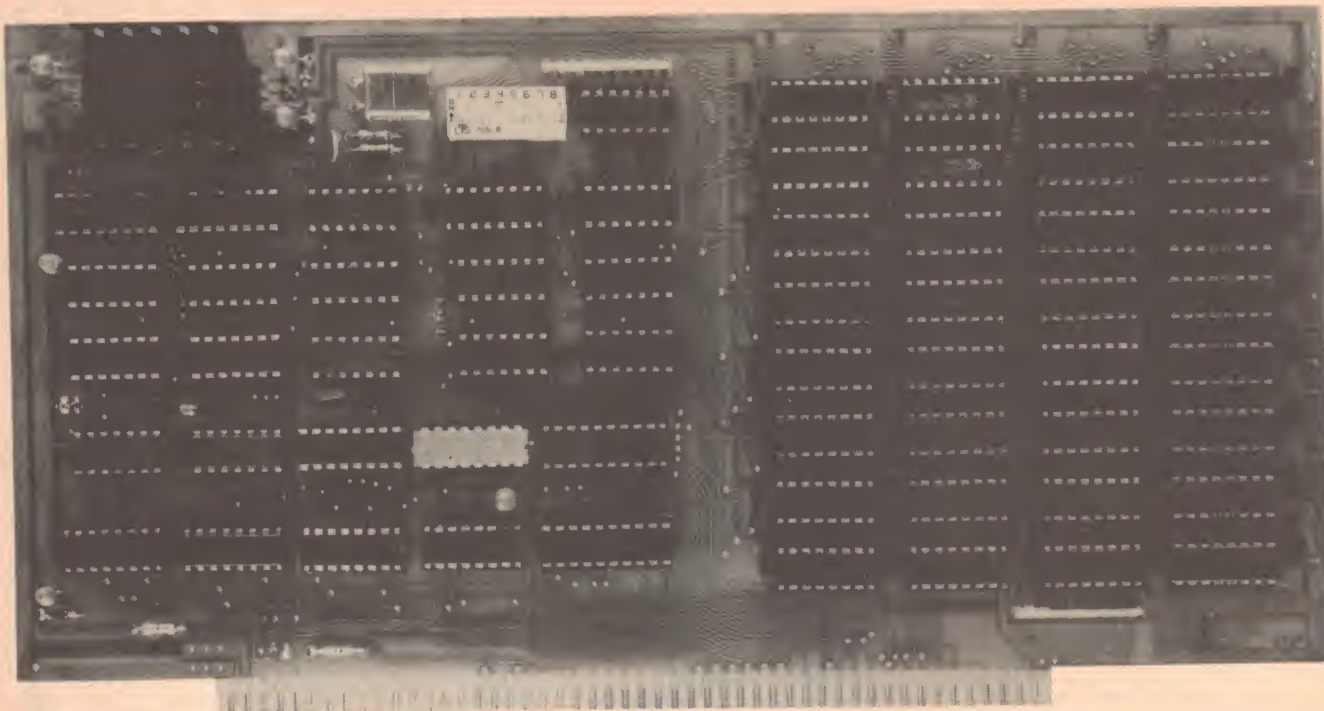

T.C.T. 64 K Dynamic Board

After years of experience with local and imported dynamic boards that simply didn't work satisfactorily, T.C.T. MICRO DESIGN decided to design a dynamic memory board that came closer than ever before to true static performance.

The resulting board will run with virtually any processor, on an S100 bus, running at any speed below 2.5MHz (Z80). A variety of disk systems and DMA devices have been tested and run perfectly.

REFRESHING:

The major difference between this board and others is the manner in which refreshes are triggered. Most current boards refresh when they are told to and when the processor is reset, halted or waited. Doing this does not avoid clashes between refreshes and processor accesses. This is the reason why some memory boards don't work properly with disk drives. Our board instead has counters that trigger a refresh whenever one hasn't been done for a certain time. This avoids sampling extra bus signals, and if a clash between a refresh and a processor access occurs it will be resolved with the special arbitration circuitry on the board. This also means that the processor may be run at as slow a speed as is desired - something that would crash nearly any other dynamic board.

This board has been tested in several systems, based on various disk systems and processors, including Z80, 2650, 8080, 6800 and 68000.

T.C.T. MICRO DESIGN PTY. LTD.
Engineering excellence

FEATURES:

- * Designed for the S100 bus
- * Expandable from 16 to 64K
- * Does not need halt, wait and reset status signals from bus
- * Optimal arbitration between refreshes and memory accesses
- * All timing derived from 25MHz clock
- * Will run at any speed from zero to 2.5MHz (Z80)
- * Arranged as four 16K banks, with independent write protect and disable
- * Supports bank select and phantom
- * Genuine S100 board size, 5.3 by 10.0 inches
- * High quality solder masked and plated through board
- * Excellent manual, including construction and setting up details and a discussion of testing and memory design techniques.

KIT PRICES:

	inc. tax	ex. tax
16K bytes	\$279	\$245
32K bytes	\$349	\$305
48K bytes	\$419	\$365
64K bytes	\$489	\$425
8x4116 (200ns)	\$75	\$66

Add \$60 for assembled and tested.

OEM enquires welcome.

P.O. Box 263 Wahroonga, 2076, N.S.W.

Please add \$10 for post and packing.
Allow two weeks for delivery, we will immediately inform of any unexpected delays.



WIN

A SINCLAIR ZX80 COMPUTER

—with software

Only recently released in Australia, the Sinclair ZX80 Personal Computer is being distributed here by Consolidated Marketing at a recommended retail price of \$295, including the manual. The ZX80 owes its low price to its remarkable design; the whole system is packed onto fewer, newer, more powerful and advanced LSI chips, the makers claim. The ZX80's 1K byte RAM is roughly equivalent to 4K bytes in a conventional computer because the design packs the RAM so tightly. You can add to the memory via the expansion port, giving a maximum potential of 16K. The unit includes a cassette interface and output direct to TV antenna input.

You can win one of these remarkable computers by entering this simple contest. Only five questions to answer !

This contest is jointly sponsored by ETI and Consolidated Marketing — who have generously donated the prize.

And as a special bonus the winner will also receive six packs of innovative and imaginative software. This has been designed and donated by Peter Hartley of Peter Hartley Software in Adelaide.

Six runners-up will also win a pack of Peter Hartley software.

RULES

This contest is open to all persons normally resident in Australia with the exception of members of the staff of Consolidated Marketing, Modern Magazines (Holdings) Ltd, K.G. Murray Ltd, Australian Consolidated Press, Wilkes Pty Ltd and/or associated companies.

Entries should be addressed to ETI/Sinclair ZX80 Contest, Electronics Today Int., 15 Boundary St, Rushcutters Bay, NSW 2011.

Closing date for the contest is 31 January 1981. Entries received within seven days of that date will be accepted if postmarked prior to and including 31 January 1981.

The winning entry will be drawn by the Managing Editor of ETI whose decision will be final. No correspondence can be entered into regarding the decision.

Winner will be advised by telegram the same day the result is declared. The name of the winner, together with the winning answers will be published in the next possible issue of ETI.

Contestants must enter their names and address where indicated on each entry form. Photostats or clearly written copies will be accepted but if sending copies you must cut out and include with each entry the month and page number from bottom of the page of the contest. In other words you can send in multiple entries but you will need extra copies of the magazine so that you send an original page number with each entry.

This contest is invalid in States where local laws prohibit entries.

Entrants must sign the declaration, accompanying this contest, that they have read the above rules and agree to abide by their conditions.

You may enter as many times as you wish but you must use a separate entry form for each entry and include the month and page number cut from the bottom right hand portion of this page. You must put your name and address on the entry form and sign it where indicated.

Please read the contest rules carefully, especially if sending multiple entries.

All entries received by the due date will be placed in a barrel. First all-correct entry then drawn is the winner. Next six are the runners-up.

Permit No: TC 80/1261

• What programming language is used in the ZX80 ?

• How many key entry strokes are required to enter words such as RUN, PRINT, LIST etc. (i.e: how many letters per word) ?

• How many standard graphic symbols are included ?

• Can the ZX80 be programmed to play chess ?

• In which country is the ZX80 made ?

Name

Address

.....Postcode

I have read the rules of the contest and agree to abide by them

Signed

Date

OGURA PRINTER

RO-136E



Basic Specifications:

- Printing speed 120CPS bidirectional
- Character size 7 (length) × 9 (width) (Standard)
- Character type ASCII 128 characters
- 128 (136E) or 64 (80E) special characters can be added as an optional feature
- Character spacing 10 characters/inch
- Line spacing 6 or 8 lines/inch (switchable)
- Form width 5-15 inches (136E)
- 5-9 inches (80E)
- Copies Up to five copies including the original
- Paper feed speed 88m sec/line (6 lines/inch)
- Paper feed mechanism Tractor feed (continuous form)
- A slip may also be used
- Data input 8 bit parallel Centronics compatible RS-232C I/F.
- TTY 20mA current loop I/F. A variety of specifications can be applied by controlling the interface.
- 50/60Hz 100V ±10% 160VA
- Power 13m/m (width) × 13m (length) (Black cartridge)
- Inked ribbon

Graphic Data RO-136G

The printer can print graphic data by controlling printing on a dot basis of up to 960 dots across the page.
Speed — 80CPS.

New Dot Printer Featuring Low Cost, High Performance, and Versatility

The OGURA RO series incorporating a microcomputer, is a low-price, high-performance serial dot printer featuring high reliability and a variety of applications.

It can be used in combination with a microcomputer, a small-scale computer, or as a CRT hardcopy device.

"Ogura RO Series" aims at dispersion of printers.

SME OLYMPIA PRINTER

Why would you want a golfball when you can now have something quieter, faster and less tiring?

The new generation electric typewriter is here! And it doesn't have a golfball. Olympia Whisperdisc. A super-quiet fully electronic typewriter with a simple, trouble-free typing disc to give you an almost perfect image.

A self corrector lets you remove up to eight characters by pressing a single key. The disc can be changed in seconds to a different typeface. The low profile keyboard reduces strain. And, being electronic, Whisperdisc is virtually trouble-free.

SME can now supply the ES100 Typewriter fitted with RS232C Serial Interface. This unit is known as a ES100P, it can interface to all standard computers via a 25-way 'D' connector.

Please contact SME for more information.
\$1950.00



Sm ELECTRONICS
Melbourne: Ph (03) 842 3666
New Tel No. January 1981 (03) 874 3666
Trading hours: 10am-6pm Mon to Fri.

1096 Doncaster Rd, Doncaster East, Vic 3109.
PO Box 19, Doncaster East, 3109. Telex AA37213.
DEALER Canberra — 81-5011, Sydney — 661-9237.

Send 66c in stamps for COMPUTER PRINTOUT CATALOGUE for more details.

ALL PRODUCTS AUSTRALIAN MADE AND EX STOCK (ALMOST).
DEALER ENQUIRIES WELCOME.
Prices and specs. subject to change without notice.

All prices tax free, for retail prices add 15 per cent.

bankcard
welcome here

SME
SYSTEMS

Give name, number, expiry date and signature for mail order sales.

Sm ELECTRONICS
MELBOURNE
Ph (03) 842-3666

Trading Hours: 10am-6pm Mon to Fri.

SME
SYSTEMS

are on the move again


Due to an incredible increase in business, we have been forced to look for larger premises.

Consequently we will soon be moving into a new 4,500 sq. ft. air conditioned office and factory.

For our new phone number and address, watch this space in next months' issue.

Until then we are open for "BUSINESS AS USUAL" at the address at the bottom of this page.

S-100 I/O PORT BOARD



Now with
dual serial
ports

DUAL SERIAL I/O CARD Features:- dual independently controlled serial ports with TTY and RS232 outputs and inputs. Nine programmable parallel ports, crystal controlled baud rates fully buffered and address decoded. Plated through holes & solder resist mask.
Price. Kit \$189. Ass. \$225.

UV EPROM ERASER



New product range. Model LEE/T 15W tube, 120 min timer, up to 40 EPROMS will erase in 10/15 mins. Model MEE/T 8W tube 120 min timer, up to 10 EPROMS will erase in 20/30 mins. Model MEE is same as MEE/T but with no timer. All erasers are fully assembled and have a safety switch.
LEE/T \$125. MEE/T \$105. MEE \$85.

SME
SYSTEMS

1096 Doncaster Rd, Doncaster East, Vic 3109.
PO Box 19, Doncaster East, 3109. Telex AA37213.
DEALER: Canberra - 81-5011, Sydney - 661-9237.

Send 66c in stamps for COMPUTER PRINTOUT CATALOGUE for more details.

ALL PRODUCTS AUSTRALIAN MADE AND EX STOCK (ALMOST)
DEALER ENQUIRIES WELCOME
Prices and specs subject to change without notice.
All prices tax free, for retail prices add 15 percent.

NEW COMPUTER DEMONSTRATION CENTRE NOW OPEN!



117a Henley Beach Rd.,
Mile End S.A. 5031.
43-7981 — 43-8324

Two Adelaide men have formed the new company — Graham Stallard and Jim Pope. Their combined knowledge and experience introduces a more complete service to customers.

Authorised Distributor for:



Computer Systems
and Peripherals.

Full range of business software — excellent after sales service — operator training available.

PET PERSONAL COMPUTER

The completely integrated, low cost, versatile, personal computer for the home.

JUST RELEASED 8000 SERIES 8032 PROFESSIONAL COMPUTER SYSTEM

Basic 4.0; 32K. RAM; with larger 80 column screen.

8050 MINI-FLOPPY

Disc drive with capacity of 1 Megabyte (one million characters).



117a Henley Beach Rd.,
Mile End S.A. 5031
43-7981 — 43-8324

ATTENTION! TRS-80 OWNERS

PROGRAMS

- DEBTORS
- CREDITORS
- INVOICING
- GENERAL LEDGER

MAINTENANCE

Repair and maintenance of boards, drives and printers.

SALE OF CENTRONICS 779 PRINTERS

60 CHARACTERS PER SECOND
FULL 132 COLUMN PRINT ABILITY
96 CHARACTER ASCII SET



NEW OR
USED FROM
\$850

Ring now
92 97699
**THE SMALL
BUSINESS
COMPUTER CO.**
200 Pacific Hwy. Crows Nest. NSW



Back door into BASIC

This is the first in a series of four articles that will explain BASIC programming from first principles, using the familiar pocket calculator as a starting point.

Phil Cohen

I GUESS all of you have used a pocket calculator? Well, you'd be surprised how much it has in common with a computer. The only major difference is that a computer is much more flexible — it does the same things, but more of them.

One thing a computer can do that most calculators can't is repeat a sequence of 'key presses' any number of times. Such a sequence is called a program and writing a program is simply the process of deciding what the sequence of key presses is to be.

Calculators

Let's take a closer look at a simple pocket calculator. It has ten keys with numbers on them and others with 'functions' like +, -, x and =. When you press the keys, complicated electronic circuits inside the machine respond by performing certain actions.

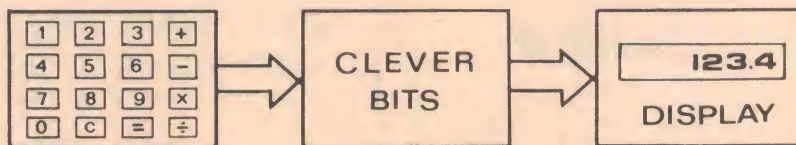


Figure 1. Block diagram of a simple four function calculator.

Figure 1 is a simplified diagram of how the calculator is organised inside. The block in the middle labelled 'clever bits' represents a lot of sophisticated hardware, but it's not necessary to understand how the hardware works to be able to use the calculator.

This simple kind of calculator has no 'memory' facility where you can store numbers for future use. For example, suppose you have a set of numbers and you want to multiply them all by 0.123949. On this kind of calculator you have to key in 0.123949 for every calcu-

lation, which is time-consuming and boring.

Calculators with memory

The next step towards a computer is the calculator with memory, which saves you the tedium of entering the same number over and over again. You can just enter the number once into memory and then pull it out with one keystroke at the relevant part of each calculation.

Figure 2 is a block diagram of a calculator with memory. Its memory can only store one number at a time.

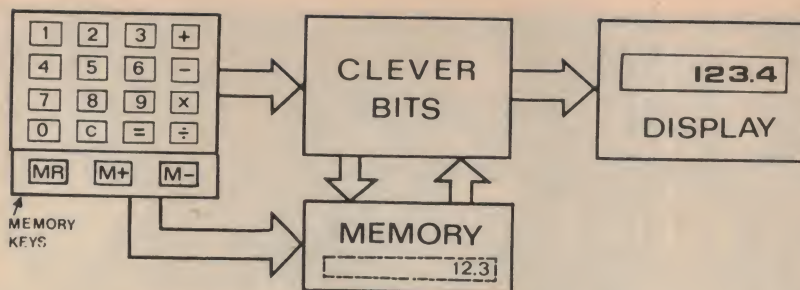


Figure 2. A calculator with memory is a little more complicated.

The memory control keys allow the user to control what the memory does. For example to put the number 0.123949 into memory all you have to do is key in 0.123949 so that it appears on the display, then press the M+ key, which enters the contents of the display in the memory. To 'recall' or 'read' the memory contents at any time during a calculation, you press the MR (Memory Recall) key. This is probably all very familiar to most of you, but it's worth going through it all because it ties in with what I'm going to say later about computer memory.


Some calculators have more than one memory, allowing different numbers to be stored in different places. In fact, some calculators have *hundreds* of memories, each of which can be independently 'written to' or 'read from'.

Programmable calculators

Although I said earlier that one of the differences between a calculator and a computer is that the computer can repeat a sequence of steps any number of times, there are in fact many calculators on the market which can also perform this feat.

So how do you tell a computer from a calculator? The answer is, "These days it's not easy." In fact, in a number of cases, the two terms overlap.

We saw how a calculator with memory is useful when multiplying a whole set of numbers by a constant value. Well, what if you wanted to take the same set of numbers and for each one multiply by 15.698, subtract 34.697 and find the square root of the answer? You could start by putting 15.698 and 34.697 into two memories in the machine, but

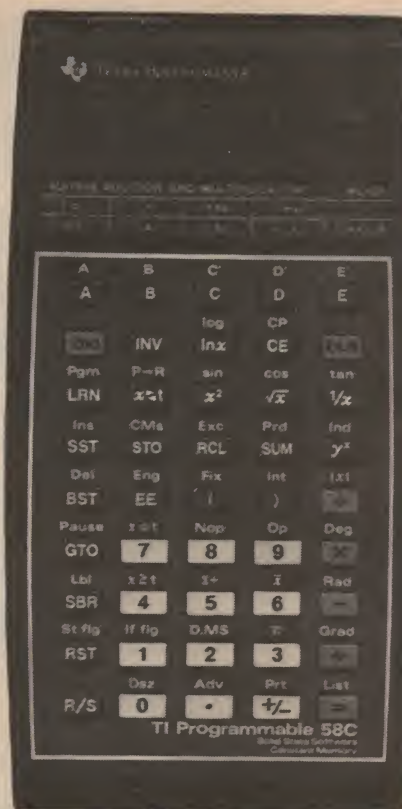

Today's programmable calculators can do jobs which once needed a large computer.

you would still be left with a formidable number of key presses to get the answer.

To get away from all the repetition involved in such a calculation, the solution is to use a programmable calculator. This is a machine which can 'remember' a sequence of steps (such as $x \times 15.698 - 34.697 \sqrt{}$). You program the calculator with the sequence of steps you want it to carry out, then for each number in the set, key in its value and press the RUN key.

Pressing the RUN key will cause the calculator to go through the programmed sequence once. The great thing about this system is that, having got the answer for the first number in the set, you simply key in the next number and press RUN again. The calculator will then apply the same sequence of calculation steps to the new number.

The program is fed into the calculator in much the same way as a value is fed into a memory — you press the PROGRAM key, which tells the machine you are about to program it, then simply press the desired key sequence. This enters the steps into a special group of memories in the calculator and when the RUN key is pressed this 'program memory' is read out, one step at a time, starting at the beginning and working through to the end of the sequence you originally keyed in. ▶



The humble office calculator has several features in common with a computer.



A high powered professional microcomputer like this Hewlett-Packard HP85 is basically similar to the simplest home computer.

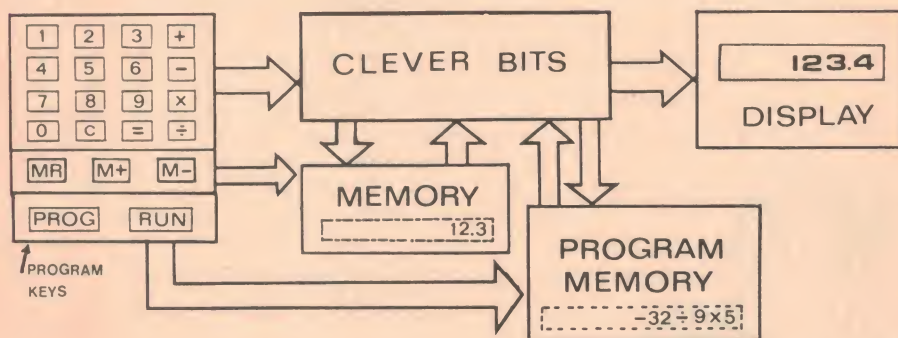


Figure 3. Programmable calculators have two distinct types of memory.

Programming a computer is exactly the same as programming a calculator. You fill up part of the memory with a sequence of steps (the program) which you want the machine to carry out.

The keyboard of a computer is a bit different to that of a calculator. Because the number of functions which a computer can perform is literally without limit, most computers use a keyboard more like that on a typewriter. For example, rather than pressing a key marked RUN, you press R, then U, then N. All the functions of the computer can

Figure 3 shows a simplified block diagram of a programmable calculator. By now we're getting close to a computer.

Computers

Figure 4 is a much simplified block diagram of the inside of a computer. As you can see, the program memory and the number memories have been lumped together into one area, which can be used for both purposes. In fact the computer will, at any given time, be using part of the memory for program storage and part for number storage. This is a very useful flexibility because some applications need a lot of program storage and very little number (or 'data') storage, while others need the opposite.

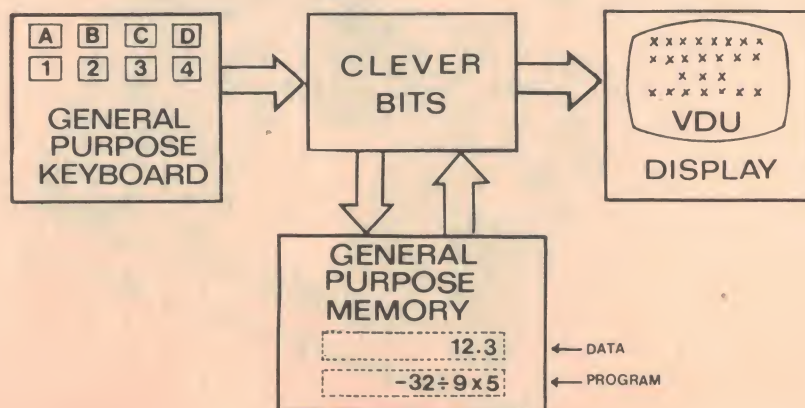


Figure 4. A computer has one large and versatile memory for both program and data.

now be designated by different 'key-words' or 'reserved words', instead of using one key per function like a calculator.

This sort of keyboard has other advantages too. The computer can not only store numbers and programs in its memory, it can also store letters — and these can be entered through the keyboard. This means that the machine can be used as a word processor — a machine that allows text to be typed in and then edited while still on the machine, so that it can be printed out free of errors and arranged in all sorts of different formats.

A computer display is different too. In general it's on a screen like a TV, which is usually called a Visual Display Unit (or VDU). This shows letters, numbers and symbols and usually has some sort of 'graphics' capability to enable the user to draw lines on the screen for tables, graphs and so forth. One of the problems with a programmable calculator is that you can't see the whole program at one time. With a VDU display, you can see whole pages of the program.

Languages

Naturally if you type the wrong word into the computer it won't do what you want it to do. For example, if instead of typing RUN you typed START, the machine would be confused. Computers can only understand certain words, just as a calculator only has so many keys. The vocabulary of a particular computer depends on what 'language' it uses. A language in computer terms means almost exactly the same as in human terms — it's an agreed way of writing things, which means the same to everyone.

The grammar of a computer language defines what order the words can be put in. For example, you can put $3 + 4 =$ into your calculator and get the right answer, but you can't put $= 3 + 4$. Grammar is known as 'syntax' in computer jargon. Each different computer language has its own syntax rules, which govern the way the computer will interpret what is typed into it.

The three remaining articles in this series will deal with the syntax of BASIC, which is currently the commonest language for home computers.

Computer physiology

Before we get into talking about how to write programs, it's a good idea to say

something about what the average home computer consists of and how it works. It's not necessary to understand the 'anatomy' or detailed internal workings of a computer to be able to recognise the major functions, which we might call the computer's 'physiology'.

First of all, every computer has some kind of keyboard. These come in a variety of shapes, sizes and styles, but most of them look very much like typewriter keyboards. One difference that is easily noticed is the RETURN key. This corresponds to the carriage return on a typewriter and is usually found at the right hand end of the keyboard. Pressing the RETURN key has the effect of making the computer read what the user has just typed in. This allows you to ►

COMPUTER LANGUAGES

Various different computer languages are in common use for different purposes. The table below lists the principal languages and what they are used for.

LANGUAGE	EASE OF LEARNING	SPECIAL USES	COMMENTS
ALGOL	Medium	Scientific	Needs a fairly large machine
APL	Difficult	Scientific	Uses many special characters — most machines can't handle it
BASIC	Easy	Learners	Very common in home computers
COBOL	Medium	Accounting	Designed for efficiency, not ease of use
FORTRAN	Medium	Engineering	Very common in large machines
PASCAL	Fairly easy	General purpose	BASIC's only rival in home computers — but BASIC is easier to use

SWITCHING POWER SUPPLIES

The California DC range of switching regulated power supplies is now available in Australia. The LR Series of open frame supplies provide size and weight savings over linear, series regulated supplies. Conservatively rated for long life, the LR Series was designed for use in computers, computer peripherals and industrial controls. They provide power for floppies, tape drives, memories and microprocessors. The range includes versions with up to four independent output voltages.



Standard features include:

- Plus/Minus 20 percent line tolerance
- Inrush limiting on turn-on
- Individual output regulation of 1 percent
- Individual output current limiting with foldback
- Thermal protection
- 50 millivolt P-P output ripple and noise
- 0-40 degrees C convection cooling without derating
- 70 percent minimum efficiency at full load

The power supplies range in price from \$170 to \$330.



MicroPro Design Pty. Ltd.

PO Box 153, North Sydney, NSW 2060. Phone (02) 438-1220.

Sinclair ZX80

Australia's first
under \$300 computer

\$295
INCL. ZX80 BASIC
MANUAL



With Sinclair ZX80, for just \$295 you get everything you need including leads for direct connection to your own cassette recorder and television. The ZX80 really is a complete, powerful full-facility computer matching or surpassing other personal computers costing much more.

Two unique and valuable components of the Sinclair ZX80: the Sinclair BASIC interpreter and the Sinclair teach-yourself BASIC manual.

The ZX80's 1K byte RAM is roughly equivalent to 4K bytes in a conventional computer because the ZX80's brilliant design packs the RAM so much more tightly. (Key words occupy just a single byte). You can add to the memory via the expansion port, giving a maximum potential of 16K.

Now available from:

EMONA ENTERPRISES PTY. LTD.
CBC Bank Bldg., 661 George Street,
Haymarket, Sydney. (02) 212-4815.

EMTRONICS

649 George Street, Sydney.

Order Form: Emona Enterprises P/L,
PO Box 188, Coogee, NSW, 2034.

Ready-assembled Sinclair ZX80

Personal Computer, excl. mains

adaptor\$295.00

Mains Adaptor\$16.00

Memory Expansion Board(s)

takes up to 3K bytes.....\$28.50

RAM Memory chips — standard

1K byte capacity (6 IC's).....\$10.00 ea.

TOTAL.....\$

Please send further information and
prices:

Sinclair Measuring Instruments ☐
SEW Test Instruments ☐
SEW Panel Meters ☐
Goodwill Test Instruments ☐
Oscilloscopes ☐
Audio Generators ☐
AC Millivoltmeters ☐
RF Attenuators ☐

I enclose cheque/Bankcard. Total \$

.....

Name.....

Address.....P'code.....

type a full line of instructions, then read them off the screen to make sure that they are correct before committing yourself by pressing RETURN.

Some computers have a second keypad to the right of the typewriter-style one. This second keypad looks like a calculator keypad — it contains the numbers from 0 to 9. It's there because the standard typewriter layout is not ideal for keying in numbers — all of the number keys are in a row along the top of the keyboard.

When it comes to displays, the market is split between the more expensive machines, which have their own video screen built in, and the cheaper ones which plug into the back of a domestic TV.


A normal screen layout is something like twenty rows, each containing about sixty characters (a character is a letter, a number, a symbol or a space). All but the very cheapest computers have some

method of storing programs so that they can be recalled when you want to use them again.

For example, suppose you spent a whole afternoon writing a program to calculate compound interest. If you knew that you were going to need it again a week later you *could* go to the trouble of writing it down line by line so that you could type it in again the next week. But this would be time-consuming and there would always be the possibility of making a mistake.

A much easier way is to design the machine so that it can take a program which is stored in it and convert it into a sequence of musical notes that can be recorded on a domestic cassette recorder. When you play back the cassette, the computer will listen to the notes and reconstruct the program from them. Some machines have cassette recorders built in, while others require the use of an external recorder.

THE ANATOMY OF A TYPICAL HOME COMPUTER

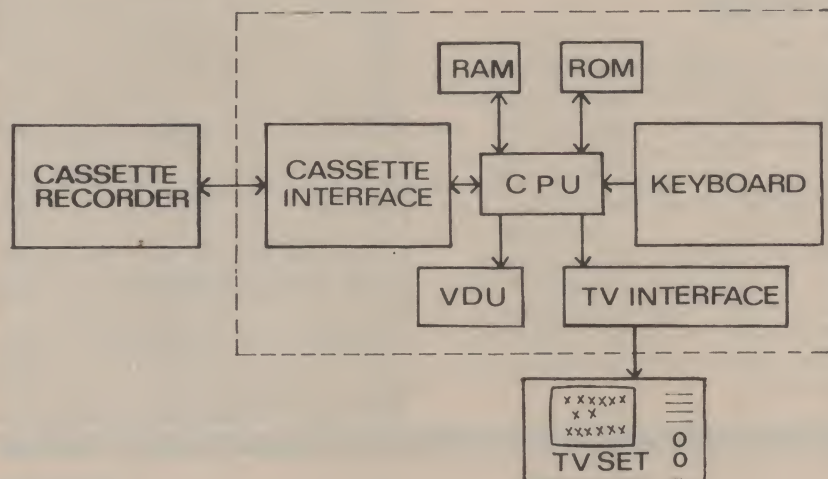

CPU stands for **Central Processing Unit**, home of the famous microprocessor. This part of the machine does all the thinking and corresponds to the 'clever bits' in a calculator.

RAM or **Random Access Memory** is where the computer stores all the numbers and programs that the user enters.

ROM means **Read Only Memory**. This is where the language is kept, in the form of an interpreter program that translates BASIC into a 'machine code' that the computer can understand. Data in ROM is permanently stored — it does not disappear when the power goes off, and it cannot be altered.


VDU stands for **Visual Display Unit**, a screen on which information is displayed in a form that humans can read. On most computers the VDU is fairly autonomous — it does not need to be refreshed all the time by the CPU, but can store a string of characters in its own memory and display them until the CPU tells it to change.

The Cassette Interface translates messages from the CPU into a code of audio tones suitable for recording on a cassette. It can also translate these tones back into machine code when the CPU needs the information again.

E-X-P-A-N-D YOUR SYSTEM 80



AT LAST! THE NEW SYSTEM 80 S-100 EXPANSION INTERFACE

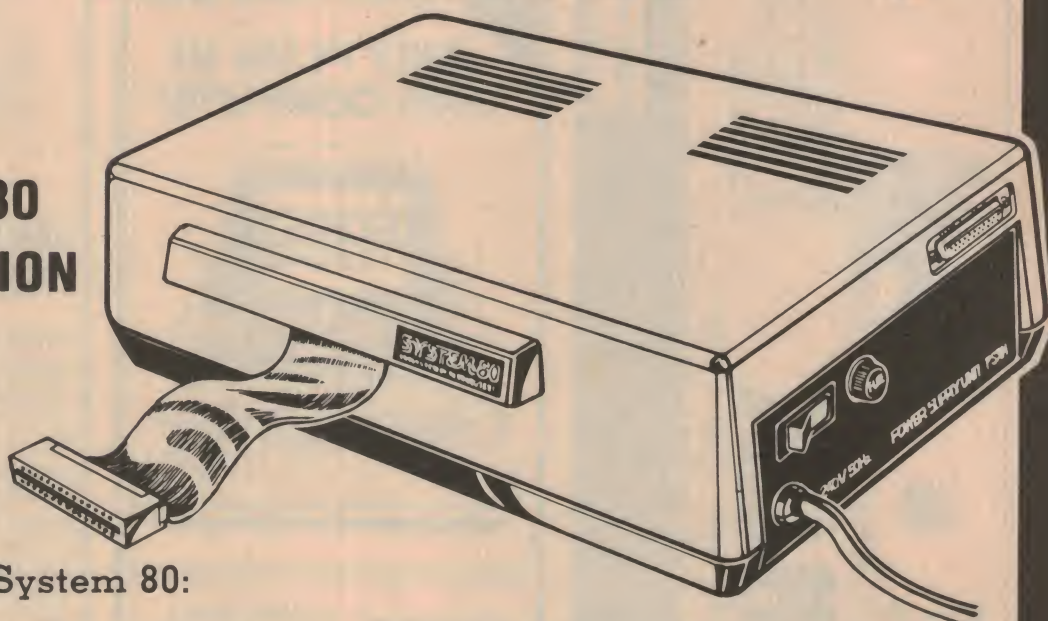

Here's what
it can do for your System 80:

- Give you a standard Centronics parallel printer port. (Suits most printers including our Dot Matrix (X-3255) and Daisy Wheel (X-3265) printers.
- Give you an RS-232C port with full 'handshaking' logic for connection to modems, etc.
- Give you the option of fitting extra memory: fit a RAM CARD with another 16K or 32K (available separately) — plus you can still fit another S-100 add-on board.
- Give you a floppy disk controller (up to four drives) with external data separator for improved reliability
- Gives you the ability to use a cheap teleprinter instead of a parallel printer. Save a bundle!
- Gives you S-100 compatibility: so you can use many of the peripherals from hundreds of manufacturers: why be tied to one source of supply?

AND IT'S \$\$\$\$ CHEAPER THAN TANDY!

Apart from the massive savings on the computer itself, our expansion unit is over \$119 less than Tandy's (theirs is \$618.95 including RS-22C interface). And it offers you much more!

Freight \$6 Below cost
anywhere in Australia

Cat X-4010

ONLY
\$499⁰⁰

Terms available to
approved applicants

16K RAM CARDS TO SUIT S-100 INTERFACE

Comes with 16K fitted; with room for another 16K. You can have a 48K computer!
And the savings can be massive!

Card (including 16K RAM)
(Tandy charge \$220.00!!) **X-4016 \$199.00**

Second 16K RAM
(Tandy charge \$220.00!!) **X-1186 \$59.95**

IF ALL YOU WANT IS A PRINTER INTERFACE...

We've got this economical parallel interface allowing you to run any Centronics-type printer direct from the System-80 — no expansion interface needed. And again, the price is a big saving over Tandy's!



Printer Interface:
Cat X-4013

\$49⁵⁰




Connecting Cable:
(suits Printer Interface
or S-100 Interface)

\$39⁵⁰

Cat X-4014

DICK SMITH
Electronics



**SEE OUR OTHER ADS FOR
FULL ADDRESS DETAILS**

COMMODORE • DAM

We also handle
 • TREND/COM
 • ETONE
 • MOTOROLA
 • PLESSEY
 • AUDITEC

MICROCOMPUTERS, PERIPHERALS, SOFTWARE AND ACCESSORIES


TRIO • B&K

OSCILLOSCOPES, GENERATORS AND TEST GEAR

COMPARE OUR PRICES ON
 THESE GREAT PRODUCTS
 TO GET REAL VALUE FOR
 YOUR MONEY

EDIBLE ELECTRONICS

50 PARK STREET,
 ABBOTSFORD, VIC. 3067.
 PHONE (03) 41-5708.



THE MICROCOMPUTER HOUSE PTY. LTD.

19 William Street, Alexandria,
 NSW 2015. Phone (02) 699-4334.

**JUST PLUG IN
 AND COMPUTE!**



PET PERSONAL COMPUTER

**USER 8K
 USER RAM
 CASSETTE
 MONITOR**

\$999 complete

Call in and see our

Microcomputer House

- Specialised custom software for all your business applications
- Software development
- Conversion from 16K to 32K
- Sound units
- Exciting range of executive furniture for microcomputers from \$285.00
- Extensive range of technical publications for 6502
- All microcomputer supplies

Sole NSW agents for
DATASOFT

- Business programmes covering a wide variety of standard business applications — accounts, estate agent pack, hotel database, portfolio management, Wordpro II and III
- Games and simulations — fast moving, quick thinking, exciting. See our extensive range.

TEACH YOUR PET NEW TRICKS
 Select your software and try now.

Computer Country Pty. Ltd.

"THE MICROCOMPUTER PROFESSIONALS"

Thinking of purchasing a microcomputer system or adding to the one you already have? Make a good investment — invest a little bit of time to talk to the professionals at Computer Country. Remember the quality of the after-sales hardware service and continual after-sales software and hardware advice you get is just as important as the price of the system you buy. Come and have a chat with the professionals of Computer Country just once and you'll realise how much help we can be in enabling you to get the most out of your microcomputer system.

Computer Country stocks a wide range of microcomputer hardware including the Apple, Northstar, Commodore, Texas Instruments, NEC, Impact Data and many more. We carry a wide range of software for many systems including the TRS-80. We can also help you in customising software for your specific application.

Our service department not only completely backs up all hardware purchased from us, but invites enquiries from those who have purchased elsewhere and have hard-to-fix problems.

**MAKE A SMART MOVE
 — COME TO**


*Computer
 Country
 Pty. Ltd.*

**338 QUEEN STREET,
 MELBOURNE, VIC 3000
 (03) 329-7533**

NEW!

"THE BIG BOARD" OEM - INDUSTRIAL - BUSINESS - SCIENTIFIC SINGLE BOARD COMPUTER KIT! Z-80 CPU! 64K RAM!

NEW!

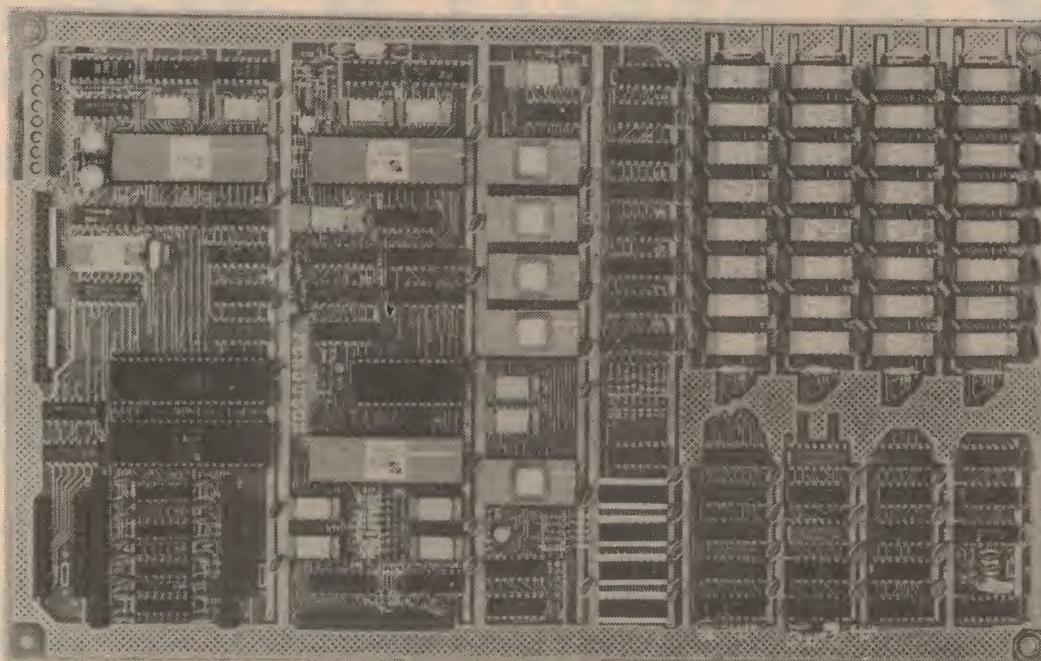

THE FERGUSON PROJECT: Three years in the works, and maybe too good to be true. A tribute to hard headed, no compromise, high performance, American engineering! The Big Board gives you all the most needed computing features on one board at a very reasonable cost. The Big Board was designed from scratch to run the latest version of CP/M*. Just imagine all the off-the-shelf software that can be run on the Big Board without any modifications needed! Take a Big Board, add a couple of 8 inch disc drives, power supply, and an enclosure; and you have a total Business System for about 1/3 the cost you might expect to pay.

\$695.00 (64K KIT
BASIC I/O)

SIZE: 8 1/2 x 13 1/2 IN.
SAME AS AN 8 IN. DRIVE.
REQUIRES: +5V @ 3 AMPS
- 12V @ .5 AMPS.

FEATURES: (Remember, all this on one board!)

64K RAM

Uses industry standard 4116 RAM'S. All 64K is available to the user, our VIDEO and EPROM sections do not make holes in system RAM. Also, very special care was taken in the RAM array PC layout to eliminate potential noise and glitches.

Z-80 CPU

Running at 2.5 MHZ. Handles all 4116 RAM refresh and supports Mode 2 INTERRUPTS. Fully buffered and runs 8080 software

SERIAL I/O (OPTIONAL)

Full 2 channels using the Z80 SIO and the SMC 8116 Baud Rate Generator. FULL RS232! For synchronous or asynchronous communication. In synchronous mode, the clocks can be transmitted or received by a modem. Both channels can be set up for either data-communication or data-terminals. Supports mode 2 Int. Price for all parts and connectors: **\$95**

BASIC I/O

Consists of a separate parallel port (Z80 PIO) for use with an ASCII encoded keyboard for input. Output would be on the 80 x 24 Video Display.

24 x 80 CHARACTER VIDEO

With a crisp, flicker-free display that looks extremely sharp even on small monitors. Hardware scroll and full cursor control. Composite video or split video and sync. Character set is supplied on a 2716 style ROM, making customized fonts easy. Sync pulses can be any desired length or polarity. Video may be inverted or true.

FLOPPY DISC CONTROLLER

Uses WD1771 controller chip with a TTL Data Separator for enhanced reliability. IBM 3740 compatible. Supports up to four 8 inch disc drives. Directly compatible with standard Shugart drives such as the SA800 or SA801. Drives can be configured for remote AC off-on. Runs CP/M* 2.2

FOUR PORT PARALLEL I/O (OPTIONAL)

Uses Z-80 PIO. Full 16 bits, fully buffered, bi-directional. User selectable hand shake polarity. Set of all parts and connectors for parallel I/O: **\$45**

REAL TIME CLOCK (OPTIONAL)

Uses Z-80 CTC. Can be configured as a Counter on Real Time Clock. Set of all parts: **\$25**

PFM 3.0 2K SYSTEM MONITOR

The real power of the Big Board lies in its PFM 3.0 on board monitor. PFM commands include: Dump Memory, Boot CP/M*, Copy, Examine, Fill Memory, Test Memory, Go To, Read and Write I/O Ports, Disc Read (Drive, Track, Sector), and Search. PFM occupies one of the four 2716 EPROM locations provided. It does not occupy any of the 64K of system RAM!

CP/M* 2.2 FOR BIG BOARD

The popular CP/M* D.O.S. modified by MICRONIX SYSTEMS to run on Big Board is available for \$150.00.

TERMS CASH CHEQUE OR BANKCARD (MIN \$100 DEP)

ALL PRICES PLUS TAX IF APP
DELIVERY 3-8 WEEKS ON ORDER

REGISTERED PACK & POST \$5.00



RITRONICS WHOLESALE
425 HIGH ST., NORTHCOTE VIC
481 1923 489 7099 PO BOX 235

Bankcard Mail Orders Welcome

Please debit my Bankcard

Bankcard No

Expiry Date

Name

Signature

AT LAST...

THE SYSTEM 80 IS REALLY A SYSTEM!

NOW YOU CAN BUILD YOUR SYSTEM 80 INTO A SUPERB COMPUTER SYSTEM...

This is Australia's fastest selling microcomputer: the superb System 80 available only through Dick Smith Electronics (& authorised re-sellers).

However, until now, there has been a problem. The System 80 hasn't really been a system at all. Like a car without a tow-bar: useful, but limited in what you could do with it.

Now all that has changed: we're proud to announce the release of the System 80 Expansion Interface. The System 80, through its S-100 expansion interface, now has the potential to be used with hardware and software devices from over 200 manufacturers. S-100 is fast becoming the industry standard, which means you aren't tied to any single one supplier for add-ons. A single supply source means that prices can — and usually are — sky-high because there is no competition.

So now we expect the System 80 to really boom — not just to hobbyists, who've had it all their own way until now — but to businesses, to students, to housewives, to industry... There are virtually no limits to the System 80 system. All it takes is imagination.

And don't forget: software requirements for the System 80 are virtually the same as for the TRS-80: so most of the thousands of programs written for it will also run on your System 80 system!



**SAVE
HUNDREDS OF
DOLLARS OVER EQUIVALENT
COMPUTERS AND HARDWARE!**

FROM ONLY \$695⁰⁰ (4K RAM, LEVEL II Cat X-4003)

16K RAM, LEVEL II \$750⁰⁰
MODEL (Cat X-4005)


BUDGET MONITOR

The System 80 will run with any TV set: but in case you need a monitor, check this one out! P.S. This monitor will also work with most other micro-computers. Compare our prices and **SAVE!**

USE WITH
ANY
COMPUTER!

\$149⁵⁰

Cat X-1196



NEW SYSTEM 80 SOFTWARE —

FOR FUN & EDUCATION

Here are five recently released software tapes for the System 80 (also suitable for the TRS-80 Level II). They're fun to play and they're educational, too.

X-3688 "DEATH TRAP"


In this fast-moving realtime graphics game you have to control the motion of a constantly-moving point on the video screen and avoid randomly-appearing "mines" until an "escape window" appears. You can't cross your own trail, or hit the sides of the screen either. If you escape, you get further tries — only it gets tougher! Has sound effects. Requires 16K.



\$9.95

X-3692 "SPEED READING COURSE"

A set of programs supplied on two cassettes, designed to help readers of all-ages to improve their reading skills. The programs have been developed from the West Australian Reading Development Scheme. Requires 16K.



\$19.95

X-3694 "LEARNING FUN 1: SCURVE INVADERS"


Combines basic maths drill with the ever-popular "Space Invaders" game. Before being able to take each shot the player feeds in the "correct data". Sound effects, three levels of difficulty. Requires 16K.



\$9.95

X-3696 "LEARNING FUN 2: HANGMAN/CONCENTRATION"

Two programs. Hangman is complete with animated graphics "man" getting hung. The words chosen by either the program or a second player. Concentration: two players or teams have to match prizes behind numbers on the screen, then try to guess the mystery food word. Requires 16K.



\$9.95

X-3698 "LEARNING FUN 3: ALPHABET COUNTDOWN/RHYME TIME"

In Countdown sets of words taken at random from a large group must be placed in alphabetic order. Rhyme Time displays a series of unfinished rhymes, and the player has to type in the missing word from the clues given in the rhyme itself. Requires 16K.




\$9.95

BARGAIN PRICED MINI DISK DRIVE

\$200 less than Tandy's equivalent! You'd pay over \$1000 more from Tandy for a 4-drive system!

This incredible drive is world-famous Pertec brand; offers higher capacity than Tandy drive and will work with System 80 or TRS-80. Ask for more info. at your nearest Dick Smith store!



X-3230

\$379

DISK PRICES TUMBLE!

Unbelievable prices for either hard or soft sector mini diskettes. Suit virtually all disk drives available. Buy from Dick and save a fortune!

Hard Sector (X-3505)
Soft Sector (X-3510)
Trade enquiries
welcome

WERE \$5.95 EA! NOW:
1 - 10: \$4.95
10 - 100: \$3.95
100 UP: \$3.50


ITOH 8300P BUDGET PRINTER

For budget printing, you can't go past this one! Uses standard tractor-feed paper, gives high quality print from its 7x5 dot matrix. Up to 240mm paper, prints 125 chars/sec. For either System 80 or TRS-80. Cat X-3255.

40/80/132 CHAR/LINE

Uses Printer interface
and cable below

\$970




FAN-FORM COMPUTER PAPER
TO SUIT ABOVE PRINTER. 2000 SHEETS.

Cat X-1189 **\$35.00**

LETTER QUALITY DAISY WHEEL PRINTER

For top quality print, try this: it's over \$300 cheaper than Tandy's daisy-wheel, and is capable of proportional printing! Limited stocks

Takes standard
stationery!



Cat X-3265

\$1995⁰⁰

PROGRAM CASSETTES

Popular C-10 computer cassettes (just the right size for programs!) with computer-quality tape. Suitable for all 'compact cassette' type units (which everyone uses!) Cat X-3500

\$1⁹⁵



SAVE A FORTUNE ON MEMORY IC'S

Were almost \$100 more twelve months ago! Fast 250nS 4116 RAMs, for upgrading your 4K or 8K to 16K, 16K to 32K or 32K to 48K. 8 IC's in pack. With full instr. Cat X-1186



\$59⁹⁵

Also available individually.
Cat Z-9310 \$7.90 ea.

DON'T NEED FULL S-100 EXPANSION?

Use this parallel printer interface if you don't need full S-100 expansion. Save a bundle! Uses similar connecting cable to S-100 interface

\$49⁵⁰

PRINTER CABLE Cat X-4013

Fitted with edge connector at one end, 57N-36 plug at other: suits virtually all Centronics-type printers. Use with either S-100 interface or parallel printer interface.

\$39⁵⁰

Cat X-4014

SOUND OFF

Add sound to your System 80 programs! Includes amp, programs and full instructions. You can add sound to existing programs too! Also suits TRS-80.



\$19⁵⁰

Cat X-3648

MICROSOFT™ EDITOR/ASSEMBLER PLUS!

Editing, assembling & debugging power you've never had before! Equivalent of Tandy's Editor/assembler and T-bug products but in one package and at less than half the price! And it's far more powerful! Suits System 80 & TRS-80.




\$39⁹⁵

Cat X-3680

LIGHT PEN BARGAIN!

The best value around. Gives your System 80 or TRS-80 an eye. Easy to use, has simple programs

\$9⁹⁵



COMPUTER HOT LINE ...

Want to know more about our computers. Or our software programs. We'll set up a special computer hot line just for you. Call at 888 2002. M-F 10PM-5PM. Sat 10AM-4PM.

888 2002

SOFTWARE for System 80 or TRS-80 GAMES AND EDUCATIONAL SOFTWARE CURRENTLY AVAILABLE

TIME TREK **\$17.95**
You're boldly going where no man has gone before. Mind you, those pesky Klingons attack you from time to time, so you'll need fast reflexes as well as sharp wits. Nine levels of difficulty. Cat X-3650

STIMULATING SIMULATIONS **\$17.95**
No less than 10 different games all fascinating and original. An Auction, Forest Fire, Monster Chase, Nautical Navigation, Lost Treasure, Business Management, Gone Fishing, Rare Birds, Space Flight and Diamond Thief. Cat X-3652

ELECTRIC PAINTBRUSH **\$17.95**
This is a special machine language graphics interpreter program, which lets you program dazzling graphics displays using simple high-level commands. Easy—and fun! Cat X-3654

BRIDGE CHALLENGER **\$17.95**
Keen on Bridge? This game never gets tired of playing with you. Ideal for practising and improving your level of play—whether you're an expert or just a beginner. Needs a 16K machine. Cat X-3656

MICROCHESS **\$22.50**
Think you're a wizz at chess? This program will put you to the test! But think out your moves carefully: the computer is out to beat you! One of the top selling chess programs in the USA. Cat X-3658

BLOCKADE **\$17.95**
You'll need fast reflexes and good co-ordination for this one. It's written in machine language so it can give really high speed graphics. Try to force your opponent into a collision with a moving wall, without running into a wall yourself! Cat X-3659

PUNTER'S DREAM **\$12.50**
Place your bets, please the race is about to start! Study the form of the various horses before placing your bets. Then the race is on! The program looks after the betting accounts, of up to nine punters, and can even cream off a percentage for the 'house'! You get a realistic simulation of racetrack probabilities. Use it for fun—or to improve your strategies! Needs a 16K machine. Cat X-3660

BANDITO **\$14.95**
Like playing the one-arm bandits down at the club? Here's one you can play seated at your friendly System 80! Tell the machine how much you want to spend, and it will feed it through. Watch the handle go down, the reels spin, and your money go! Then experience that familiar thrill when you hit a jackpot. Needs a 16K machine. Cat X-3661

MATHS/SPELLING **\$9.95**
Here's a great way to coach spelling and maths: imagine how much more interesting the lessons are if the computer is giving the problems! Help stamp out illiteracy and poor spelling—this great program can help you do it! Cat X-3662

AIRMAIL PILOT **\$12.95**
You're back in the early days of aviation. You must get the mail through in the shortest possible time. Your cloth-covered bi-plane must take you through unpredictable winds and electrical storms—can you make it? Cat X-3663

INTERLUDE **\$22.50**
This is the adults-only game for your computer. After the kids have gone to sleep, let the computer give you ideas for the rest of the night! It comes with a comprehensive instruction manual! (Note: this program is NOT available to any person under 18 years of age). Do not purchase this program if you are easily offended. Needs a 16K machine. Cat X-3675

SIMUTEK 1 **\$17.95**
Not just one, but FIVE superb space fantasy games. Includes Graphic-Trek 2000 (try to dock the Enterprise with the space station without being shot down!), Invasion Worg (protect the Earth), Star Wars (get in to the Death Star, plant a Bomb and get out again!), Space Target (a battle game) and Saucers (an action graphics game). Complete with instruction book. Needs 16K. Cat X-3685

POKER PETE **\$15.95**
Like a game of poker? He's a pretty shrewd player—hard to beat, although it can be done. Has really intriguing graphics; needs 16K machine. Cat X-3684

NOW AVAILABLE SYSTEM 80 TECHNICAL MANUAL

48 pages of data, technical information, service data, minor modifications, etc. etc. Great for technically minded people with their own computer.

\$14⁹⁵

Cat. B-6210



DICK SMITH ELECTRONICS

SEE OUR OTHER ADVERTS IN THIS MAGAZINE FOR OUR STORE ADDRESSES AND RESELLERS



Matrox video boards reviewed

Craig Barratt

This article looks at two stackable S-100 video graphics boards, the ALT 256 and the ALT 512, both from Canadian manufacturers Matrox.

THE PRICE OF video display units is falling all the time and their high speed and flexibility are making them the most popular output device. But their vast potential cannot be properly realised without a fairly sophisticated board to drive them. At the high end of the video board market are a range of boards from a Canadian company, Matrox. Their Australian distributors are Measuring and Control Equipment Company, of Epping in New South Wales.

Matrox's range of boards may be broadly divided into two categories, alphanumeric and graphic displays. Both of these display types are available in a variety of bus structures, including S-100, Multibus (the SBC-80 bus from Intel), LSI-11 and a variety of stand alone modules.

The alphanumeric boards have display formats starting with eight lines by sixteen characters, right through to boards with 24 lines by 80 characters. Character fonts vary between 5 by 7 upper case only and 7 by 9 upper and lower case. One board has its characters sitting in a 12 by 14 matrix and is intended for a public information environment. Some boards have special features such as software programmed display formats, colour, character blanking, inverse video and variable intensity. All the boards are memory mapped, which means the microprocessor simply writes into certain memory locations to make characters appear on the screen.

The range of graphics boards is just as extensive. Display formats include 256 by 256 dots, 256 by 512, 512 by 512 and even a 256 by 1024! These boards are

I/O mapped and the features on some boards include colour, variable intensity and software programmed display formats.

Stacking boards

This seems all very well, but two problems become evident. Firstly these boards are obviously designed for the American market with a 60 Hz frame frequency and would seem unsuitable for use in Australia. This however is not a problem since Matrox have provided a series of jumper options which may be arranged to provide 50 Hz/312 line operation.

Secondly it would seem that a graphics board would need its own monitor, or you may need to switch either the alphanumeric or graphic video line through to your monitor. Matrox have overcome this problem by making their boards stackable. This means that a graphic and alphanumeric board may be combined to produce graphics and alphanumeric simultaneously on your monitor.

The only special requirement for stacking boards like this is that all boards derive their timing from one source, in other words one board must be a master and the others slaves. Most of the graphics boards and some of the alphanumeric boards have jumpers to select master/slave operation and these boards have 16 pin connectors with all the relevant signals.

Another more useful but not so obvious application for stacking boards is to have several graphics boards in a system and use each of the boards to provide grey level, colour, flashing or some other information particular to


each bit on the screen. Thus if you want a display with 256 by 256 bits, four grey levels, four colours, and a flashing bit for each dot on the screen you simply plug together five 256 by 256 by 1 Matrox graphics boards and add some of your own electronics, to give a 256 by 256 by 5 display. Now you know what to do when you win the pools!

The ALT-256

You wouldn't have guessed it, but the purpose of this article is to review an S100 graphics board from Matrox, the ALT-256. This board has only one bit per pixel (dot on the screen), in other words each of the 256 by 256 pixels may only be switched on or off. If you want colour or several grey levels you will have to stack two or more of these boards together as explained above.

The board occupies four output ports and one input port. The base address of these I/O ports is set to any multiple of four using wire jumpers on the board, and a functional breakdown of these I/O ports is provided on page 115.

As shown in figure 1 pixels are addressed with x and y coordinates. The x value for a pixel is the column number of that pixel, with the left column having x = 0, and the y value is the row number of that pixel, with the top row having y = 0. This means that the top left pixel has coordinates (0,0), and the bottom right pixel has coordinates (255,255). So to address a given pixel we simply write its x coordinate to port b+1, and its y coordinate to port b+2, where b is the base address of the I/O ports. Having set up the x and y registers of the graphics port we may now set

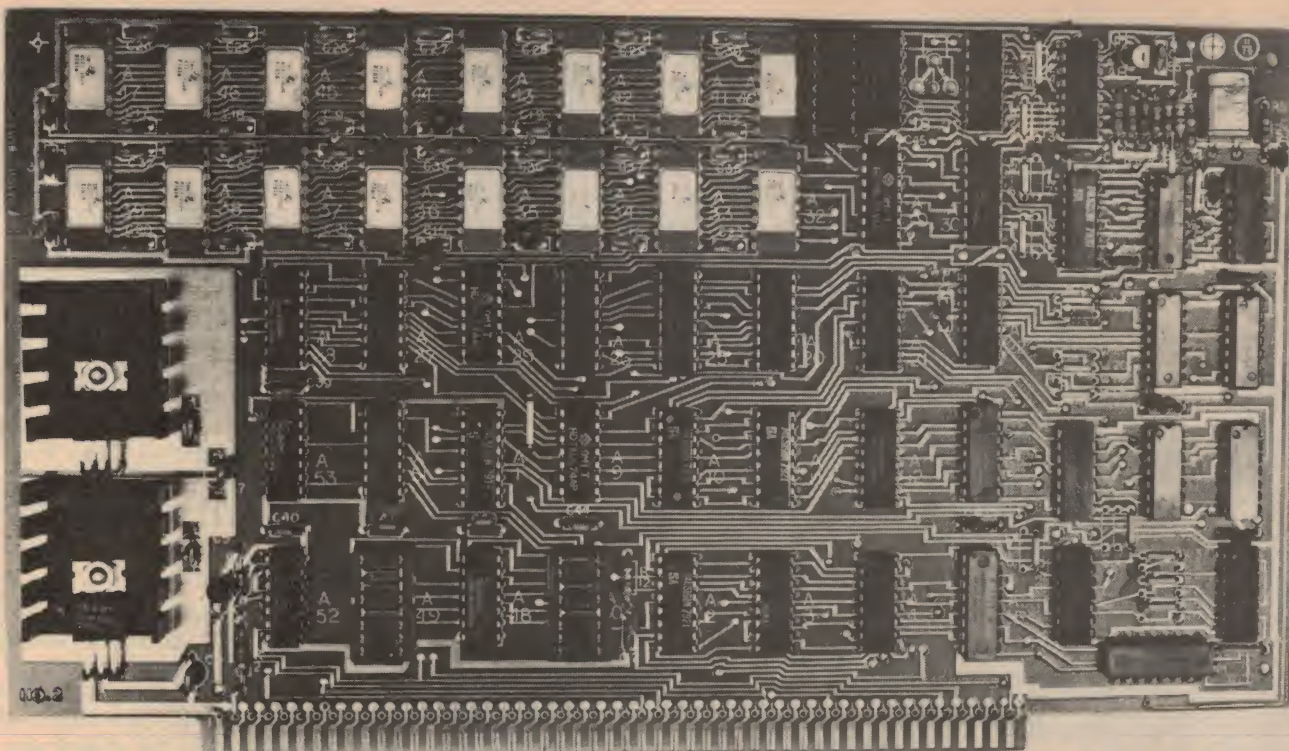

The ALT-256 video board provides a rock steady 256 x 256 pixel display with no flickers during screen accesses.

or reset that pixel. To reset that pixel we write a 0 to port b+0 and to set it we write a 1 to port b+0.

We may also erase the screen by writing to port b+3. Writing a 0 will clear all pixels and writing a 1 will set all pixels. Erasing the screen obviously isn't instantaneous, and in fact takes between 20 and 40 milliseconds (one and two frame times) and new commands issued during erase time will have undefined effects. To avoid this an input port has been provided with two status bits. The bottom bit (bit 0) is high if the display is busy (being erased) and low if the display is ready to accept commands. Bit 1 is low if the video portion of the screen is currently being scanned, and is high during vertical blank. Although setting and clearing

bits doesn't put flickers on the screen, this bit is useful for things like animation, where it wouldn't be desirable even for one TV frame to have half of a new image and half of an old image on the screen. The idea is that the processor should do all its screen manipulations during the vertical blank period.

Software interface

Obviously most programs that use graphics output will not use the graphics board at such a low level. Such an approach would be very clumsy, and all programs would have to be modified if a new and different graphics board was required for some reason. There are two good software solutions, one from an American company called Sublogic and another courtesy of myself.

Sublogic have written what they have called a Universal Graphics Interpreter. The idea is that programs produce a file of data for the interpreter, and the interpreter then looks at this data and draws the corresponding lines and pictures on the screen. This has the advantage that if your hardware changes, you only need a new interpreter while all your programs and data files need not change.

Interpreter commands include drawing lines, dots, polygons (shaded or unshaded), ellipses, moving the cursor or origin and setting various display modes. Things may be done single precision (8 bit) or double precision (16 bit) and the interpreter does its best to fit what you want done onto the display for which it was written. ▶



Figure 1. Pixels are addressed with x and y coordinates.

TABLE OF I/O PORTS


Write ports:

- b+0 Dot intensity
- b+1 X address
- b+2 Y address
- b+3 Erase


Read port:

- b+0 Status

b is the base address of these ports and is any multiple of 4.

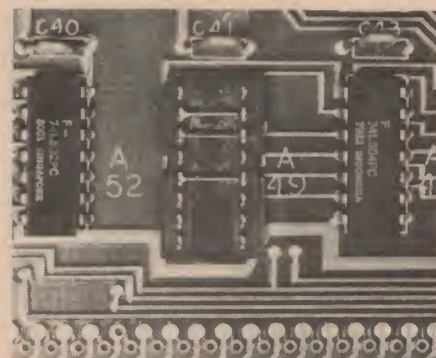

Jumpers convert the board from 60 Hz to 50 Hz operation.

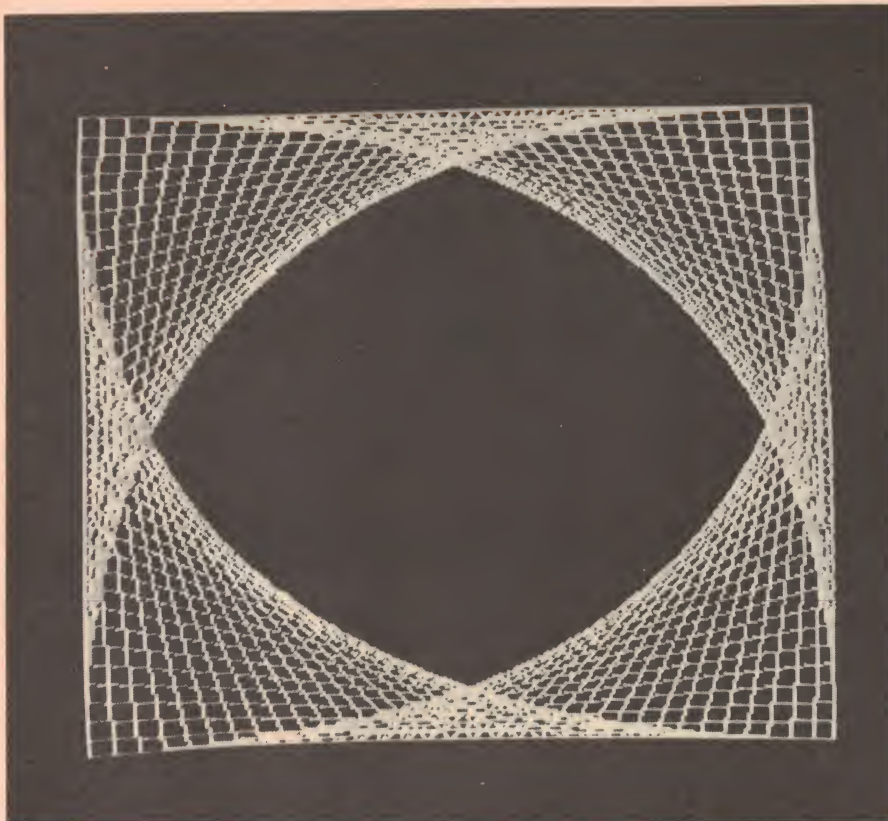

Writing the program to generate a pattern like this is very difficult if you use BASIC. It's relatively simple in PASCAL. A related pattern is shown on the facing page, together with the program used to generate it.

While this approach is a good one you would really need at least one disk drive and a good operating system to use the software package effectively.

Unfortunately the wrong Sublogic interpreter was given to us with the board, so we never got a chance to use it. Obviously we needed some method of drawing pictures for the photos you can see in this article.

All we wanted was three functions: clear the screen, set or reset a dot and draw a line between two points. These individual functions should really be written in assembly code for speed and should be linked into some higher level language. BASIC is not the obvious choice, and is about the worst choice we could make for this task. The juggling of variables required and the difficulty in interfacing assembly code subroutines (let alone passing parameters to them) ruled out BASIC. In fact a good language to choose is PASCAL and the above assembly code routines were quite easy to link in as procedure calls, with parameters passed in the usual fashion.

The PASCAL program that produced the triangle pattern is shown on page 117.

The hardware

Having covered the software aspects of the ALT-256, it would be a good idea to

look at its hardware, and our impressions of it.

On the plus side the boards are stackable, and may be selected for 50 or 60 Hz operations, as explained above. Besides these there are only two other nice aspects of the hardware that deserve mention. These are that there are no screen flickers during processor accesses, and the picture on the screen is rock stable.

In the category of "nasties" there are more than just trivial things, which isn't very satisfactory. The major shortcoming of the board we feel is that you cannot test a bit on the screen. In other words the board has write only memory (or WOM). This may not seem to be a problem if you are using Sublogic's interpreter but if you are writing interactive software, games or simply drawing pictures with a joystick you have to maintain a duplicate copy of the screen in system memory. This slows down screen accesses, because the duplicate copy has to be updated as well, and complicates programs quite unnecessarily. We cannot understand why such a feature on a supposedly very good board was omitted.

The second non-trivial shortcoming is that the position of the video data with respect to the vertical and horizontal

synch pulses is fixed, in other words you cannot move the picture up and down or left and right to centre it on your monitor screen. Although on our monitor the whole picture was visible, it certainly wasn't centred, and it is quite possible that with some monitors it would be necessary rather than just nice to be able to move the picture.

The only trivial hardware "nasty" of the board is that it is 145 mm high — even though Matrox's catalogue specifies that the ALT-256 is a 135 mm board. This is only a minor detail but if the accepted thing is to have 135 mm cards, why make one that is 145 mm high? Anyhow, just be careful if you want to plug this card into a close fitting card cage — you may not be able to get the lid on!

The ALT-512


This board is the big brother of the ALT-256, and is the only other S100 graphics board that Matrox makes. There are no prizes for guessing that its display format is 256 by 512 by 1, but that is only half true. The ALT-512 allows you to select under program control one of eight display modes, including 256 by 512 by 1, 256 by 256 by 2 (4 grey levels) and 256 by 256 by 1. In the last mode the processor may write into one 256 by 256 by 1 plane while the other plane is being displayed, which is ideal for applications in animation.

The price

Both the ALT-256 and ALT-512 are available from Measuring & Control Equipment Co Pty Ltd. Their postal address is P.O. Box 78, Epping, NSW 2121, and their phone number is (02) 86-4060. These two boards are available only in assembled and tested form, and come with a three month warranty. Now for the bit that hurts; the ALT-256 will cost you \$474 and the ALT-512 considerably more at \$695. Neither of these prices include sales tax, so you will have to add another 15% if you have to pay tax.

Matrox boards are obviously just the thing for the OEM market where people are after assembled hassle free modules and price is a more minor consideration. But as most hobbyists would think, \$474 is a lot for eight kilobytes of memory, especially when the board isn't quite as good as it should be.

Now I think you will be wondering "Is it worth it?". This really depends upon what your budget is and what you may need it for. If you are about to buy your second hard disk, you may want one of these to brighten up your computer room, but if you have to save up for each month's ETI, you needn't think about buying a Matrox board yet.

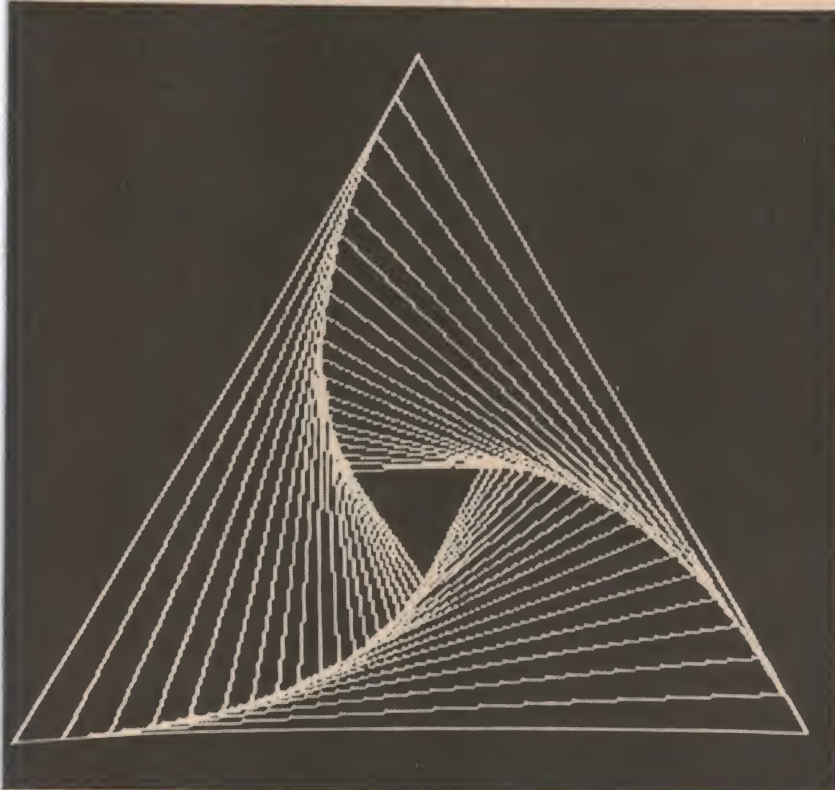

```

program triangle;
uses drawline;

const ratio = 0.06;
var new, old : array [1..6] of real;
    count, count1 : integer;

procedure newpt(var x1,y1 : real; x2,y2 : real);
var m, b : real;
begin
    line(round(x1),round(y1),round(x2),round(y2),1);
    if x1<>x2 then begin
        m := (y2 - y1)/(x2 - x1);
        b := y1 - m * x1;
        x1 := x1 + ratio * (x2 - x1);
        y1 := m * x1 + b
    end
    else y1 := y1 + ratio * (y2 - y1)
end;
begin
    clrscr;
    new[1]:=128;new[2]:=0;new[3]:=0;new[4]:=255;
    new[5]:=255;new[6]:=255;
    for count := 1 to 20 do begin
        for count1 := 1 to 6 do
            old[count1] := new[count1];
            newpt(new[1],new[2],old[3],old[4]);
            newpt(new[3],new[4],old[5],old[6]);
            newpt(new[5],new[6],old[1],old[2]);
        end
    end;
end.

```

Micro Computers From INDUSTRIAL MICRO SYSTEMS SERIES 8000: SYSTEMS WITH TIME PROVEN COMPONENTS

SERIES 8000

Regardless of the size of machine you choose, there's room inside for up to 256k of IMS RAM with memory management. And the integrated floppy disk capacity is pretty impressive too — more than a million bytes per drive! You can start with a single 8" drive, then install one or two more when you need it — all in the same cabinet. The Series 8000 System's power supply and disk controller are made with this kind of expansion in mind so growing is simple. And our Z-80 computers have features like serial parallel I/O's, clocks, PROMS on board so that less slots are used on the S-100 12 slot motherboard, giving more space for extra RAM or special purpose boards.

Because the system is S-100 and CP/M based you can run all of the programs written for use with CP/M systems. (Like CBASIC, FORTRAN, COBOL, PASCAL, C, ALGOL, WORDSTAR etc). And you can go multi-user as well!

CALL US FOR MORE INFORMATION ABOUT THIS SYSTEM OR IT'S LITTLE BROTHER WITH THE 5" DISKS — THE SERIES 5000.



S.I. MICROCOMPUTER PRODUCTS PTY LTD

Formerly Sigma International Pty. Ltd.

GPO BOX 72 SYDNEY 2001 92 PITT ST SYDNEY (02) 2314091 232 6804

Distributors: Mark Dewhirst, 428 St Kilda Road, Melbourne, VIC 3004. Tel (03) 26-5522.

Bruce Lipscombe Computer World, 98 Main Road, Moonah, Tas. 7009. Tel (002) 28-6288.

**The Rolls
Royce of
personal
computers**



**or the basis
for a
fine
business
system**

Yet the Sorcerer will still cost you less!

Looking for a really serious small computer? Feature for feature, dollar for dollar, the Sorcerer is way out in front. When you've finished playing with the others, move up to the Sorcerer.

FROM ONLY \$1340

Credit terms

available to approved applicants

Cat. X-3000 8k Memory \$1340	Cat. X-3001 16k Memory \$1395
---	--


P&P \$5.50 per unit

Features:

- Up to 48K RAM on board — with full S-100 expansion for a huge number of peripherals, etc.
- User-definable graphics and full upper & lower case character set as standard; also special character set.
- Plug-in ROM PACS™ give you instant changeover for special applications: Word processing, software development, etc. Or your own custom programs, using the EPROM PAC.
- Numeric keypad as well as full 63 key ASCII set.
- Centronics-type printer interface & RS-232C communications port built-in as STANDARD!

look at our prices for peripherals

Video Monitor




Suits Sorcerer, Tandy TRS-80, Apple etc.

Why waste money on overpriced monitors? This unit has large 30cm diag. screen plus it simply connects to your computer via an RCA socket. 240V AC or 12V DC operation.

\$149.50

X-1196
P&P \$5.50

S-100 Expansion Unit



Use other manufacturer's peripherals with your Sorcerer & S-100

For the serious computer owner. Contains powerful computer power supply plus buffer/interface circuit to protect the computer in case of damage to the S-100. Plus many more benefits.

\$575

X-3010
P&P \$5.50

Floppy disc drives




Need more storage? Floppies are the way to go. Quality Micropolis disk drives added on to your system can give up to 1260K bytes capacity!

Start with the Micropolis 1043 — it comes with the controller board to plug into your S-100 expansion unit. This gives you 315K.

If you want more capacity, use the Micropolis 1023 drive: it uses the 1043 controller board, so it's cheaper — much cheaper (\$600 to be precise!) You can add up to three 1023 drives, bringing your total capacity to over one and a quarter megabytes! Compare the cost of our 1.26M system with others — and be pleasantly surprised.

X-3205 \$1350.00 X-3208 \$750.00

Sorcerer ROMPACS™



Just plug them in — they instantly re-program the Sorcerer for specific uses. No problems!

WORD PROCESSOR PAC™

Want professional quality Word processing at a fraction of the cost of commercial systems? Your Sorcerer, Word Processor Pac™ and our daisy-wheel printer... and you're there!

Cat. X-3085 \$275.00

DEVELOPMENT PAC™

If you're serious about developing your own software, this is a MUST! It turns the Sorcerer into a powerful, dedicated development system for Z-80 assembly language programming.

Cat. X-3090 \$139.50

EPROM PAC™

The Sorcerer is ideal for dedicated uses: this PAC allows an EPROM to be used to control the computer. Ideal for all types of control systems, etc.

Cat. X-3095 \$75.00

DICK SMITH ELECTRONICS

SEE OUR OTHER ADVERTS IN THIS MAGAZINE FOR OUR STORE ADDRESSES AND RESELLERS



To Me
from Santa



BUILD A COMPUTER FOR XMAS FROM \$399

Discover the exciting world of microcomputers, profit from programming and applying these technological wonders. With the Applied Technology MICROMODULE family you can learn as you build these affordable, versatile and powerful kits. Based on the popular Z80 microprocessor and the industry standard S100 bus, MICROMODULES can be built up to any configuration from a simple 2 board system (INSTRUCTOR 80) to 64K systems with floppy disks, high speed printer suitable for process control, word processing and business systems.

INSTRUCTOR 80

The ideal starter system comprises DGZ80 kit with 1K RAM and DGOS ROM operating system; DG640 VDU kit, full function ASCII keyboard, 3 slot mother board and 2 x S100 sockets. Full assembly manuals are included, together with a simple programming course and sample programs to run. You add a simple power supply (8V) and a modified TV set and you have a complete computer system.

INSTRUCTOR 80 KIT

\$399.00.

SOFTWARE.

Microworld 12K Basic for Z80. If purchased with DGZ80. \$14.75.
Microworld Editor/Assembler. \$14.75.
Games Pack 1. (Target, Trek). \$14.75.
Utility Pack 1. \$14.75.
PCG Chess (If purchased with PCG). \$5.50.

NOTE. PRICES INCLUDE SALES TAX. Specifications and prices subject to change without notice.

MICROMODULE FAMILY.

HARDWARE.

DGZ80 CPU Kit with 1K RAM	\$199.25.
DG640 VDU Kit - 64 characters x 16 line format, upper/lower case and graphics	\$149.50.
TCT 16K EXPANDA RAM using static RAMS.	
- with 4K RAM.	\$139.50.
- with 8K RAM.	\$179.50.
- with 16K RAM.	\$259.00.
TCT PCG (ETI June 1980) adds fine graphics to DG640	\$140.00.
SCVT-100 (EA Oct. 1980) Serial Terminal.	\$189.50.
2650-S100 2650 on the S100 bus.	P. O. A.
JC100 9 slot mother board plated through holes and provision for power supply.	\$49.50.
JC200 Card Frame for JC100 mother board.	\$49.50.
JC300 S100 Power Supply 8V/8A, 15V/15V 2A with computer grade components.	\$67.50.
SECI Cassette Interface.	\$24.50.
EA/MODEM 300 BD Modem Kit (See EA September 1980)	\$69.50.
Clare C70 Keyboard.	\$165.00.



**APPLIED
TECHNOLOGY
PTY. LTD.**

MAIL ORDERS TO:

PO Box 311, Hornsby 2077
Please add \$2.00 per order
towards cost of post and packing.

OFFICE/SHOWROOM

1a Pattison Avenue, Waitara 2077
Hours: 9-5 Monday to Saturday
Telephone: 487 2711

AND NOW AT GOSFORD -

1 Debenham Road, West Gosford (behind the Pizza Hut)

bankcard
welcome here

Micros invade the communications world

Microprocessor technology has begun to change the style of radio communications equipment, making it lighter, more effective and easier to operate and service.

F.E. Phillips

THE INCREASING use of large scale integration and particularly the microprocessor has had a major influence on product design to the extent that modern radio communications equipment is becoming rather like the snack bar menu, 'chips with everything'. Almost no area of communications is escaping the relentless onslaught of the increasingly powerful microprocessor and other associated LSI products.

Chips are finding applications in control and display functions as well as providing memory and computing functions. In the near future we can expect that they will be used for improved fault location and diagnosis; circuit operations like frequency synthesis and automatic gain control; demodulating, decoding, handling and printing of data; and as the controlling link between synthesizers and preselectors.

An added benefit of the use of LSI is the general reduction in both size and weight over the modules that they replace. This is particularly apparent in the military field, where reduction in size and weight of manpack equipment, the simplification of controls, and the growing need to be able to handle data efficiently are the predominant issues.

Ease of operation

But the services have one problem that they share with industry. They too find it increasingly difficult to recruit and train personnel of consistently high calibre. Consequently, unless the new equipment can be operated and serviced effectively — the advantages in performance will be largely lost. This problem has been closely studied by communications equipment designers. The solution has been to incorporate microprocessors into communications



The Redifon R1006 receiver can control up to 99 remote receivers over any distance by ordinary telephone lines or radio links as appropriate.

equipment; thus the intelligent receiver has been developed. Such a receiver clearly opens up a number of interesting possibilities.

For example, if the receiver can be arranged to have its own channel information storage, the frequency, mode, bandwidth and other parameters for a particular operating state can be stored against a particular channel number. This enables the user to preprogram the channels he most frequently uses. Change of data can be effected quickly whenever required and without affecting the receiver's current operating status.

Having given the receiver storage for

channel information and mode of operation, it is a simple matter to instruct it to scan through a number of channels for traffic. To achieve this, the number of each channel to be scanned and the dwell time required can be fed into the receiver.

If the receiver has the software for a scan capability it is easy to program it to sweep between two frequencies. In this instance, the only information required is the upper and lower frequencies of the sweep, the sweep increment and the dwell time on each increment.

These examples show just a few of the possible functions which can be delegated to the receiver to reduce the load ►

on the operator simply by changing its software. Obviously many other automatic functions can be programmed in to suit given operational requirements.

For instance, Redifon has just arranged to fit R1000M marine receivers to three British Post Office cable ships. Programmed with the channel information for shore stations and linked to a telex machine, the receivers will scan pre-determined channels for traffic, enabling telex messages to be passed virtually automatically and without time delays. This will remove from the operator the need to listen through long traffic lists broadcast by the shore stations and then have to set up the necessary links.

It will be readily appreciated that an intelligent receiver can be used not only for local, but also for extended and remote control applications. The problems that hitherto faced the designer of computerised control systems for remote installations were principally tied up with the sheer volume of data involved. There was no feedback of information from the remote installation, which meant that the overall level of confidence in the system was low. Furthermore, it was not possible to separate the control facility by much more than 1km without prejudice to system reliability.

The high data rates involved meant that digital control over either telephone or radio links was not possible without interface problems. In fact, the use of high speed serial data of non-standard format would have involved the design of special interfaces for the control computer and also special equipment to test the complete system — clearly not a desirable situation in the light of current trends to achieve compatibility between civil and military networks.

Control simplicity

Again, the microprocessor has changed all this. These control limitations have been overcome in a positive way which has extended the system flexibility without increasing the complexity of the control system and without recourse to special interfaces.

Such a receiver for local or remote control applications could, for example, incorporate a microprocessor with 6K of ROM, a 1K RAM and two serial input/output ports. This overcomes the problems described previously because the volume of data that is sent to each receiver is greatly reduced by sending only those parameters which need to be changed. If it were desired to alter the bandwidth of a receiver then all that need be sent is a label, saying that the

REDIFON CETAC SYSTEM										14.02 GMT
PAGE 00	H.F.	SYSTEM	STATUS							0P, 2182
TX 1, CH 19, FR 4267 KHZ, MD A1, CD 1, MRX 2, AFI 1, WS SIM, I, READY										
TX 2, CH 14, FR 6469 KHZ, MD A2H, CD 1, MRX 14, AFI 1, WS SIM, I, READY										
TX 3, CH 04, FR 12790 KHZ, MD F1, CD 1, MRX 8, AFI 1, WS DUP, I, READY										
TX 4, CH 09, FR 17072 KHZ, MD A3H, CD 0, MRX 10, AFI 2, WS DUP, I, READY										
TX 5, CH 11, FR 12906 KHZ, MD A3J, CD 0, MRX 1, AFI 1, WS SIM, I, READY										
TX 6, CH 08, FR 25887 KHZ, MD A3, CD 1, MRX 11, AFI 2, WS SIM, I, READY										
RX 1, CH 03, FR 32906 KHZ, MD A3J, BW 8 KHZ, AGC L6, BF V10, R6 V10, MT 5										
RX 2, CH 08, FR 4267 KHZ, MD A1, BW 2 KHZ, AGC DF, BF V 5, R6 V 7, MT 1										
RX 3, CH 12, FR 6578 KHZ, MD A2, BW 6 KHZ, AGC SH, BF V 4, R6 V10, MT 1										
RX 4, CH 23, FR 11345 KHZ, MD A3, BW 1 KHZ, AGC L6, BF F, R6 V10, MT 1										
RX 5, CH 13, FR 1412 KHZ, MD F1, BW 3 KHZ, AGC L6, BF F, R6 V10, MT 3										
RX 6, CH 24, FR 500 KHZ, MD A2J, BW 8 KHZ, AGC SH, BF F, R6 V 5, MT 1										
RX 7, CH 09, FR 22349 KHZ, MD A3H, BW 6 KHZ, AGC L6, BF F, R6 V10, MT 4										
RX 8, CH 18, FR 14287 KHZ, MD A3H, BW 3 KHZ, AGC SH, BF F, R6 V 6, MT 1										
RX 9, CH 12, FR 3561 KHZ, MD A3J, BW 1 KHZ, AGC DF, BF V 3, R6 V10, MT 1										
RX10, CH 25, FR 4256 KHZ, MD A3B, BW 6 KHZ, AGC L6, BF V 3, R6 V 2, MT 1										
RX11, CH 01, FR 25887 KHZ, MD A3J, BW 8 KHZ, AGC L6, BF V 1, R6 V10, MT 6										
RX12, CH 5, FR 12788 KHZ, MD A2, BW 3 KHZ, AGC SH, BF F, R6 V10, MT 1										
RX13, CH 5, FR 16974 KHZ, MD A1, BW 3 KHZ, AGC SH, BF F, R6 V 9, MT 1										
RX14, CH 17, FR 6469 KHZ, MD A2H, BW 3 KHZ, AGC L6, BF V 7, R6 V10, MT 2										
TXEM, CH 09, FR 2182 KHZ, MD A3, BW 8 KHZ, AGC SH, BF F, R6 V10, MTEM										
TXEM, CH 09, FR 2182 KHZ, MD A3, CD 1, MRX EM, AFI 2, WS SIM, I, READY										

A typical CETAC page readout immediately identifies current operational status which can be pre-programmed and amended by simple keyboard operations.

data is bandwidth data, and then provide the new bandwidth instructions. By this means, the data rate can be kept down to 600 baud yet still retain an adequately fast response time under manual control. This latter requirement is important as it gives the operator the same 'feel' as is achieved with local control.

Secondly, once the microprocessor in the receiver has received the data, it then retransmits it back down the line. So a reverte data capability now exists, which allows for built-in self-checking and enhances operational confidence.

Thirdly, such a system can be designed to use asynchronous ASCII characters for its data format. The big advantage of this is that any device which can produce ASCII characters can now control the receivers. Therefore, control can be derived from any standard serial input/output board, whether this be a computer, VDU, teletype or any other similar device. This really is what distributed processing is all about!

Furthermore, the data format can be designed so that error correcting modems can be used in the transmission path, thus enabling control to be achieved over less than perfect paths. Full control is therefore possible over virtually any distance by line or data link. The need for special interfaces is eliminated and consequently, it becomes much simpler to test the complete system. Of course, as the volume and rate of data are low the receiver can be used for remote control applications over ordinary telephone lines, as well as for local systems.

A particular application would be in the area of frequency synthesis, where the basic synthesiser can now be made by LSI technology, but where a large number of discrete peripheral ICs are still required for interface with control display and other interdependent functions. The microprocessor can sweep some of these ICs out of the way.

Digital AGC

A persistent problem in HF receivers has been the AGC. Here the microprocessor can easily out perform analogue systems.

Microprocessors can also be used for a host of other applications such as diversity analysis and diversity combining. Methods can be used which are quite unlike currently available analogue combiners and a reduction in error rates by a factor of ten is possible.

There is yet another complete area where the microprocessor will be used. This is in the demodulation, decoding, handling and printing of data. Whilst this may not actually be done in the receiver itself, it may be carried out by a very compact unit.

All the above applications really come under one heading — signal processing. The sheer complexity of functions per chip have now made digital filtering a reality. In the past, the accuracy of analogue filtering was determined by the quality of the component parts used. Now the only really critical component is the crystal reference and the practical limitations to accuracy are the number of bits per word and the processing speed.

Last but not least, a microprocessor

can test its own systems and diagnose any fault in them. A particularly important tool for achieving self-test is signature analysis. The elegance of a system based on signature analysis is that the signature print can be stored in the processor memory itself, thus simplifying test procedures.

In the longer term microprocessors may well take over most of the signal processing of an HF receiver. Most of the data or information that is handled by such a receiver is at a relatively low information rate and, therefore, if the information can be processed at the actual information rate as opposed to the RF frequency, it is quite possible that microprocessors could do a large proportion of the signal processing. This is likely to lead to a receiver comprising an RF filter and first mixer followed by a microprocessor which would perform the remaining functions. Such a receiver would have no filters, no crystals — except for a very accurate clock — and very little analogue circuitry.

The real bonus however, arises from the nature of digital processing. So far the tendency has been to think more in terms of the accuracy and reliability of digital versus analogue systems. The advantage of translating communications intelligence into a digital format is that it can easily be stored and pro-

cessed according to need, i.e. signal processing need no longer mean adhering to a fixed format for processing but can be designed for adaptive processing.

Systems applications

Having discussed the application of microprocessors to equipment, it is worth looking at their applications in the management of complete communication systems. With the complexity of modern communications, experience has shown that at times of high activity or stress operational errors can and will arise. The incorrect selection of frequency, channel, mode or even equipment could, in a military context, result in catastrophic loss of communications. In addition faults or breakdowns in hardware require valuable time to locate and repair. However, these problems can be overcome by centrally controlling the system with a minicomputer and its associated equipment to exercise control over distributed processing built into the system.

One such system is the Redifon CETAC. Originally designed for the management of fighting ships communications, it is equally applicable to land-based civil and military communications. The heart of the

system is a central control unit employing a mini-computer with VDU and keyboard. This controls a range of standard, digitally-controllable communications equipment (HF/VHF/UHF), transferring the control data along data highways using conventional multiplexing techniques. These data highways carry the command and tuning data to the transmitters, receivers and ancillary units.

The system memory allows for the programming of several separate action states. This gives the operator the facility to recall on the VDU at a single keystroke the operational modes of all equipment needed in any particular action state for status verification.

New generations of equipment will probably feature a greater degree of module commonality so that modules fulfilling roughly similar functions in different equipment will tend to become standardised in the same way that the motor industry has adopted a common approach to such things as door handles, alternators and ignition systems. ●

This article has been reprinted from the March 1980 issue of Communications International. Communications International is published at 40/50 Hatton Garden, London EC1N 8XS, England by Northwood Publications Limited, trade and technical publishing division of the Thomson Organisation Ltd. We are indebted to Vicom International for supplying us with the article and photographs.

MASTER CHECK

VOLTAGE ANALYSER

Voltage indicated:
6, 12, 24, 50, 110,
240, 415 V \approx



MASTER CHECK

- Cannot be over ranged.
- Indicates AC or DC Voltage.
- Automatic Voltage indication.
- Read off polarity at a glance.
- Designed for Australian conditions.
- 7 Voltage indication steps by L.E.D.'s
- Robust lightweight plastic construction.
- AC or DC Voltage Check from 6 to 415 Volts.
- Useable on battery operated devices to three phase AC.
- Available from Electrical Wholesalers throughout Australia.

ALSO AVAILABLE Multi-Check — Handy solid state continuity checker. Will check AC or DC Voltages from 4.5 to 415 Volts.

BELL


BELL INSTRUMENTS PTY. LIMITED

Garema Circuit, Kingsgrove 2208 NSW, PO Box 154. Tel (02) 750-6000. 74 Raglan Street, Preston 3072 Vic. Tel (03) 44-5021. 5/59 Jewell Street, East Perth 6000 WA. Tel (09) 325-9732.

INTRODUCING AUSTRALIA'S BEST VALUE IN RAM

THE GODBOUT ECONORAM XX

IEEE S100 STATIC RAM CARD

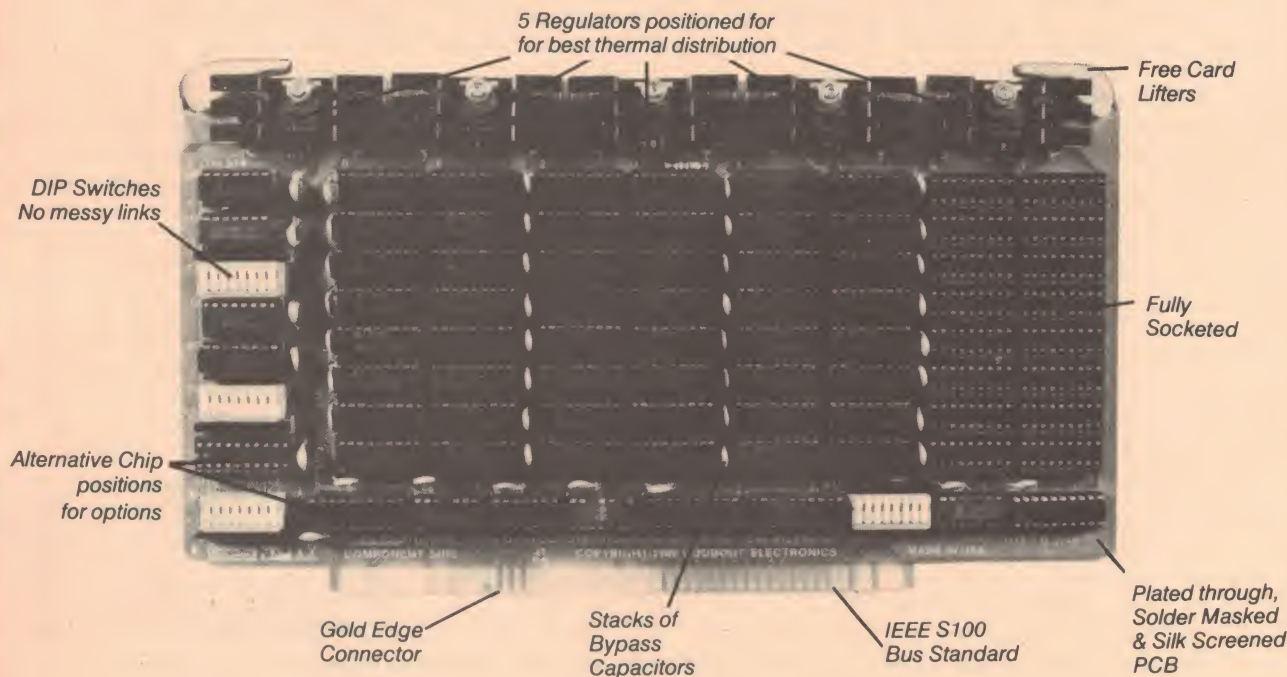

- 16, 24 or 32K 4 MHz STATIC RAM TO IEEE S100
- BANK SELECT/24 BIT ADDRESSING AND PHANTOM
- STATIC RELIABILITY AT NEAR DYNAMIC PRICES

Populated to 16K — Unkit \$335.....	\$319*	Assembled \$419.....	\$399*
Populated to 24K — Unkit \$450.50.....	\$429*	Assembled \$587.50	\$539*
Populated 32K — Unkit \$587.....	\$559*	Assembled \$734.....	\$699*

*SPECIAL INTRODUCTORY PRICES FOR DECEMBER


Plus sales tax if applicable.

Definition: "Unkit" — name applied by Godbout Electronics to products that are not fully assembled, but do have all IC sockets, dip switches, bypass caps and most other discrete components pre-installed and precision flow soldered.
Use 2 cards for 48, 52, 56, 60 or 64K system with page selectivity for further expansion.

SPECIAL OF THE MONTH — 1 only micromation double density disk controller for 8" or 5¼" drives. Including CP/M — it's a steal at**\$350**

Trading hours Monday to Saturday 9am — 6pm.

- See us for details on the incredible VB3 80 x 24 video cards — a display card that will make you forget all about serial terminals.
- We are the S100 specialists — cards and complete systems.

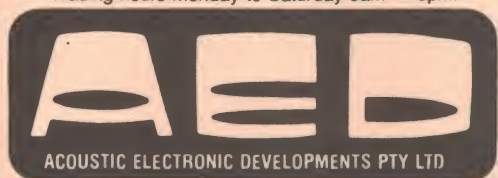

MICROCOMPUTER PRODUCTS

130 Military Road, Guildford,
NSW 2161. Phone (02) 632-6301,
(02) 632-4966. Telex AA25958.

archives

*the price breakthrough in
performance business computers.*

Success in today's business world demands efficiency and financial accuracy. But the ever-increasing cost and complexities of doing business are forcing you to find new ways to cut labour cost as well as gain tighter control over your business.

The ARCHIVES BUSINESS COMPUTER can give you the control you need to be successful, all in one economical desk-top cabinet.

The ARCHIVES BUSINESS COMPUTER can do your daily business functions such as accounts receivables and payables, general ledger and inventory control. It can keep track of stock on hand, stock on order, and supplies to be ordered. As a Word Processor the ARCHIVES BUSINESS COMPUTER can do your correspondence, text editing of manuals, contracts and proposals. The ARCHIVES BUSINESS COMPUTER can do virtually any information handling or record keeping operation you are presently doing plus many desirable operations that cannot economically be performed by manual methods.

The Archives disk storage can reduce entire filing cabinets to convenient 5 1/4 inch disks and instantly retrieve any information that you may need when you need it.

Sound incredible? The ARCHIVES BUSINESS COMPUTER is that and more!

It's a business assistant. One that never forgets, never loses reports, makes efficient use of its time and is completely trustworthy.

The ARCHIVES BUSINESS COMPUTER is also easy to work with. So easy in fact, it's no more difficult to operate than any other office machine. While the ARCHIVES BUSINESS COMPUTER is handling the extra work load, you can have more time to develop new business in the field.

There is no question that the major area restricting your business growth is in the office. This is one place where employee efficiency is still in the dark ages - requiring the handling of paper, forms and files. What you really need is not the physical presence of obsolete forms and letters, but the information and data they contain. You need the Archives Business Computer.

The Archives Business Computer offers you an economical way to individualised computing power. You can take it anywhere there's work to be done. Plug it in, turn it on, and it's working for you giving you instant access to the information you need.

Designed especially for a small business or single department in a large company, the Archives Business Computer is a system you can understand and use with a high degree of efficiency without being a computer specialist.

Incorporating quality and reliability the Archives Business Computer provides you with today's and tomorrow's best value in a computer system. The Archives Business Computer is a system to help your business grow.

The Archives Business Computer is backed by competent and qualified technical support for both equipment maintenance and software aid as well as continuing personalised service.

One of the best investments you can make in this inflationary economy is the Archives Business Computer. In fact, virtually every business enterprise can benefit in some practical way from business computing.

A full scale demonstration of the Archives Business Computer will help you draw positive conclusions about how your business can improve its cash flow, reduce costs and risks, improve customer service, increase sales, and improve your employee productivity.

It's time to make a move for the future.
It's time to contact Computerland
Melbourne your Archives dealer.

FEATURES

Z80 4MHz Processor
64 K RAM Standard
744K Bytes Storage (Standard)
1 1/2 Megabytes Storage (Optional)
12" Green Phosphor Monitor
25 Lines x 80 Display
CP/M Operating System
Selectric Style Keyboard
S100 Expansion Inbuilt
Microprocessor Keyboard
240 x 100 Graphics Format
Numeric Keypad and Function Keys.



SOFTWARE

Microsoft Fortran
Microsoft Basic
Microsoft Cobol
General Ledger
Stock Control
Mail List
CBasic 2
Accounts Payable
Accounts Receivable
Property Management
Word Processing System
Microsoft Basic Compiler

ComputerLand[®] in Melbourne

555 Collins St. • Melbourne, Vic. • Australia 3000 Phone 62 5581 • 62 6737 • Telex AA37007





Six metres "buried"

— but it ain't dead and gone !

Two days after multicultural ("ethnic") TV went to air on channel 0 at the end of October, a group of Sydney amateurs "buried" the six metre band.

The mock funeral was held on 26 October outside the Gore Hill studios of ABC TV as a protest against the use, "temporary as it might be", of channel 0.

A group of some 15 people carried a coffin from the ABC studios to Gore Park where they buried their beloved six metre rigs. Quite a bit of media coverage was obtained, news teams from channels 2, 7 and 10 attended as well as several radio stations and newspaper reporters.

The Sydney Morning Herald carried a small piece on the event the following day.

A "Sydney Channel 0 Action Group" was formed subsequently with the aim of (1) educating the public about the interference-prone channel 0 and its alternative, channel 28; and (2) promoting the utilisation of the amateur six metre band as a portable/mobile/handheld band. The group feels that aim (2) is imperative to sus-

tain interest in the band.

Frankly, we disagree. Any TV that arises from operating on six metres is the fault of (a) the TV set, (b) antenna deficiencies or (c) antenna/feedline problems — that is, apart from straight front-end overload. In any event, the onus is on the TV set owner to have the problem rectified, not the amateur.

Your scribe once lived in a valley in one of Melbourne's eastern suburbs — and operated AM on six metres (those were the days . . .) following the introduction of channel 0 there. The RI had in excess of 120 TVI reports to 'cure'. He made the points I just made. If you operate six metres, as I do, and intend to 'pack up and go on some other band', as I don't, then you should re-think your position carefully.

They may have "buried" six metres, but "the awakening" is yet to come!

Roger Harrison VK2ZTB

VK2DTE on the air !

A new callsign — so what ? This one's different — it belongs to the Modern Magazines Electronics and Communications Club !

That's us folks!

There being five hams more or less on staff — Roger VK2ZTB, Phil VK2DKN, David VK2YMI, Jonathan VK2YBN, Simon VK2YAZ plus a number of correspondents and close associates with callsigns, we thought it a good idea one night,

over a few synergistic beers, to form a club and apply for a club call.

VK2DTE is the result. So, if you recognise the callsign on the air, you're welcome to break in and say hi!, or whatever takes your fancy (and complies with the regulations!).



Requiem for six metres, Gore Hill, Sydney (pix: Sam Voron VK2BVS)

National VHF Field Day

For many years there has been much discussion about a nationally-coordinated VHF field day.

Many VHF field days have been held over the years, but they have generally suffered from being only state-wide affairs.

The Geelong Amateur Radio Club from Victoria has decided to accept the challenge to co-ordinate a national VHF field day weekend.

It was decided to hold the contest when interest is highest — during the annual Ross Hull contest period — hopefully giving added impetus to the event. The Ross Hull rules and scoring have been adopted for the National VHF Field Day to keep the two contests compatible for

scoring and log-keeping purposes.

The contest period is any 24 hours within the first 48 hours of the Ross Hull contest. Only entries from portable stations will be accepted. A station is deemed portable when more than 2 km from his home QTH. No equipment may be set up more than 24 hours prior to the start of the contest. Power may be derived from any source available. A scoring contact may be made with the same station on the same band repeatedly provided at least four hours elapse between successive contacts. Each entry must include a front sheet giving details of station, location and score claimed.

All entries will be acknowledged and certificates will be awarded to the overall winner plus the highest scorer in each call area. All entries to "Contest Manager", Geelong Amateur Radio Club, P.O. Box 520 Geelong 3220 Vic.

The Gosford Convention

Yes folks, it's on again. The 24th annual field day (convention, really) of the Central Coast Amateur Radio Club will be held on Sunday 22 February 1981.

All the familiar goodies and events are planned: scrambles, foxhunts, disposals, trade displays, outings etc. Read all about it in next year's first issue!

BOOKS

Just some of the books from the biggest range of radio and electronics books in Australia. If the book you require is not listed below, it can be ordered from us.

NEW - NEW - NEW Latest editions of some of the most popular books on the subject:

The Master IC Cookbook (Clayton L. Hallmark)	\$12.50
IC Array Cookbook (Walter C. Jung)	\$10.00
Amateur Operator's Handbook (Revised Dec. 78)	
(Postal & Telecommunication Dept.)	\$3.60
ARRL Handbook 1980	\$14.95
R.S.G.B. Handbook — Volume 1	\$21.95
R.S.G.B. Handbook — Volume 2	\$18.90
Radio Handbook — 21st Edition (New edition) (William Orr)	\$27.75

ADAM OSBORNE BOOKS:

An Introduction to Microcomputers — Volume 0 — The Beginner's Book	\$13.50
An Introduction to Microcomputers — Volume 1 — Basic Concepts	\$19.20
An Introduction to Microcomputers — Volume 2 — Some Real Microprocessors	\$29.00
An Introduction to Microcomputers — Volume 3 — Some Real Support Devices	\$21.20
Some Common Basic Programs	\$16.20
Accounts Payable and Accounts Receivable	\$23.00
Payroll with Cost Accounting in Basic	\$23.00
Z80 Assembly Language Programming	\$19.20
Z80 Programming for Logic Design	\$13.50
8080A/8085 Assembly Language Programming	\$16.20
6800 Programming for Logic Design	\$15.50
6800 Assembly Language Programming	\$19.20
8080 Programming for Logic Design	\$13.50
6502 Assembly Language Programming	\$19.20
Z8000 Assembly Language Programming	\$19.20
The 8086 Book includes the 8088	\$22.50

AMERICAN RADIO RELAY LEAGUE PUBLICATIONS:

All New A.R.R.L. Code Kit	\$14.50
Hints and Kinks for the Radio Amateur	\$7.20
The Radio Amateur's VHF Manual	\$7.20
Understanding Amateur Radio	\$8.80
The Radio Amateur's License Manual	\$7.20
A Course in Radio Fundamentals	\$7.20
Specialized Communications Techniques for the Radio Amateur	\$7.20
FM & Repeaters for the Radio Amateur	\$8.80
Single Sideband for the Radio Amateur	\$7.20
Ham Radio Operating Guide	\$7.20
Electronics Data Book	\$7.20
Solid State Design Design for the Radio Amateur	\$12.80

MICROCOMPUTERS/MICROPROCESSORS BOOKS:

Stimulating Simulations — 2nd Edition (Engel)	\$6.00
NCR EDP Concepts Course (NCR Corporation)	\$19.95
Computer Graphics Primer (Mitchell Waite)	\$17.50
The Complete Microcomputer Systems Handbook (Edward L. Safford, Jr.)	\$12.50
TRS-80 Interfacing — Book 1 (Jonathan A. Titus)	\$11.95
Z80 and 8080 Assembly Language Programming (Kathe Spracklen)	\$10.00
Australian Microcomputer Handbook (Prepared by Computer Reference Guide)	\$20.00
TRS80 Disk and Other Mysteries (H.C. Pennington)	\$19.80
Computer Programming for the Complete Idiot (Donald McCunn)	\$9.95
Z80 Microprocessor Programming and Interfacing	
Book 1 (Nichols/Nichols/Rony)	\$14.75
Z80 Microprocessor Programming and Interfacing	
Book 2 (Nichols/Nichols/Rony)	\$17.50
Best of Interface Age: Volume 1 — Software in Basic (Ed. Carl D. Warren)	\$17.80
Best of Interface Age: Volume 2 — General Purpose Software (Ed. Interface Age)	\$12.70
6502 Software Gourmet Guide & Cookbook (Scelbi)	\$16.80
How to Build Your Own Working Robot Pet (DaCosta)	\$8.50
Microcomputer Primer (Waite & Pardee)	\$10.75
Microcomputers for Business Applications (Barden)	\$11.95

OTHER TITLES:

Solid State Power Electronics (Irving M. Gottlieb)	\$13.50
So You Want to be a Ham (Robert Hertzberg)	\$8.95
Practical Low-cost IC Projects (Herbert Friedman)	\$6.25
Introduction to Biomedical Electronics (Edward J. Bukstein)	\$8.75
Design of Active Filters, with Experiments (Howard M. Berlin)	\$10.75
Video User's Handbook (Peter Utz)	\$17.50
Music and the Synthesiser (Bruce Graham)	\$15.00
The S-100 and other Micro Buses (Elmer C. Poe & James C. Goodwin)	\$7.95
TV Antennas and Signal Distribution Systems (M.J. Salvati)	\$13.50
Building Hi-Fi Speaker Systems (Philips)	\$10.75
Master Handbook of 1001 Practical Electronic Circuits (Ed. Kendal Webster Sessions)	\$15.95
Getting Acquainted with the IC (Rufus P. Turner)	\$6.75
Practical Antennas for the Radio Amateur (Scelbi)	\$15.40
IC OP-AMP Cookbook (Walter Jung)	\$17.50
TTL Cookbook (Lancaster)	\$12.95
TV Typewriter Cookbook (Lancaster)	\$13.50
CMOS Cookbook (Lancaster) 1st Edition 1977	\$14.25
Active Filter Cookbook (Lancaster)	\$19.95
IC Timer Cookbook (Jung)	\$13.50
The Cheap Video Cookbook (Lancaster)	\$7.95
Electronics Pocket Book — 3rd Edition (P.J. McGoldrick)	\$10.50

For mail orders please add: \$1.40 Local \$1.75 Interstate

McGILL'S AUTHORISED NEWSAGENCY PTY. LTD.

187 Elizabeth Street, Melbourne. Phone: 60-1475-6-7

Prices Subject to Alteration

AUSTRALIA'S ONLY ONE STOP RADIO COMMUNICATIONS AND SWL CENTRE

INTRODUCES

THE NEW NO COMPROMISE JRC NRD-515

For further information write, phone or call in. Colour brochure and specifications available.



Communications Receiver.

- Versatile high quality.
- Covers 100KHz to 30MHz using PLL and photo type rotary encoder to determine frequency setting.
- Continuous coverage. Optional 24 channel memory unit. Effective passband tuning and electronic switching.

- All solid state chassis — completely modular construction. All components mounted on plug-in circuit boards for easy servicing.
- Excellence and quality for professional and commercial services, sophisticated SWL and ham users.

NEW YAESU FRG-7700

Features:

- 150KHz — 30MHz.
- CW, SSB, AM, FM.
- Three AM selectivity positions.
- 12 channel memory.
- Noise blanker.
- Digital clock and timer.
- And many other features.



KENWOOD R-1000 Communications Receiver

Analog dial, digital clock, automatic timer, three selectivity positions and many other features.



INFO-TECH M-200F

RTTY, CW, ASCII, VIDEO CONVERTER




This fantastic machine, together with a good communications receiver and your own TV set or CCTV monitor, provides the most sophisticated SWL SYSTEM, that until recently could only be dreamt about. M-200F will reveal the secrets of RTTY, CW and ASCII transmissions from all over the world. Listen to embassy, commercial, military, world news service and amateur transmissions.

We also stock Australia's largest selection of scanning receivers. You can listen to aircraft, marine, police and other transmissions.

BEARCAT 210, BEARCAT 220, BEARCAT 250, BEARCAT POCKET SCANNERS and SX-200.

SWL ACCESSORIES: antenna tuners, indoor/outdoor active antennas, active audio filters, preselectors, headphones. Best selection of best brands of ham radio transceivers.

WRITE OR CALL FOR FURTHER SPECS.

 **emtronics**

CITY & SHOWROOM: 649 George St. Sydney, NSW. (02) 211-0531. POSTAL: PO Box K21, Haymarket, NSW 2000. Cable: Emtron Sydney.

PREDICTIONS

JANUARY 1981

These GRAFEX style computer generated predictions are provided courtesy of the Australian Ionospheric Prediction Service, Dept. of Science & the Environment.

KEY TO SYMBOLS

- A blank area means no normal prediction is possible.
- . . . path open less than 50% of days in month.
- % . . . path open 50-90% of days in month.
- F . . . path open at least 90% of days in month.
- X . . . complex mixture of modes. Expect abnormal propagation.
- M . . . propagation possible by both 1st and 2nd F-layer modes. Expect strong fading.
- S . . . propagation possible by 2nd mode (also 3rd and mixed E and F modes). Expect strong fading, weak signals.
- A . . . High absorption indicated. Expect weak signals.

Covering 3 MHz to 40 or 60 MHz, these predictions show the times radio contact is possible between the areas designated beneath each graph, as well as the possible 'mode' and reliability. Vertical columns indicate time — commencing at 0000 UT on the left, to 2300 UT at right. For reliable predictions follow the times and frequencies indicated by the F character.

Complete information on using these predictions can be obtained by sending a stamped, self-addressed envelope to:-

ETI — Predictions
3rd floor 15 Boundary St
RUSCUTTERS BAY NSW 2011.



<p>60.0 58.0 56.0 54.0 52.0 50.0 48.0 46.0 44.0 42.0 40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to Japan (Also serves N.E. and S.C.)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to South Pacific</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to North America (Also serves N.E. and S.C.)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to South America (Also serves S.C.)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to North Africa (Also serves S.C.)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to South Africa (Also serves S.C.)</p>
<p>60.0 58.0 56.0 54.0 52.0 50.0 48.0 46.0 44.0 42.0 40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast to Europe (Short Path)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>E.C. and S.C. to Europe (Long Path)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>East Coast and S.C. to Persia</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>North East to South Pacific (Also serves S.E.)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>North East to North Africa</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>North East to South Africa</p>
<p>60.0 58.0 56.0 54.0 52.0 50.0 48.0 46.0 44.0 42.0 40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>North East to Europe (Short Path)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>S. Central & W.C. to Europe (Short Path)</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>West Coast to North America</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>West Coast to Japan</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>West Coast to North Africa</p>	<p>40.0 38.0 36.0 34.0 32.0 30.0 28.0 26.0 24.0 22.0 20.0 18.0 16.0 14.0 12.0 10.0 8.0 6.0 4.0 2.0</p> <p>West Coast to South Africa</p>

THE RECEIVER

NEW YAESU FRG 7700

**MORE FEATURES THAN
THE 7000 —**

and it's CHEAPER!!



Cat. D-2840

First the incredibly popular FRG-7. Then the FRG-7000. Now a brilliant new all mode, general coverage receiver with all the features the keen amateur or short wave listener really needs. Digital Display — reading from 150kHz to 30MHz! This also doubles as a highly accurate crystal controlled clock. Wide dynamic range. Selectable AGC. All mode (including FM and 3 widths of AM). Optional twelve memory channels with backup. A remarkable piece of solid state engineering — and it is actually cheaper than the FRG-7000 (and many other 'similar' receivers on the market). Ask to see one soon at your nearest Dick Smith store or re-seller. Magnificent!

**WIN A TRIP TO
HONG KONG CONTEST
BUY NOW AND ENTER!**

Freight \$6
Below cost anywhere in Aust.

\$525

OR FROM \$55 DEPOSIT AND
\$25.74/MONTH (24 MONTHS)

Memory Unit extra




\$543⁰⁰

OR FROM \$63 DEPOSIT
AND \$26.28/MONTH
(24 MONTHS)

NEW FT480

- All mode 2 metre SSB/CW/FM!
- Microprocessor controlled
- Digital display!
- 30 watts PEP

This is the one they're all talking about: the fabulous new 2 metre all-mode transceiver from Yaesu. Offering outstanding performance and ease of controls, it must be the transceiver of the eighties! Cat D-2887

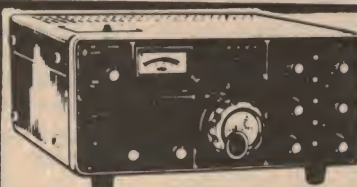

SAVE ON FT625!


ALL MODE 6M

**WAS \$795.00 ..
NOW ONLY**

\$695⁰⁰

OR FROM \$75 DEPOSIT AND
\$20.48/MONTH (48 MONTHS)

We've knocked an incredible \$100 off the price of these popular all-mode 6 metre rigs. There's still plenty of good DX out there on 6 — and the FT-625 is just the transceiver to get it! Cat D-2886

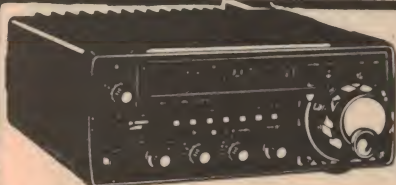

\$765⁰⁰

OR FROM \$85 DEPOSIT AND
\$22.86/MONTH (48 MONTHS)

NEW FT707

- All HF bands!
- AM/SSB/CW!
- Tiny Size!
- True digital display
- New WARC bands!

They've been pretty hard to get: and small wonder! The superb FT-707 packs a huge punch from its tiny size: 240W DC! It's the ideal rig for mobile, base or portable work. Cat D-2869



SUPERB FT-207

- Microprocessor controlled hand held giving full 144-148 band!
- Digital display.

\$358⁰⁰

Cat D-2888
OR FROM \$38 DEPOSIT AND
\$17.52/MONTH (24 MONTHS)

For today's active ham, this is the set to take with you. Takes up virtually no room, but really gets out! Make contacts wherever you go with the FT-207R.

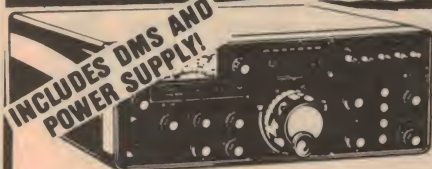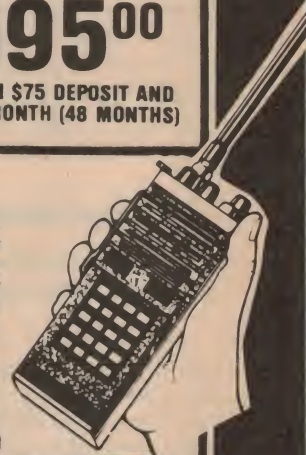

\$1278⁰⁰

OR FROM \$138 DEPOSIT AND
\$38.32/MONTH (48 MONTHS)

NEW FT107M

- The ultimate!
- WARC bands
- All solid state
- Variable IF bandwidth!
- Speech proc.

It must be every amateur's dream to own one of these! You can: and take full control of the bands. Whatever you want from your transceiver, the FT-107 offers it! Cat D-2871

BUDGET FT-101Z

We throw in a digital display kit worth over \$100! This turns the FT-101Z into an FT-101ZD!

More hams have 'cut their teeth' on one of the famous '101' series than any other rig! Rugged and reliable, with all the features you really need. Cat D-2862

OR FROM \$85 DEPOSIT AND
\$23.19/MONTH (48 MONTHS)



\$775⁰⁰

WITH BONUS DIGITAL
DISPLAY WORTH \$139!!

ANY TERMS OFFERED ARE TO APPROVED, PERSONAL APPLICANTS ONLY. ORDER BY MAIL: USE YOUR BANKCARD!

DICK SMITH ELECTRONICS

bankcard
welcome here



SHOPS OPEN 9AM to 5:30PM
(Saturday 9am till 12 noon)
BRISBANE Half hour earlier
ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY
RE-SELLERS OF DICK SMITH
PRODUCTS IN MOST AREAS OF AUSTRALIA

NSW 125 York Street,
818 George Street,
162 Pacific Hwy,
30 Grosz Street,
613 Princes Hwy,
147 Hume Hwy,
531 Pittwater Road,
145 Parramatta Rd.
SYDNEY 290 3377
BROADWAY 211 3777
GORE HILL 439 5311
PARRAMATTA 683 1133
BLAKEHURST 546 7744
CHULLORA 642 8922
BROOKVALE 93 0441
AUBURN 648 0558

VIC 263 Keira Street,
399 Lonsdale Street,
656 Bridge Road,
166 Logan Road,
842 Gympie Road,
96 Gladstone Street,
60 Wright Street,
414 William Street
QLD
ACT
SA
WA

WOLLONGONG 28 3800
MELBOURNE 67 9834
RICHMOND 428 1614
BURANDA 391 6233
CHEMUNGO 59 6255
FYSHWICK 80 4944
ADLAIDE 212 1962
PERTH 328 6944

MAIL ORDER CENTRE: PO Box 321, NORTH RYDE NSW 2113 Ph 888 3200 PACK & POST EXTRA



New Indian programme for DXers

All India Radio has joined the growing ranks of international radio stations which have a weekly programme specifically for shortwave DXers and shortwave listeners.

The new DX programme was introduced during October, and goes to air every week during the Monday English programmes.

For listeners in Australia and New Zealand, best reception is during the service beamed our way from 1000 to 1100 each evening. Current frequencies for the nightly Australia and New Zealand service from Delhi are: 17 875, 15 285 and 15 205. Keep in mind that frequencies are subject to change at short notice. Any frequency modifications are usually announced on air a few days in advance.

The programme, scripted by well-known Calcutta DXer, Alok das Gupta, will include each week a phone-in report detailing the very latest available news of happenings on the shortwave bands.

With All India Radio and Trans World Radio on Guam recently introducing DX programmes, Radio Australia is left as the odd station out, in that Australia's overseas service is one of the very few international broadcasters in the Asia/Pacific area not to have a programme in English for DXers and short-wave enthusiasts.

Hot summer nights bring Africa

Summer nights often make for good listening on the higher frequency bands as far as signals from Africa are concerned.

Late night or very early morning listening can sometimes reveal strong signals from many countries which at other times of the year may be hard to log.

Signals from eastern and southern Africa usually start to become audible from about 1330 on the 31 metre band. Watch for Mozambique on 9618, which is usually one of the first signals to become audible, and Tanzania on 9685 and 9750. Zambia operates an Overseas Service in English from 1500 on 9580 and the Malawi Broadcasting Corporation operates from Blantyre on 7130 from 1600 with English news.

Radio Uganda has recently fired up its two powerful transmitters, each of 250 kilowatts,

and one of these broadcasts from the northern town of Soroti with the English service on 6030 from 1430 to 1530. Probably the strongest African signals at this time would be from Addis Ababa in Ethiopia, from their station known as "Voice of Revolutionary Ethiopia", operating the English service from 1500 to 1600 on both 9560 and the parallel outlet of 7165.

Most of these stations will reply to correct reception reports with a verification card or letter, and these early morning broadcasts present the DXer with good opportunities to verify some of the countries of Africa which otherwise only operate on the low frequency or "tropical" bands below 5900 kHz where noise levels are an increasing problem in city locations.

All India Radio would welcome listeners' comments and suggestions concerning the new DX programme, and any

letters should be addressed to: The Director, External Services Division, All India Radio, Post Box 500, New Delhi.

Lesotho boosts signals

With the addition of new 50 kilowatt shortwave transmitters, the Lesotho National Broadcasting Service at Maseru has considerably increased the strength of their 4800 signal during our early mornings.

The two new transmitters were recently purchased by the Lesotho government in Britain, and installed at their transmitting centre at Lancer's Gap near Maseru. The station now provides good to very good reception on 4800 (Lesotho's only shortwave frequency) between about 1900 and sign off at 2110. Sign-off does vary and sometimes is as early as 2030.

Most programmes of the Lesotho National Broadcasting

Service are in SeSotho, but occasional programmes in English are also heard, notably between 2000 and 2100 every Sunday (early Monday morning in Australia) when the LNBS carries a religious programme produced in Pennsylvania, USA.

The Lesotho station generally verifies correct reception reports with a QSL card showing the national flag, and reports can be sent to: Lesotho National Broadcasting Service, PO Box 552, Maseru.

Iceland coming in well !

As mentioned in our column a couple of months ago, Reykjavik Radio's recent time shift for their Home Service relay on shortwave brought this rarely heard country within reach for Australian listeners.

Reykjavik Radio is now heard fairly regularly on 12 175 during our early mornings from 1955 to 2000 with Home Service programming beamed for Icelandic seamen and Icelandic workers in Scandinavia. Programmes are in Icelandic and consist of news, comment, music and magazine features.

The programmes are relayed directly from the Home Service programming which is usually only broadcast on medium wave. The transmitter used on 12 175 for the Home Service relay from 1855 to 2000 is at other times used for utility broadcasting purposes.

The Iceland station has the reputation of being a good veri-

fier of correct reception reports from overseas listeners. These reports should be sent to: Iceland State Broadcasting Service Ríkissutvarpid, P.O. Box 120 Reykjavik.

NOTE ! All times are given in Greenwich mean time (GMT). To convert to Australian Eastern Standard Time, add 10 hours (11 hours during Daylight Saving Time, November to February). To convert to Central Standard Time, add 9.5 hours and Western Time add 8 hours.

All frequencies are given in kHz. These notes are compiled by Peter Bunn on behalf of the Australian Radio DX Club (ARDXC). Further information on DXing or the activities of the ARDXC may be obtained from P.O. Box 79, Narrabeen, NSW 2101, for a 22¢ stamp.



Remember how great she looked last summer.

National Colour Video Camera and Portable VHS lets you keep those moments and relive them over and over.

It's so simple. Point the camera, shoot... instant result. No processing is required with automatic viewing on TV, through your National Portable VHS recorder. Light to carry and will operate under low light conditions.

Other features include:

- Power zoom control
- Brilliant colour reproduction
- Pause control
- Electronic viewfinder
- Built-in microphone
- Low power consumption.

Because time doesn't stand still...



VHS  **National**
Instant Home Video


Net 100



stereo

FEATURES:	● THE CRAFT OF THE SPEAKER BOX MAKER	150
REVIEWS:	● MARANTZ ST500	
	COMPUTER STEREO TUNER	156
	● G.R.D. PAS 30 SPEAKERS	168

The world's fastest integrated amplifier

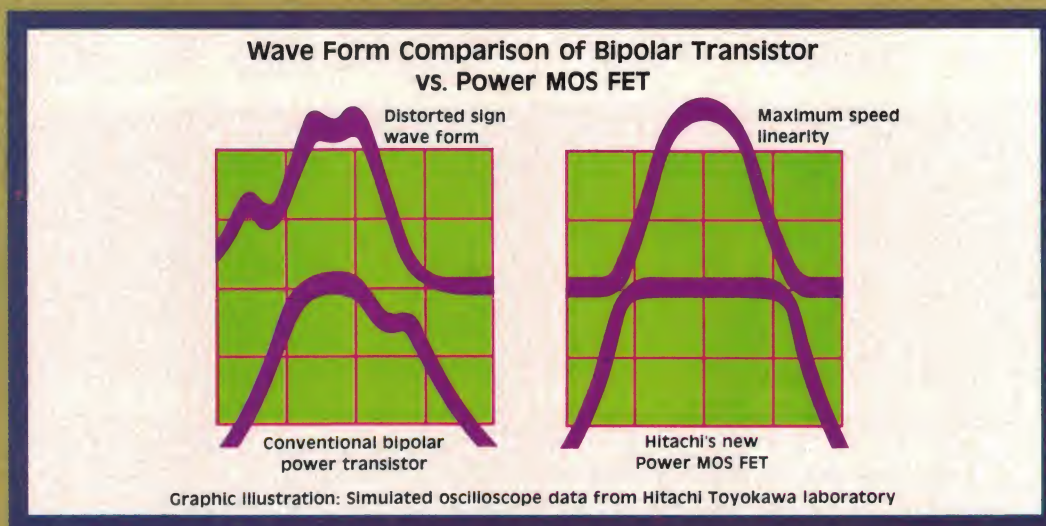

Hitachi Power MOS FET

The HA-7700 Stereo Integrated Amplifier brings you stunning sound reproduction. The Hitachi Power MOS FET offers ultra-high switching speed for dramatically reduced distortion and outstanding transient response. It features the same incredible technology that went into our renowned HMA-7500 Stereo Power Amplifier and HA-8700 Stereo Integrated Amplifier.

Power output is 70 watts per channel with no more than 0.008% total harmonic distortion from 20 to 20,000 Hz. And all stages are direct coupled, so you get the purest waveform reproduction fidelity from input to output.

The RIAA phono equalizer is a top-precision design employing only the highest-quality components for low-distortion and true-to-life disc playback. There's a full complement of control and convenience features for maximum system flexibility.

The HA-7700. True purity in waveform reproduction is here.



HA-7700



Hitachi Sales Australia Pty. Ltd., 153 Keys Road, Moorabbin, Victoria 3189 Tel: 95 8722

Forward thinking by Sansui

Sansui claim that their new Super Feedforward system completely eliminates all kinds of distortion in the power stage of amplifiers.

Feedforward techniques were actually invented 52 years ago by the same American scientist, H.S. Black, who later developed the negative feedback approach currently adopted in all hi-fi amplifiers.

In principle feedforward involves taking a fraction of the amplifier output (actually $1/a$ times the output, where a is the open loop gain) and comparing it with the input signal to derive a difference signal which is fed to the output to cancel the distortion. The system has been successfully applied in communications equipment, but it has not so far been effectively used in hi-fi amps.

Sansui's feedback system combines feedforward in the power amp stage with a relatively low level of negative feedback applied to both pre-amp and power amp. In a manner they don't explain, they have arranged things so that the NFB operates mainly at lower frequencies and the feedforward at higher frequencies.


The first of Sansui's amplifiers in which the new

Super Feedforward system has been adopted are two integrated amplifiers, the AU-D9 and the AU-D11. These have output

power ratings of 95 watts and 120 watts per channel respectively.

Both have a built-in moving coil head amp, both are direct coupled and both feature the newly developed 'C1' core power transformer.

Total harmonic distortion does not exceed 0.005% for either of these amplifiers and the quoted frequency response is the same for each, showing a variation of no more than 3 dB over the entire range from dc to 300 kHz.

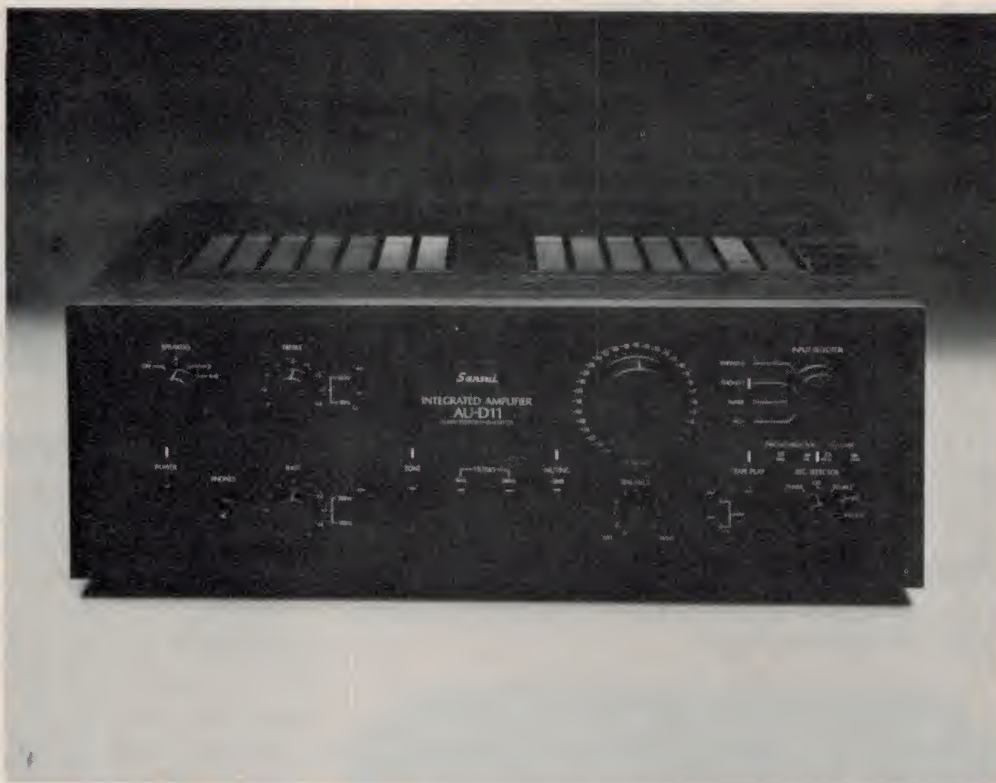

Audio level meter

Signal levels down to -72 dB can be measured by a small analogue meter recently available from Soundex.


The calibrated range of the AMM100 is from -72 dB to +22 dB. Input impedance is 100 kilohms, balanced, switchable to 600 ohms and the protected headphone output has an impedance of approximately 50 ohms, according to the specs.

The meter comes in a tough plastic case with a built-in mains adaptor and is small and light

enough to hold in the hand. It's described as a multimeter, which is odd because it appears to have only one function.

For more information, contact the distributors R.H. Cunningham Pty Ltd, P.O. Box 4533, Melbourne, Vic 3001; (03) 329-9633 or P.O. Box 214, Neutral Bay Junction, NSW 2089; (02) 909-2388.



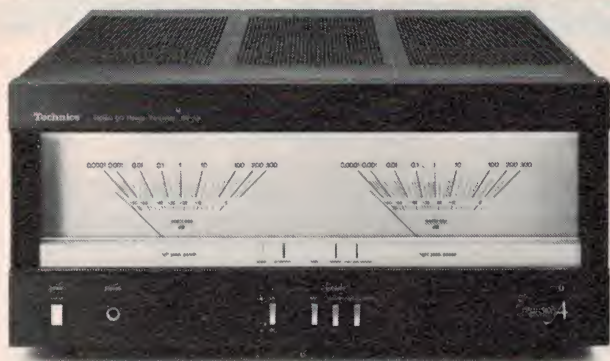

DC amp is really AB

Technics describe their new SE-A3 200 W per channel power amp as Class A, but we at ETI maintain it's really Class AB.

The reason for the disagreement is its 'synchro-bias' circuitry that samples the input waveform and adjusts the bias of the output transistors so that they are never quite cut off. This arrangement allows the efficiency of Class B operation without switching distortion.

We don't want to knock this amplifier though — its specifications are certainly impressive. Total harmonic distortion over the range from 20 Hz to 20 kHz is only 0.002%

with the amp running at its full rated power into eight ohms. At 1 kHz, THD is only 0.001%. Transient intermodulation distortion is said to be immeasurably small.

Independent left and right channel power supplies keep the channel separation up to 70 dB and signal to noise ratio is extremely high at 123 dB.

Brochures available from your local Technics dealer. Tell 'em you read about it in ETI.

Plus Series Tuners

Two tuners are included in Sanyo's recently released 'Plus Series' of hi-fi components.



The slightly more expensive model T55 has a quartz crystal reference oscillator. Frequencies of this and the controlled oscillator are digitally divided by different whole numbers and the divided signals are phase locked together with a correction signal to keep them precisely in phase.

A two-position IF bandwidth switch allows selection of a narrow bandwidth for 80 dB alternate channel rejection when FM stations are closely spaced.

The Plus T35 AM/FM tuner has a sampling quartz locked tuning system. Tuning is simplified

by the provision of a LED bar graph signal strength indicator and a 'centre of signal' position indicator. Both these displays use high gain decoupled voltage comparators.

For correct balancing levels when recording from the FM tuner onto tape, the T35 has a record level calibrator with adjustable output level. This provides a 400 Hz tone at a level equal to the level of the tone produced by an FM signal with 50% modulation.

Suggested retail prices are \$470 for the T55 and \$399 for the T35.

A new approach to noise

Phase Linear's new noise reduction system is claimed to reduce noise by 10 dB even on recordings that have already been Dolby or dbx processed.

The 1300 Series Two system is based on what Phase Linear claim is the principle that "The human ear doesn't hear noise when accompanied by music." It incorporates circuitry that recognises harmonic relationships. What the circuit recognises as 'music' is sent direct to the output stage; what it thinks is 'noise' is expunged.

But not all music nowadays consists entirely of harmonious mixtures of tones that an elec-

tronic circuit can recognise.

Much avant-garde serious and popular music uses some sounds that in other contexts would be considered noise.

Phase Linear's circuitry is probably not capable of sensing when this is happening and lovers of such music would perhaps be better off not spending \$349 on a machine which is likely to impose a kind of aesthetic censorship on them.



Planar 2 released in Australia.

The Rega Planar 2 turntable, once described by UK magazine Hi-Fi Answers as at least the third best in the world, is now available in Australia.

Intended as a 'budget' version of the renowned Planar 3, the Planar 2 turntable alone sells for \$335. Price with its own tonearm is \$445 and a cartridge adds a further \$45 to the price.

The Planar 2 is fundamentally a very similar design to its illustrious up-market relative, with a few modifications to reduce the cost. The glass platter

is somewhat thinner, the mat is also thinner and rubber backed instead of being all felt and the base is made of chipboard instead of laminate.

Rega Planar turntables are made in the UK and distributed in Australia by Concept Audio Pty Ltd, P.O. Box 422, Dee Why, NSW 2099. (02) 938-3700.



SONY®



Heavy.

Introducing another Sony only. The MDR series open-air headphones. The smallest, lightest stereo headphones available today. Or tomorrow.

With our lightest at 40 grams, you will barely know you're wearing them. Yet the sound is dynamite.

Through a remarkable new audio breakthrough, our engineers have succeeded in reducing big-headphone technology down to the size of your listening channels.

The MDR series headphones' airy spaciousness delivers absolute clarity through an ultra-small driver

unit that produces more than three times the energy of conventional circuits. And a new high-compliance diaphragm accurately reproduces the 20 to 20,000Hz bandwidth and improves low-range response.

That means you can listen to the heaviest of music for hours. Lightly. And know that you're hearing every nuance of the original recording from deep bass to the highest treble.

Listen to our new MDR series headphones.

They're light. And heavy.



STEREO HEADPHONES
MDR

Please print clearly

Name

Address

Postcode

Please send me

I enclose cheque/money order, No.

Signed

Disco Lite units @ \$49.99 each plus \$2 post and handling.

TOTAL \$

MAIL ORDER

DISCO LITE

3-IN-1 LIGHT CONTROLLER



PC410

- Great for parties, advertising displays, Christmas tree lights etc.
- Light dimmer for mood and effects lighting
- Variable speed strobe
- Flashes lights to beat of music

FEATURES

- Plugs directly into 240 V power socket, no wiring needed
- Three position switch selects (1) "music colour" (using coloured lights) that flashes lights to beat of music — built in microphone, variable sensitivity control; (2) "strobe" effects for flashing lights at variable speed; (3) light dimmer with variable intensity
- Continuously variable control provides complete flexibility in all modes of operation
- Can be used with 240 V filament lamps to the total of 500 watts
- Double insulated
- S.E.C. approved and fully guaranteed.

\$49.99

Post and Handling: \$2.00

We regret we cannot supply New Zealand readers. Mail this coupon or a photostat to: 'Disco Lite Sales', ETI Magazine, 15 Boundary St, Rushcutters Bay NSW 2011.

This magazine is acting as a clearing house for orders. Make out your cheque or money order to 'ETI Disco Lite Sales'. We will process your order and send it on to A & R who will mail you the goods. Please allow up to four weeks for delivery.

The PC410 Disco Lite is a product of A & R Electronics, manufactured under the Arlec label.

While these units are sold through some retail outlets, they are not generally available and ETI has arranged to offer them to readers via mail order.

THE INCREDIBLE STUDIO 1000



N.B. MARUNI microphones take some beating too!!!

MARUNI

SUPERLATIVE HEADPHONES AND MICROPHONES

THE **MARUNI** CORPORATION

297 WILLIAMSTOWN ROAD, PORT MELBOURNE, 3207 • TELEPHONE, 645 2079 • TELEX 32571

RARE ADDITIONS FROM MARANTZ. SUPERIOR FM TUNERS.



Rare: very valuable.

Additions: the things added.

Marantz: a range of ultra-high performance FM Tuners which blend state-of-the-art engineering with operational versatility.

The name Marantz guarantees your choice from a superior range of AM/FM Stereo Tuners, guarantees exceptional quality and, with the advent of more FM stations, Marantz guarantees your total listening pleasure.

MARANTZ ST500

AM/FM STEREO COMPUTUNER

Sleek, slimline and microprocessor controlled — tune and recall stations with amazing speed and precision. The Computuner features state-of-the-art, quartz-locked, drift free frequency synthesised tuning with 7AM and 7FM memory presets. The LED signal strength display doubles as a multipath indicator and the Wide and Narrow IF Selector enables the switching of a tuning bandwidth best suited to reception area conditions.

MARANTZ ST600

AM/FM STEREO TUNER

This model incorporates a built-in oscilloscope that affords the most precise means possible to determine optimum reception, even from weak or distant stations. The functions of the oscilloscope extend well beyond those of conventional tuner meters.

MARANTZ ST400

AM/FM STEREO TUNER

A large, fuss-free Vacuum Fluorescent readout clearly displays the selected frequency and Electronic Gyro-Touch with Servo-Lock guarantees drift-free, razor-sharp tuning every time. Uncompromising quality through and through.

MARANTZ ST300

AM/FM STEREO TUNER

Consistent with all quality Marantz tuners, the ST300 features MOSFET FM front end and Phase Lock Loop demodulator for superlative performance — low distortion, extremely linear operation and wide dynamic range. Illuminated dial cursor, LED function indicators and Gyro-Touch tuning make the ST300 an exceptionally sophisticated buy at a modest price.

Your Marantz stockist will be pleased to demonstrate the complete range of Marantz tuners. If you see your hi-fi as an investment and, if you demand critical performance standards as well as the best value for money, listen to the future.

Listen to Marantz.

marantz
Now you're listening.

Distributed by: MARANTZ (AUST.) PTY. LTD.
32 Cross Street, Brookvale, N.S.W. 2100
Telephone: (02) 939 1900 Telex AA 24121
Melbourne (03) 329 7655 Brisbane (07) 48 8882
Adelaide (08) 223 2699 Perth (09) 328 3874

TEAC breaks away from tape.

The introduction of a new amplifier system marks a break with TEAC's former policy of specialising in tape recorders.

The PA-7 preamplifier and its complementary MA-7 power amp are both direct coupled designs with exceptionally high slew rates. The MA-7 is claimed to have no more than 0.003% distortion from 10 Hz to 20 kHz and the PA-7's distortion is said to be less than 0.005% over the same range. TEAC neglect to say at what output power these figures were obtained.

To avoid damage caused by dc voltages appearing on the signal path (which can be very dangerous for a DC amp), the PA-7 incorporates special protection circuitry and muting relays that shut off the output if any signal below 2 Hz and above 60 mV appears. This same circuit



prevents the popping noise that would otherwise appear because of power surge when the unit is switched on and also prevents clicks when switching phono inputs.

The PA-7 has a moving coil headamp built in. Input sensitivity on the moving coil input is 5 mV at 1 kHz and the frequency response is better than 20 to 20 000 Hz at ± 0.2 dB for any

The MA-7 power amplifier can deliver 150 W per channel into eight ohms. It has completely separate power supplies for left and right channels.

Arena for A & R

The highly-regarded products of the UK company A & R will soon be marketed in Australia by Arena Distributors.

A & R's reputation is based on their A60 amplifier, a slimline unit with a nominal rating of 35 watts into eight ohms, whose success is largely due to its reliability and ability to cope with a wide variety of input sources without distortion. The company also make an FM stereo tuner and have recently introduced a moving coil head amplifier in response to demand from audiophiles.

The company is still basically a cottage industry, producing a

relatively small number of units which are all subjected to rigorous checks before they are released from the factory.

For example, to test the overload protection, all amplifier circuit boards are given a short circuit on the output terminals for ten seconds at full power.

For more information on A & R products contact Arena Distributors Australasia Pty Ltd, P.O. Box 178, East Victoria Park, WA 6101. (09) 361-5422.

Audible demagnetisation

A tape head demagnetisation device just introduced into this country from the USA emits an audible tone that rises in pitch as the demagnetisation proceeds.

The Whistle Stop demagnetising cassette contains an oscillator whose frequency increases from below 60 Hz to well over 20 kHz in the course of six seconds after the 'Play' switch on the tape recorder is pressed. The oscillator output is applied to a built-in demagnetising coil that produces an alternating magnetic field of gradually increasing frequency.

The oscillator output has a constant amplitude, but because the reluctance of the coil


increases with frequency the amplitude of the alternating magnetic field at the heads steadily diminishes as the frequency increases. This results in effective demagnetisation of the heads.

The Whistle Stop comes in a standard size cassette case, equipped with its own batteries, and retails for \$19.95. It is distributed in Australia by Concept Audio Pty Ltd, P.O. Box 422, Dee Why, NSW 2099. (02) 938-3700.

Scaling the peaks

The Soundex division of Bulglin Electronics recently released a full range of audio peak programme meters.

They are available in three different standards in both single channel and stereo. The Series 100 was designed to meet the exacting requirements of the British Broadcasting Corporation, the Series 300 is designed to DIN 45406 and BS 5428 (Type 1) and the Series 400 is an economy version that closely resembles the BBC style



The meters comprise a sophisticated meter movement with fast ballistics and an amplifier with a high input impedance and low thermal drift. More information from the distributors, R.H. Cunningham Pty Ltd at P.O. Box 4533, Melbourne, Vic 3001. (03) 329-9633 or P.O. Box 214, Neutral Bay Junction, NSW 2089. (02) 909-2388.

sound engineering



Hitachi's Photo Sensing Straight Tonearm

The optically-activated straight tonearm eliminates side force and reduces mass to keep the HT-60S Turntable in line with excellence.


The photo sensing straight tonearm is sound engineering. Precision engineering. Optical activation does away with the side force that's common to conventional systems. And the straight tonearm is significantly lower in mass, so sound quality is greatly improved. In the HT-60S Turntable these two design advances are joined by a Quartz-locked Uinitorque motor. It makes every revolution of the platter exceptionally smooth. Wow and flutter is just 0.025% WRMS.

The benefits of non-contact switching are readily apparent — every time you play a record. Distortion-producing mechanical parts have been replaced by a light beam and a photo sensitive cell. There's no drag, less required tracking pressure and it's very reliable.

The straight arm is a responsive design that cuts resonance way down and resists oscillation. And it can be used with a variety of high-performance, low-compliance cartridges.

The HT-60S Turntable is fully automatic, of course. But all auto functions are independently powered, so there's no drain on the main drive motor. And the controls for those functions are right up front. You never have to lift the dust cover to get to them.

Hitachi technology is at work to bring you greater turntable accuracy through advanced design and electronics. The HT-60S Turntable with photo sensing straight tonearm and Uinitorque with Quartz is the result of those efforts. Listen to the soundness of Hitachi engineering today.

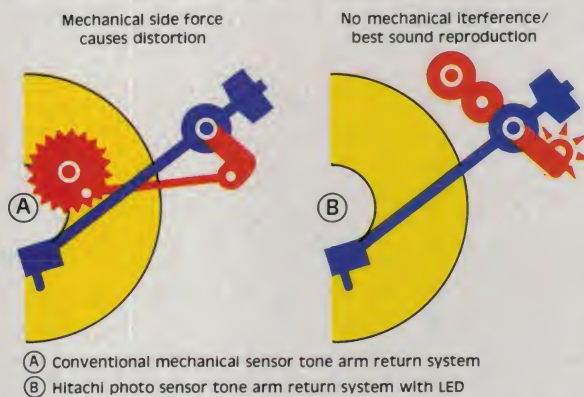

Graphic illustrations are reconstructed from Hitachi Toyokawa audio laboratory data.

Professional sound through sound engineering

HT-60S





A woman is shown from the waist down, wearing a white short-sleeved shirt tied in a knot at the waist and light blue denim shorts. A pack of Drum cigarettes is tucked into her waistband. She is holding a lit cigarette in her right hand. The background is a solid light blue color.

WHO SAID 'MEN SMOKE DRUM'?

The natural
satisfaction of
full flavoured,
imported Drum.
It's the most
enjoyed ready—
rubbed cigarette
tobacco in
Australia.



Instructions on how to make your own pc boards using the Scotchcal method and exposing through this page may be found on page 113 of the March '80 issue.

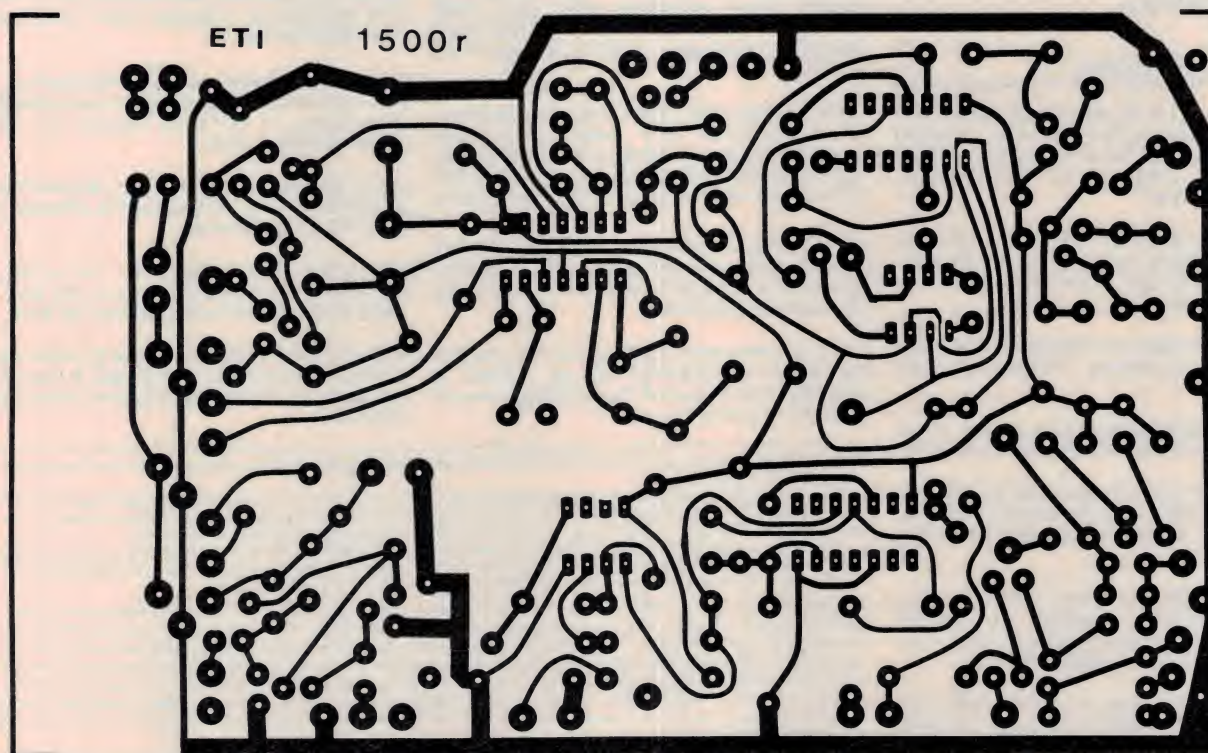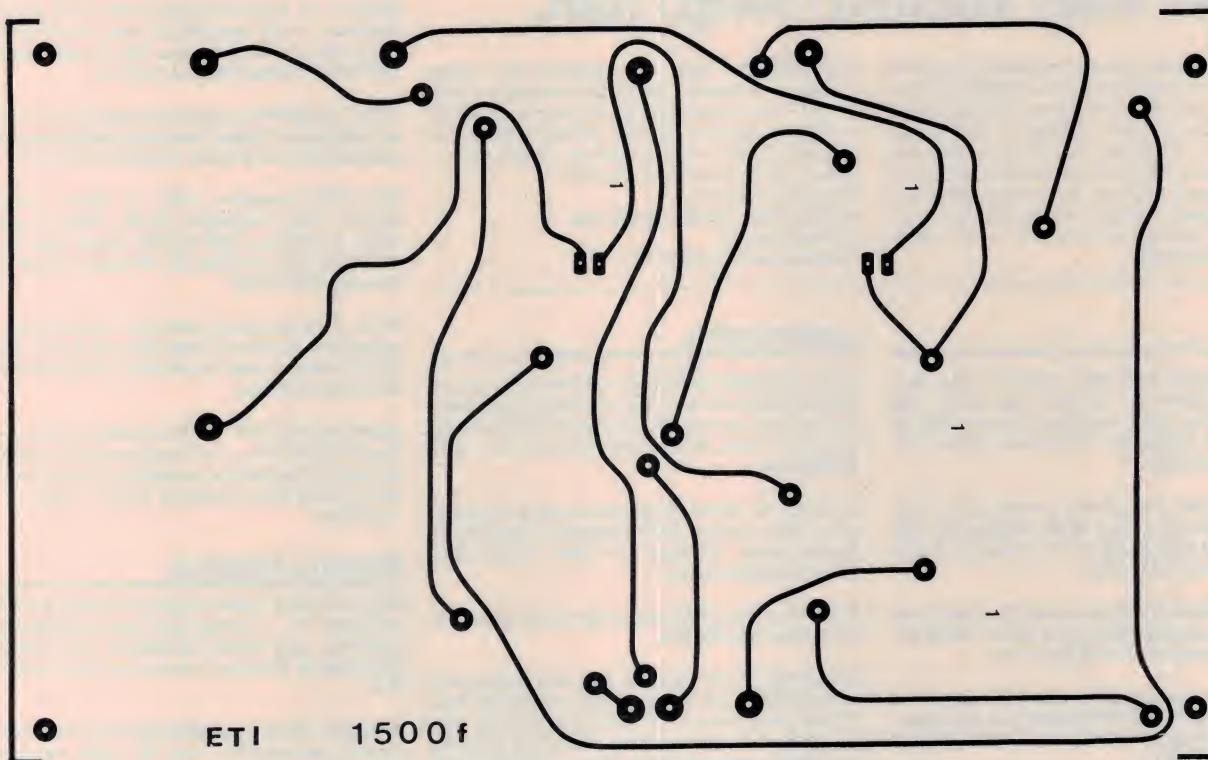

MINI-MART

Where readers can advertise — For Sale/Wanted/Swap/Join.

• We'll publish up to 24 words (maximum) totally free of charge for you, your club or your association. Copy must be with us by the 1st of the month preceding the month of issue. Please — **please** — print or type adverts clearly, otherwise it may not turn out as you intended! Every effort will be made to publish all adverts received however, no responsibility for so doing is accepted or implied. Private adverts only will be accepted. We reserve the right to refuse adverts considered unsuitable.

• **Conditions:** Name and address plus phone number (if required) must be included within the 24 words. Reasonable abbreviations, such as 25 W RMS or 240 Vac, count as one word. Adverts must relate to electronics, audio, communications, computing etc — general adverts cannot be accepted. Send your advert to:
ETI Mini-Mart, Modern Magazines
15 Boundary St,
Rushcutters Bay NSW 2011

AUDIO

SELL: Kenwood KSQ-400 amplifier. Use as 4 channel decoder or stereo amp \$100. Pair speakers 2-way 25W, excellent sound \$100. M. Johnson, 31 Hazei St, Girraween, NSW 2145. Phone (02) 631-2092.

The Tape Club of Australia invites you to join others in this new club. Make friends all over Australia and New Zealand. Full details P.O. Box 118, Wellington, NSW 2820.

Acoustic Research XB1 turntable. Exc cond, new Shure mag. cartridge. Very good specs. Must sell. \$180 o.n.o. Phone Chris (02) 939-7141.

QUAD 22 valve preamplifier \$85. Dynaco Mark 3 mono valve power amps 60W RMS, mint condition \$400 pair. G. Page, 17 Elm St, Unley Park, SA 5061. Phone (08) 271-9191.

AMPLIFIER wanted. Phase Linear 400. Must be in good original condition. For sale. Sansui AU717, only \$440. Phone Peter (08) 31-5220 after 6 p.m.

COMMUNICATIONS

WANTED: R.1155-N, Ex-R(A)AF communications receiver, preferably working but other condition/model acceptable. I have appropriate manual. John Lavender, 3 Raw Place, Farrer, ACT 2609. Phone (062) 86-4029.

AUSTRALIAN Radio DX club for shortwave, mediumwave DXers. For a sample copy send one 22c stamp to P.O. Box 79, Narrabeen, NSW 2101 mentioning this ad.

WANTED: Valve type communications receivers. All ages and conditions. Phone Peter (042) 29-5047 a.h.

WANTED: Teleprinter, mod 15 or similar. J. Lee, MS 30, Chinchilla, Qld 4413. Phone (074) 65-8183.

SELL: SX-190 extra crystals \$165 or exchange for Barlow Wadley MKII or DR-28. N. Giaros, 11 Norman St, Underdale, SA 5032. Phone (08) 43-4981.

YAESU FT-7 SSB transceiver. Ideal for novice, 80m-10m, excellent condition, all manuals, accessories and mounting bracket. \$429 o.n.o. Phone Stephen Dennis (02) 630-5552 a.h.

TELETYPE ASR-33 good condition \$550 o.n.o. John Delforno, 4 Argyle St, Glenroy, Vic 3046. Phone (03) 306-1464.

COMPUTERS

SELL: OSI(6502) 8K BASIC in ROM (4 x 2k chips). I have changed to disk and no longer need them. \$80 the set of four. Geoff Cohen, 72 Spofforth, Holt, ACT 2615. Phone (062) 54-7608 b.h., (062) 49-2688 a.h.

SYSTEM 80 owner would like to swap programs with other owners. Mark Fairbairn, 8 Shelley St, Spring Gully, Bendigo, Vic 3550. Phone (054) 42-4450 weekend only.

S100 16K static RAM Board, 450 ns, ETI-642. \$280. Alan Peek (02) 89-1450.

Z80 STARTER KIT: Hex key pad, hex address and data displays, 2 x S100 sockets, wire wrap area, PROM programmer, parallel port, Kansas City cassette interface, timer chip (Z80 CTC), 2K monitor PROM, monitor listing, 120 page manual, 2K RAM. \$250 o.n.o. Phone Paul Forte (03) 615-4183 b.h., (03) 543-5451 a.h.

S100 SYSTEM sale, DG640 \$120, 8K RAM \$150, monitor \$150, mainframe \$120 plus VDMII, modem, keyboard, 2650, SCMP IO. 466 North Rocks Rd, Carlingford, NSW 2118. Phone (02) 871-2858.

JOIN OMEGA (OSI Microcomputer Enthusiasts Group Australia) and receive newsletters, hardware mods and software exchange details. Contact Geoff Cohen, 72 Spofforth St, Holt, ACT 2615. Phone (062) 54-7608 a.h., (062) 49-2688 b.h.

OSI C2/4/8 owners, join 540-Board Mutual Benefit Society. Resources all areas. Need members. Please send S.A.E. to Peter Meulman, 4 Halsmere St., Geebung, Qld 4034.

SELL: Crystals, new 12MHz, divide down to MPU frequencies (6,4,3,2,1MHz are all factors) 12 available — \$4.50 each. N. Cook, 22 Brightman St, Flagstaff Hill, SA 5159.

COPYRIGHT: The contents of Electronics Today International and associated publications is fully protected by the Commonwealth Copyright Act (1968).

Copyright extends to all written material, photographs, drawings, circuit diagrams and printed circuit boards. Although any form of reproduction is a breach of copyright, we are not concerned about individuals constructing projects for their own private use, nor by pop groups (for example) constructing one or more items for use in connection with their performances.

Commercial organisations should note that no project or part project described in Electronics Today International or associated publications may be offered for sale, or sold, in substantially or fully assembled form, unless a licence has been specifically obtained so to do from the publishers, Modern Magazines (Holdings) Ltd or from the copyright holders.

LIABILITY: Comments and test results on equipment reviewed refer to the particular item submitted for review and may not necessarily pertain to other units of the same make or model number. Whilst every effort has been made to ensure that all constructional projects referred to in this edition will operate as indicated efficiently and properly and that all necessary components to manufacture the same will be available no responsibility whatsoever is accepted in respect of the failure for any reason at all of the project to operate effectively or at all whether due to any fault in design or otherwise and no responsibility is accepted for the failure to obtain any components parts in respect of any such project. Further, no responsibility is accepted in respect of any injury or damage caused by any fault in the design of any such project as aforesaid. The Publisher accepts no responsibility for unsolicited manuscripts, illustrations or photographic material.

SELL: Dream 6802 with H/D power supply, cassette recorder, tapes, spare ICs, no bugs. \$200. P.O. Box 283, Carnarvon, WA 6701.

WANTED: Documentation for Polymorphics CPU card 101031, and VIDEO card (Especially I/O pinouts, jumpers and monitor commands). Xerox or original. Ken Grimes, 51 Dudley St, Sherwood, Qld 4075. Phone (07) 379-3895.

EA2650 1K microcomputer with CUTS cassette interface. Fully assembled and working \$100 o.n.o. Roy Anton, P.O. Box 333, Coonabarabran, NSW 2857. Phone (068) 42-1470 a.h.

WISH TO SWAP my Sargon computer chess book or program for Eddie Paay level II ROM map. Cash adjustment if necessary. Phone (02) 337-2317.

Z80 S100 computer. 48K. 5" Drive, Selectric printer, VDU, keyboard. CP/M, Macro assemb, word processor, disk BASIC, chess and more. \$2500. A. Peek, 10 Gale St., Woolwich, NSW 2110. Phone (02) 89-1450.

SELL: TRS 80 Level II with 32K, numeric pad and expansion interface. Also disk drive and Axiom EX 801 microprinter. Best offer. Max Hooper (02) 399-5158 evenings.

COMMODORE PET — 16K business version and Decwriter printer — full documentation, software including diagnostics, assembler, editor, listings, circuit diagrams, manuals \$1400. Phone Chris 419-4424

MISCELLANEOUS

SELL: Schober theatre organ, kit-built. 2 x 61 note manuals, 16' - 1' voicing, pre sets, couplers, percussions, tape-reverb, amplifiers etc. Complete and playing. Bargain opportunity. Gary (03) 233-5510.

WANTED: Wireless World May 1972 or data of advanced preamplifier. Pay \$5. Very desperate. Louis Ziras, 144 Beavers Rd, Northcote, Vic 3070. Phone (03) 481-1209.

SELL: Amplifier, Playmaster Twin 40, built and tested. Kit costs \$129, will sacrifice at \$80 cash. 7/14 Burtfield Dr, Chiswick, NSW 2046. Phone Chris (02) 712-1460.

FOR SALE: Automatic telephone equipment. 25 pos. switches 200 relays. Sell or exchange. E.A. Whatmough, 14 Heriot St, Lismore, Vic 3524. Phone (03) 055-962145.

SELL: Magazines. ETI 72-79 inc., EA 69-79 inc., PE 69-78 inc. Greg, 12 Coombell St, Jindalee, Qld 4074. Phone (07) 376-1484.

SELL: Wire wrap sockets, new, 14 pin DIL, in boxes of 7. Ten boxes available — 50c each. N. Cook, 22 Brightman St, Flagstaff Hill, SA 5159.

CAPACITORS: Tants 220uF 10vw \$3 100uF 25vw \$2 Met. Poly. 3uF3 \$1 + 40c pep. R. Barratt, 2 Davidson Av, Parkholme, SA 5043. Phone (08) 277-2982.

**CASSETTE
SPECIALS
C90**

PHILIPS LOUDSPEAKERS

PROFESSIONALLY DESIGNED SPEAKER KITS

If you are in the market for a \$2000 set of speakers with only a few hundred dollars in your pocket, we could have just what you want. The ETI 4000 Series Speakers — using Philips Drivers — compare very favourably with speakers costing twice to three times as much. If you are on a really tight budget you could consider the Philips AD12K12 kit — a 70 watts r.m.s. per channel 12" 3-way system — which you assemble completely in about 2 hours. A steal at under \$300 per pair. You can buy all components with or without boxes, any way you like. We have both the ETI 4000-I and II on display, as well as other Philips Kits. Come in for an audition, or write for further information.



Price per box
of 10

OPUS UD	\$19.00
AMPEX PROFESSIONAL	\$16.90
AMPEX 20/20	\$21.30
AMPEX GRAND MASTER I	\$36.00

Mail order charges:

Up to 20: \$2.75
20 to 50: \$3.50
Over 50: \$5.00

northpoint hi-fi


100 Miller St, North Sydney.
Ph 922-7780.

jaycar

PTY LTD

380 SUSSEX STREET, SYDNEY, NSW
P.O. BOX K39, HAYMARKET 2000
Telephone 264-6688

AUDIO SPECTRUM ANALYSER



The 489 Analyser can be used in conjunction with a Graphic Equaliser to accurately equalise systems for room acoustics.

Features:

- Ten octave spaced displays
- LED readout in 3 dB steps.
- Input sensitivity control.
- Inbuilt pink noise generator.

Complete kit includes matched LEDs, polarised plastic display, complete metalwork, etc.

ONLY \$142 plus \$3 freight.

100 WATT POWER SLAVE

This rugged, compact amplifier is ideal for PA, disco, foldback or guitar amp use. 2-input Preamp with tone controls or 10-way Equaliser can be built into the same cabinet.



Features:

- Robust construction.
- Handles for portability.
- Cannon mains input, quick connect speaker terminals.
- Attractive finish in light grey.

Complete kit ONLY \$105 plus \$3.50 freight.
2-input Preamp with front panel \$25.

Introducing a totally new concept in stereophones.

The new Koss HV/X high velocity stereophone represents a remarkable breakthrough in hear-thru stereophone design and performance. For the first time, Koss engineers have been able to create a lightweight, hear-thru stereophone that combines the transparency of high velocity phones with the superior bass performance of closed-type phones. The result is a breathtaking musical experience.

CONTOURED VARIABLE-DENSITY EARCUSHIONS

While most lightweight, hear-thru stereophones have earcushions that fit against the ear, the new Koss HV/X features a unique, contoured, variable-density cushion that fits around the ear. Not only does this unique earcushion design create a far more comfortable stereo-
phone but it has also allowed Koss engineers to create a dramatically better element



design as well.

These new variable-density earcushions are made up of a very porous material that is acoustically transparent at the perimeter of the earcushion yet compressed toward the center region. This varies the pattern of acoustic resistance over portions of the earcushions creating the proper seal for specific bass frequencies while al-

lowing the flow of middle and high frequencies at the perimeter of the earcushions.



LIGHTWEIGHT ELEMENT

The uniqueness of the new variable-density earcushions made it possible

for Koss engineers to design a lightweight element that reproduces a Sound of Koss you have to hear to believe. Incredibly, even though the overall weight of the element was reduced, Koss engineers were able to develop a magnet with enough magnetic density to drive an extra large diaphragm. With a response range of 15 to 35,000 Hz, the new Koss HV/X will drive you into ecstasy and our competitors nuts.

HEARING IS BELIEVING.

Slip into the new Koss HV/X or HV/XLC with volume/balance controls at your audio dealer soon. You'll like the best of both worlds: the open, airy, up-front sound of hear-thru stereophones and the deep, rich bass performance of closed-type stereophones.

For more information on the HV/X and our full line of stereophones write to



ELECTRO-VOICE AUSTRALIA PTY. LTD.

© 1980 Koss Corp

KOSS® stereophones/loudspeakers
hearing is believing™

ELECTRO-VOICE AUSTRALIA PTY. LTD. 174 Taren Point Road, Taren Point, NSW, 2229. Phone (02) 525-8588.

Not Hazardous To Your Head.

Cleaning a video cassette recorder is one thing, not hurting the heads is another. The new Allsop VHS Video Cassette Cleaner completely cleans the (1) Audio Head, (2) Video Head, (3) Pinch Roller and (4) Capstan. It saves your head because: 1. It's a healthy alternative to the abrasive continuous loop tape cleaner. Push play button to start; it stops automatically. 2. Uses a soft, absorbent cleaning chamois to clean video and audio heads in about 4 seconds flat. 3. Uses non-abrasive felt pad to wipe pinch roller and

capstan clean. Saves you money. You can use the original Allsop Video Cleaner forever. Cassettes should be cleaned every 30 to 50 hours of playing time and replaced after one year - with a replaceable cleaning cartridge supplied with solution. This eliminates the necessity of purchasing another complete cassette.

Available at all leading
retailers of video products.

Sole Australian distributor:
Communications Power
Inc. (Aust) Pty Ltd
P.O. Box 246, Double Bay
NSW 2028. (02) 357-2022
Telex AA23381



The craft of the speaker box maker

There's more to making a speaker box than first meets the eye. Despite automated woodworking machinery, or more likely, with its assistance, the manufacture of speaker boxes is still more a craft than an assembly job.

NEXT TIME you walk into a hi-fi store, have a look at the loudspeakers on display. Chances are that, despite the Japanese, European or even American 'brand name', it has been assembled here, using a locally-made box. It's a big industry, in terms of quantity, and competition is tough at both the so-called 'budget' end of the market as well as the 'top-line' end. At each year's annual Consumer Electronics Show we have never failed to be *staggered* at the array of speakers, both in kit form and ready-made, on display. Quite apart from the number of 'all-Australian' speakers available, we were recently surprised to learn the extent to which overseas companies have their speakers locally assembled.

So, when Chadwick Audio Furnishings Pty Ltd offered to show us their factory, we jumped at the opportunity. We found the whole operation fascinating and thought readers might like to see 'behind the scenes' too. Our photographer, Ivy Hansen, followed the proceedings and recorded the 'evolution' of a speaker box from blank board to the finished article.

The company

Chadwick Audio Furnishings was started in 1972 by Wayne Chadwick. The venture began life as virtually a 'hobby' business which Wayne conducted from his home (as all good hobby businesses start ...). Business progressed apace and an associate, David Crabtree, bought into it in 1974. In 1978, the firm became a proprietary limited company with David Crabtree at the helm and in mid-1978 he bought factory premises in the Sydney industrial suburb of Silverwater and installed some quite sophisticated woodwork production machinery.



David Crabtree

Apart from doing a considerable amount of OEM work, Chadwick produce a small range of locally designed loudspeakers, dubbed their "Executive" range. Top of the line is the Executive Monitor, a four-way system, then the Executive 12, followed by the Executive 10. All are finished in wood veneer — in which the company specialises.

Okay, okay — we can hear readers clamouring already for us to review a pair from the Executive range, especially as they're Australian designed and manufactured (see November editorial). All in good time. Apart from speaker boxes, Chadwick make speaker stands and equipment cabinets.

What happens

The pictures tell the story, for the most part. Great sheets of veneered and plain particle board provide the raw material. Particle board is ideal for speaker box

material as it's dense, has generally uniform characteristics, is easier to 'work' than timber and boxes generally suffer from fewer resonance problems compared to timber. It's less expensive, too. The sheets are cut into appropriate strips, calculated so that the least waste is produced.


The cabinet top and sides are formed from a single strip, grooved and chamfered so that it can be folded around the front and rear panels. That edge of the strip which is to appear to the front of the cabinet is specially grooved so that it can be 'rolled back' on itself and glued, the veneer then continuing around the front lip of the cabinet right to the front panel. Very cunning — and a precision job.

The panels then have the corner chamfers cut in them. Power driven circular blades cut two slots at 45° to the plane of the panel right to the veneer, without *cutting the veneer!* The veneer then acts as a hinge when the panel is assembled. It's quite a precision job, too.

At the same time, the front and rear panels have the appropriate holes cut in them and all the pieces are brought together for assembly. Glue is run in the grooves in which the front and rear panels sit, the panels inserted and the cabinet literally folded together around the front and rear panels. The box is then put in a jig for setting. Small strengthening 'chocks' are glued in at this stage. When ready, the cabinet is cleaned up and sent for oiling or spraying and final finishing work. If drivers and crossover etc. are to be assembled in the box, then it goes to a final assembly line, otherwise it's packed and shipped to the customer. Assembled speakers are tested before despatch. There you have it! The 'evolution' of a speaker box, from blank board to finished article. ●



A) It all starts here. Sheets of particle board are sawn into required strips on this huge bench saw. The blade, which can be seen in the centre of the picture, moves across the bench, slicing the board like a knife through butter.

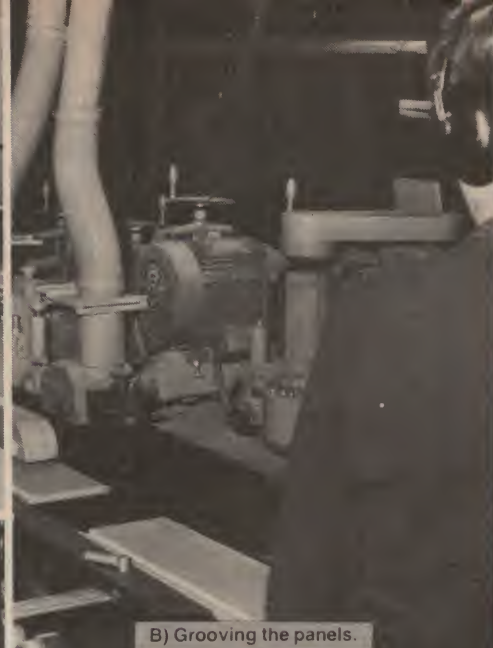

B) Grooving the panels.



C) The groove for the rear panel can be seen at right, the front lip, left, is cut, rolled around and glued on itself so that the veneer continues around the front lip of the cabinet, providing a better finish.



D) The grooved strip has the front lip rolled and glued on this machine.



G) Glue is run in the grooves, the front and rear panels assembled in place and the cabinet folded around them. The box is then placed in the jig, visible behind the operator here, for setting.



E) Cutting the corner chamfers. This machine can make a precision depth cut at 45°, leaving the veneer as a 'hinge'.



F) Cutting holes for the drivers in the front panel of a two-way speaker box.



H) When ready, the box is removed from the jig and cleaned before final finishing.



I) Some cabinets are sprayed, others are oiled to provide the required surface finish.



J) A stack of boxes awaiting final finishing. Chadwick take great care to preserve the quality of the surface finish.



K) Final assembly of complete loudspeakers.

fact:
there's a Shure
microphone
that's right for your
application
& equipment...



SM81

First of the new breed of high-performance, studio-quality unidirectional condensers—technically state-of-the-art, exceptionally rugged and superb sound.



SM59

You've seen it on TV musical shows where sound quality is a must. Unidirectional, dynamic with *exceptionally* flat response, extremely low handling noise, mellow, smooth, and accurate sound.




SM58

The most widely used "on-stage" hand-held dynamic cardioid microphone—the world standard noted for its distinctive, crisp sound.



UNIDYNE® III


The world-famous UNIDYNE® III family offers top value per dollar. Uniform cardioid pattern helps control off-axis coloration, background noise, and feedback.



SM61

Omnidirectional dynamic. Outstanding low handling noise. Handsome, smooth looks with new VERAFLX® dent-resistant grille—a favorite on-camera mic with soundmen and entertainers.

fact:
the microphone
is your link
with your
audience

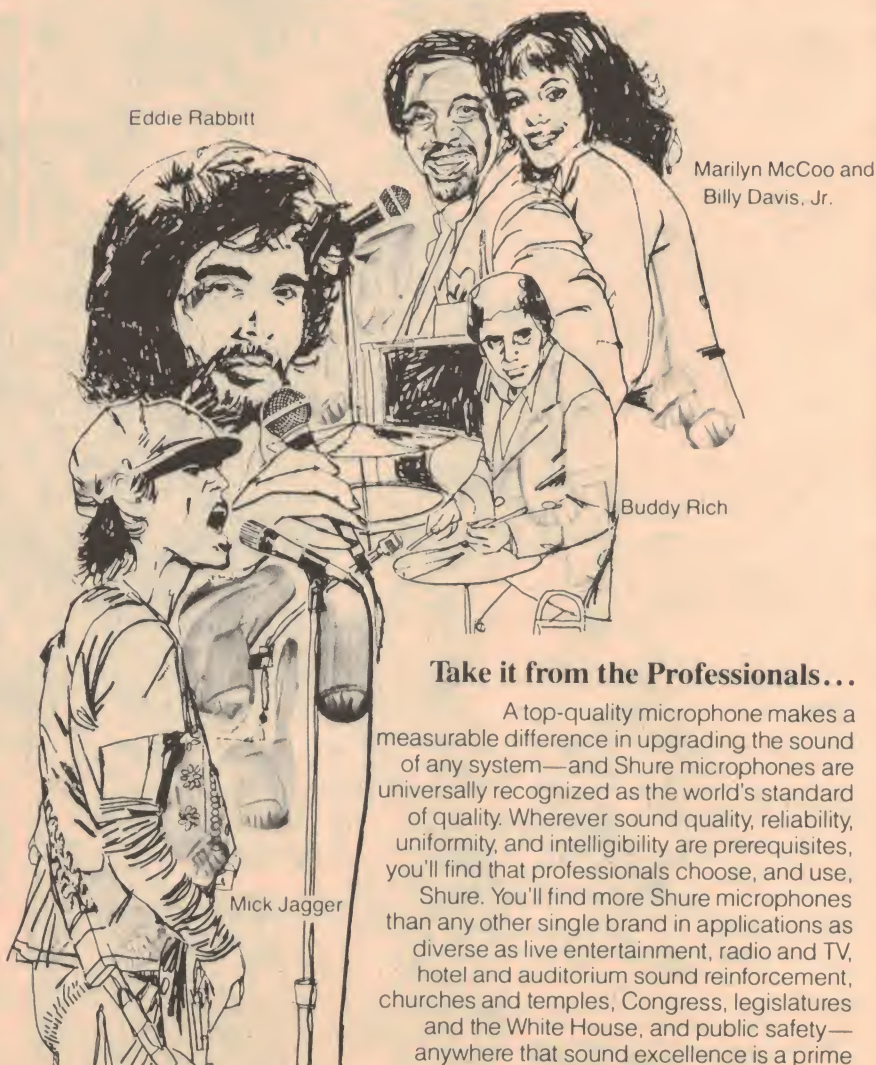

Eddie Rabbitt

Marilyn McCoo and
Billy Davis, Jr.


Buddy Rich

Mick Jagger

Take it from the Professionals...

A top-quality microphone makes a measurable difference in upgrading the sound of any system—and Shure microphones are universally recognized as the world's standard of quality. Wherever sound quality, reliability, uniformity, and intelligibility are prerequisites, you'll find that professionals choose, and use, Shure. You'll find more Shure microphones than any other single brand in applications as diverse as live entertainment, radio and TV, hotel and auditorium sound reinforcement, churches and temples, Congress, legislatures and the White House, and public safety—anywhere that sound excellence is a prime consideration. They are the reliable, professional connection between you and the people you're trying to reach. Send for complete literature. Please let us know your microphone application.

The Sound of the Professionals



AUDIO ENGINEERS P/L
342 Kent Street
SYDNEY 2000 N.S.W.

AUDIO ENGINEERS (Vic.)
2A Hill Street
THORNBURY 3071 Vic

AUDIO ENGINEERS (Qld.)
51A Castlemaine Street
MILTON 4064 Qld

ATHOL M. HILL P/L
33 Wittenoom Street
EAST PERTH 6000 W.A.

NOMIS ELECTRONICS P/L
689 South Road
BLACK FOREST 5035 S.A.

WHY YOU ARE GOING TO ENJOY LISTENING TO OUR LOUDSPEAKERS.



Up to now, if you wanted a terrific pair of loudspeakers you had to hassle with wasted Saturday mornings and Thursday nights listening to a myriad of salesmen when you should have been listening to the loudspeakers they were standing in front of. Did they have something to hide?

Hassle no more. Because we have developed a pair of loudspeakers with enough unique features to place them far beyond **brand X, Y and Z**. And place you beside your phone ringing Chadwick to find out where you can get a pair.

To build the pair, we began with two terrific 245 Etone 300mm bass drivers, which we made even better with a unique modification.

Then we added two Audax 160mm full range Bextrene cone drivers, which we loaded in a transmission line enclosure, vented at the rear.

Next we added two Audax 25mm domes and two 50mm aluminium cone super tweeters.

Finally we linked them all together with a crossover especially designed for this particular configuration.

The sound that emerged from the completed pair was amazing. Just what you would expect from Chadwick.


But being the perfectionists that we are, we further added mirror matched baffles for very tight stereo imaging.

We called the pair "**Executive Monitor**". Even the name sounds impressive.

If you can't afford the "Executive Monitor" (\$990 a pair), we have two other "Executive" models that have also been meticulously developed and engineered "Executive 12" (\$499 a pair) and "Executive 10" (\$449 a pair).

If you have already listened to Brand X, Y and Z, when you listen to a Chadwick loudspeaker pair you will wonder why it wasn't your first choice.

For more information phone Chadwick today on (02) 647 1103.




GM + ASSOC/ETI/12/80

Chadwick Audio Furnishings Pty. Ltd

\$225.00

- Low Noise
- 4 Stereo Program Inputs
- 2 Microphone Inputs
- 5 Channel Stereo Equaliser
- Full Cueing Facility

STUDIO DISCO MIXER

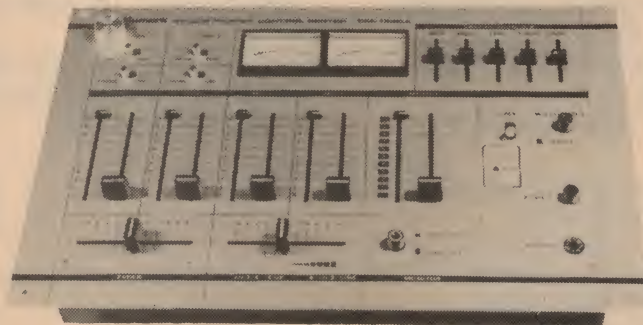

SPECIFICATIONS

Input Sensitivity	MIC	0.5mV
	PHONO	3mV
	LINE	150mV
Input Impedance	MIC	10K ohms
	PHONO	50K ohms
	LINE	50K ohms
Maximum Input Level	MIC	45mV
	PHONO	140mV
	LINE	35V
Rated Output	AMP	1V
	REC	1V
Output Impedance		100 ohms
Harmonic Distortion		At Rated Output 0.2%
		At 6V Output 0.3%

Hum And Noise	MIC	-52dB
	PHONO	-62dB
	LINE	-65dB
Frequency Response	MIC	30 to 16000Hz (-1dB)
	PHONO	30 to 20000Hz (RIAA ±2dB)
	LINE	20 to 30000Hz (-1dB)
Equaliser Section		
Control Frequencies		60Hz, 250Hz, 1kHz, 3.5kHz, 12kHz
Control Range		±12dB, Boost or Cut
Control Type		Slide Centre Detent for "Flat" setting
Headphone Output (CUE)		50mW at 75 ohms at 0.5% THD
Talk Switch		14dB at Phono or Line at TALK Position
Power Consumption		AC 240V 50/60Hz 8 Watts
Dimensions		15 3/4" (W) x 3 7/8" (H) x 10.2" (D)
Shipping Weight		9.3lb

Distributed by



Freedman Electronics PTY. LTD.
89-91A LIVERPOOL ROAD, SUMMER HILL, NSW 2130


* Trade Enquiries Welcome

MANUFACTURERS • IMPORTERS • WHOLESALEERS
SALES AND SERVICE TO ALL SOUND EQUIPMENT
TELEPHONE (02) 797 9941, 797 0986

ENTER THE 80's NOW WITH

UNI-BOARD

THE "UNIVERSAL" CIRCUIT BOARD

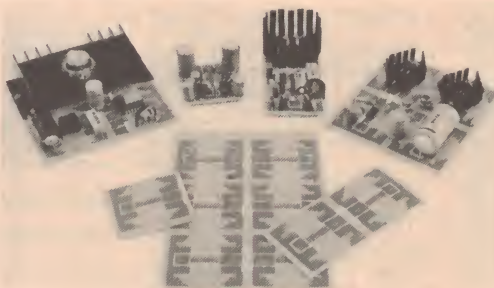

BUILD ALMOST ANY CIRCUIT

- AMPLIFIERS
- REGULATED POWER SUPPLIES
- LINEAR IC CIRCUITS
- DIGITAL IC CIRCUITS
- PRE-AMPS, TONE CONTROLS
- STANDARD 6 PACK UNI-BOARD (41" x 6 1/2") HAS SOME 2,800 HOLES SO IT CAN EASILY ACCOMMODATE EVEN 40 PIN IC's
- MANY, MANY MORE!

ECONOMY PLUS!

UNIBOARD WILL SAVE YOU MONEY.

- NO WASTE — SURPLUS BOARD CAN BE USED ON ANOTHER PROJECT
- USE AGAIN & AGAIN
- LOW COST "BREAD BOARDING"
- PROTOTYPE LAYOUTS CAN ALSO BE USED FOR YOUR "UNI-BOARD" PRODUCTION RUN
- BOARD EASILY CUT OR TRIMMED TO SUIT THE SIZE OF YOUR PROJECT.

PRICE LIST

UNI-BOARD SINGLE MODULE PACK (STANDARD GRADE)	\$2.20
UNI-BOARD SINGLE MODULE PACK (PROFESSIONAL GRADE — F/GLASS)	\$2.60
UNI-BOARD TWIN PACK (STANDARD GRADE)	\$3.20
UNI-BOARD TWIN PACK (PROFESSIONAL GRADE — F/GLASS)	\$3.80
UNI-BOARD SIX PACK (STANDARD GRADE)	\$7.97
UNI-BOARD SIX PACK (PROFESSIONAL GRADE — F/GLASS)	\$9.90

TO: ADVANCED ELECTRONIC SYSTEMS PTY LTD
3 STANILAND GROVE, ELSTERNWICK 3185

PLEASE SUPPLY UNI-BOARDS AT \$.....EA.
I ALSO ENCLOSE 70c P&P.

NAME

ADDRESS

POSTCODE

BAD T.V. RECEPTION

IMPROVE YOUR PICTURES BY FITTING AN AMPLIFIER, PLUS A GOOD QUALITY CABLE.

SUCH AS:

ECRAFT Double Screened Coaxial cable
2045 3.5 dB loss at 216 Mhz per: 30 M 47c per metre.

2063 2.05 loss at 216 Mhz per: 30 M 1.08 per metre.
Open-wire feeder 1.5 dB loss*at 200 Mhz per 30 M 70c per metre.

MAST HEAD AMPLIFIERS

HILLS	Input	Output	Gain	Ratio
Mh.1	300	300	10 dB	3.1
Mh.2	300/75	75	20 dB	10.1
Mh.4	300/75	300/75	25 dB	17.1

MH.4/10 or 20dB down on Ch's 3-4-5A

KINGRAY

MH20	300	75	20 dB	10.1
MH20WN	300	75	20 dB	10.1

LABGEAR


6060	75	75	28 dB	25.1
6059	75	75		

approx. 15 dB down on Ch's 0-6

ECRAFT Line Amplifiers VHF-UHF

Type	Outlets	Gain per Outlet
175D16	1	16 dB
275D12	2	12 dB
375D10	3	10 dB
475D10	4	10 dB
175D25	1	25 dB
275D21	2	21 dB
375D19	3	19 dB
475D19	4	19 dB

These Amplifiers are suitable for installation of extra points in your home. Please phone for prices.

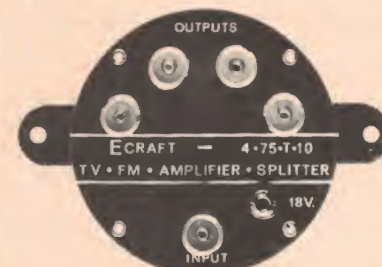

ELECTROCRAFT PTY LTD

68 Whiting Street, Artarmon NSW
Telephone 438-4308 ext. 6
or 438-3266 ext. 6.

WE ARE SPECIALISTS
30 years in the antenna business.
Hours: 8am to 5pm

Prices subject to alteration without notice.

SANSUI DRAMATIZES ITS TECHNOLOGICAL LEADERSHIP AGAIN!



The superb sound quality of the top-of-the-line SUPER COMPO System will impress the most dedicated audiophile. And the unique visual displays combined with easy operation create new pleasures for music lovers. Only Sansui's finely honed advanced technology offers such multi-dimensional benefits.


Take a good look at the C-77 control center preamplifier with its built-in auto/manual fader. The colorful display shows you how smoothly one sound source is fading out while another is coming in. The fact is this is the first time in audio history that such a function has been offered in a quality stereo system.

Now look at the "Linear A" DC-Servo power amplifier. You'll see a large spectrum analyzer display and detailed peak

power display. But what you can't see is the Linear A design which eliminates switching distortion for exceptional pure sound you will clearly hear. Combined with DC-Servo circuitry, the B-77 outperforms any other amplifier in its class.

Look at other audio systems and now examine the front of the T-77 Digital Quartz PLL Synthesizer tuner. It allows you to "program in" eight of your favorite AM or FM stations for instant pushbutton recall. In addition, an auto search feature scans either up or down the band until it locks on a good quality station.

The more you look, the more you listen, the more will the tangible advantages of Sansui's special technology impress you and your listeners. Superior musical quality is what SUPER COMPO is all about.



Marantz ST500 computer stereo tuner

Louis Challis found this tuner delightfully convenient to operate and praises its "faultless quality of reception".



LARGE SCALE integration, generally in the form of the microprocessor, means that today's electronic equipment can be provided with features that not so long ago were only wild and impractical ideas in the minds of designers. The sophisticated tuning, preset and display features of the Marantz Computer Stereo Tuner are examples of the kind of elaboration that is now feasible.

Design


The external appearance of this tuner is remarkably neat, with black lettering anodised into the brushed satin aluminium escutcheon. The panel is divided into three sections. At the left is a five digit frequency display with green gas plasma digits. In the top left hand corner the words "FM Stereo" are displayed when the signal strength is sufficient and below this is an "ME" display which indicates when the memory is active and the station is stored.

To the right of the digital display is a signal strength and multipath indicator with five rectangular light emitting diodes. These are clear and effective in their operation and normally indicate relative signal strength on both AM and FM. When the multipath switch is depressed, this five-LED array provides (in the FM mode only) an indication of the extent to which there are multipath reflections present on the received signal. These reflections, which occur when radio waves from the transmitter bounce off mountains and tall buildings, arrive at the receiver slightly out of phase with the direct signal and are responsible for much of the sibilance and distortion which characterise poor FM reception. In the owner's manual which accompanies the tuner, Marantz give advice on installing directional antennas to minimise multipath problems.

Immediately below the signal strength and multipath indicators are seven small LEDs which indicate that a

preset station has been selected and is actually recorded in the microprocessor's memory. The centre of the escutcheon contains seven rectangular switches numbered 1 to 7 and a "memory" switch. To enter a station frequency in the memory, you tune to that station and press the "memory" switch followed by one of the numbered switches. Many receivers contain batteries to maintain this kind of memory function, but Marantz have designed in storage capacitors to supply power to retain the data for up to ten days. Obviously if you go away for more than ten days you have to rewrite the memory.

To the right of the preset controls are four selector buttons for FM/AM, wide or narrow band on the FM, multipath indication and stereo/mono. The wide/narrow band facility enables the FM bandwidth and frequency response to be narrowed and cut off more steeply to minimise adjacent channel interference where this occurs. In Australia this is not a problem on FM as we do not have

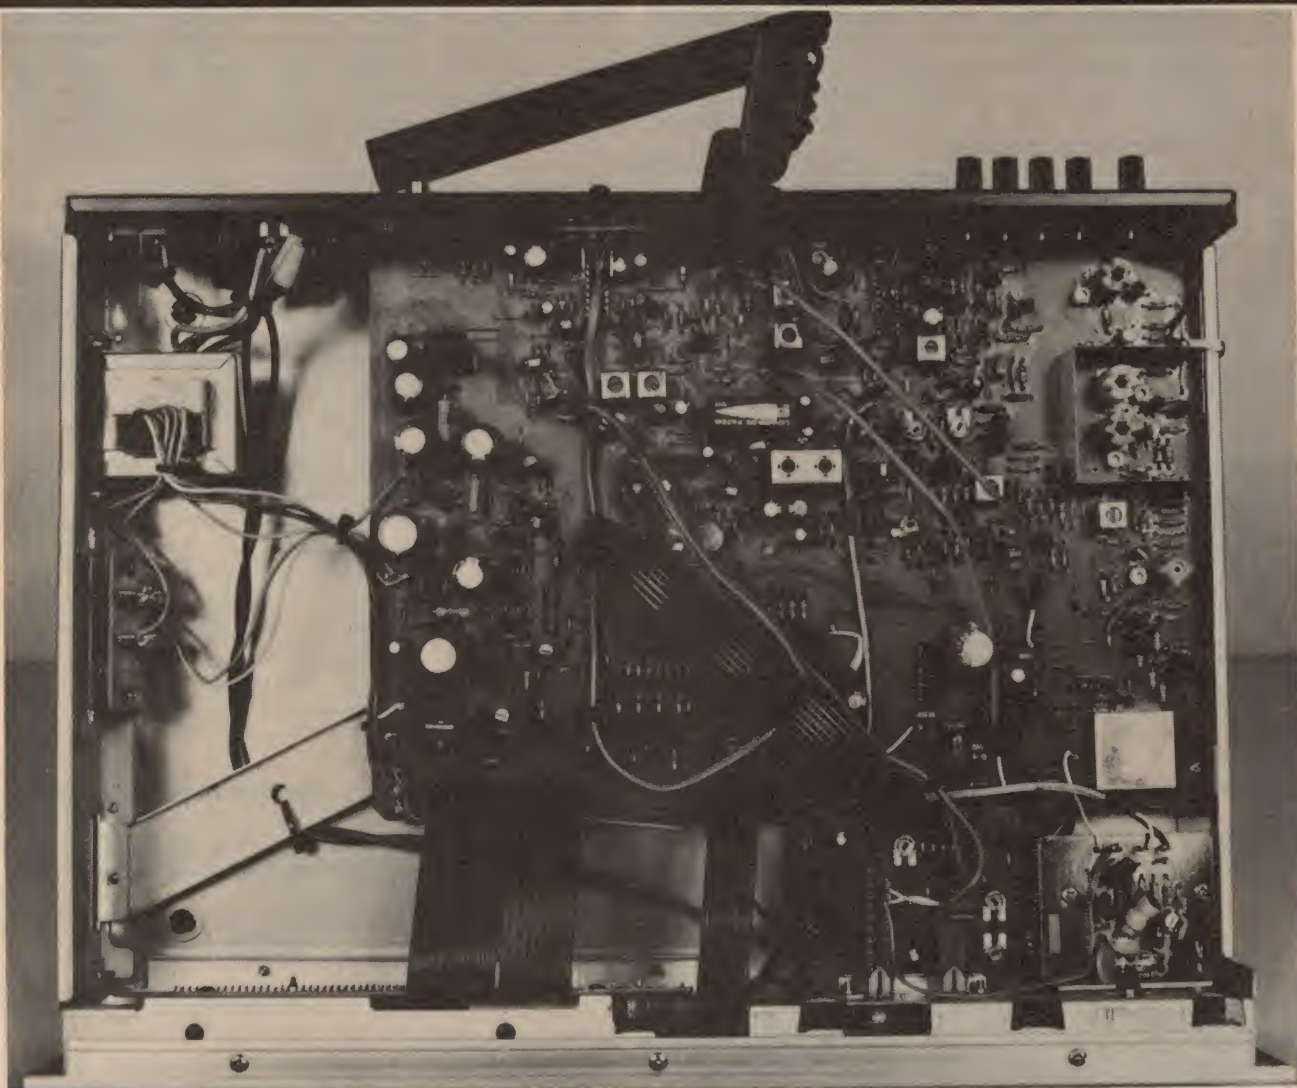

the same station density as Japan and America, but it is a pity that the makers did not provide this facility with the AM tuner as well.

On the extreme right of the escutcheon is a wide switch bar for tuning and scanning. Pressing the right hand side of this bar causes the tuner to scan upwards automatically; pressing on the left makes it scan downwards in frequency. It can be set to scan continuously or to lock onto the nearest station with sufficient signal strength. If it approaches the end of the band without finding a station it switches to the other end of the band and continues the search.

The cabinet is made of neatly pressed and folded steel, finished with a black matt plastic coating. The tuner would be equally at home mounted in a rack or

stacked on top of other equipment on a shelf.

At the rear of the receiver are five terminals for 75 ohm and 300 ohm aerial cable termination, a ground connection and an AM antenna connection. The centre of the panel is fitted with a neat plastic encapsulated universal AM loopstick antenna which is attractive and effective, and a scan step control with increments of 9 kHz or 10 kHz for AM and 50 kHz or 200 kHz for FM. The unit supplied to us was adjusted for 9 kHz and 50 kHz steps to suit Australian conditions. Also at the rear are a pair of coaxial sockets for left and right channel outputs, a mains voltage selector and an unusual mains socket which accepts the two-pin plug moulded onto the mains lead.

The inside of the unit is every bit as

neat as the outside and features one large printed circuit mother board, neatly labelled with component numbers and stencilled on top with the track lying underneath. Four minor boards immediately behind the front panel contain the frequency indication, selector switch connections and the tuning search control. All these boards are connected to the mother board in a neat and professional manner.

The mains power transformer and fuses are separately located on the side of the chassis, but the rest of the power supply and all the other components are on the main board. The connections to the input and output sockets are all made directly onto the board and the general impression is of a unit designed for the minimum number of wiring connections. ►

Project 1500

from page 49

range and switch the *mode selector* to *VLF*. Hold the search head up in the air and well away from metal objects, press the *tune memory* button and rotate the *tune* control. The meter should swing either side of the centre position. Set the pointer to centre scale and release the tune button. The meter should remain at this position but may drift slightly, which it will tend to do immediately after switch on. Pressing the *tune memory* button at any time should return the meter to centre position, set by the *tune* control.

The next step is to determine that the polarity of the receive coil is correct. After tuning the detector as described, bring a piece of iron near the search head. If the meter swings to the right your circuit is correct, if it swings to the left you will have to reverse the two wires on the DIN socket that connect to the receiver section on the pc board. The meter should now swing to the right.

Ground balance

With the detector tuned, lower the search head to the ground. The meter may swing off scale. If it swings to the right turn the *ground* control to the left, if it swings to the left turn the *ground* control to the right. Raise the search head from the ground, press the tune

button and the meter will return to centre scale. Lower the search head again and repeat the procedure until there is little difference in the meter reading when the search head is lowered. Setting the ground control is quite critical and may take some time to achieve the first time around. The detector can now be used in the VLF mode.

Sensitivity control

The *sensitivity* control sets the gain of the dc amplifiers in the detector and will generally give best results at mid-range. If the control is set fully clockwise the tuning will tend to drift, requiring more frequent operation of the *tune memory* button.

Discriminate controls

The mode switch selects one of three discriminate ranges: TR1, TR2 or TR3, while a vernier action is provided by the *discriminate* control. The discrimination ability of this circuit is extremely effective and it is possible to discriminate between an aluminium ring pull tab and a gold ring. Remember that discrimination depends on the resistivity of the target object.

When set to TR1, *discriminate* control at mid-range, the meter should show 'bad' for ferrous objects and 'good'

for non-ferrous objects along with a tone from the speaker. As the discrimination controls are advanced, some non-ferrous objects such as brass will start to give a 'bad' reading, while gold and silver will give a 'good' reading. As the controls are advanced further aluminium will start to give a 'bad' reading, and so on. As you use the detector you will become familiar with its operation.

The best way of setting the discrimination controls is to carry around a few sample objects of the type you want to discriminate against just for this purpose. One thing to remember is that a corroded object will require a different setting of the controls to a non-corroded one so carry samples typical of what you are likely to dig up.

By careful setting of the controls, unwanted objects can be tuned out, giving no meter movement at all so the detector can be used to reject particular objects and at the same time discriminate between others.

Well, it's now up to you. Remember, the secret of success in metal detecting is more knowing where to look than the type of detector you have. There are many books available on the subject which could help put you on the right track.

Danish design. Peerless precision.



Loudspeakers from Peerless make your present system sound like new.

Not only will the new precision-built Peerless PAS series improve the sound from your present system, but the beautiful Danish designed natural wood-veneer cabinets complement any interior.

Now you can enjoy tight clean bass responses, with accurate mid-range and crisply defined treble notes.

The new mini Peerless models PAS 20 and 30 are designed for shelf use (upright or horizontally) while models PAS 40, 50 and 80 are floor standing speaker systems. All models handle up to 100 watts RMS inputs.

Contact us now and discover where you can hear Peerless loudspeakers — then let your ears make up your mind.

G.R.D. GROUP Pty. Ltd.

698 Burke Rd. Camberwell, Victoria 3124
Telephone: (03) 82 1256 Telex 31712



P1380

Please send me literature and dealer list on the PAS Loudspeakers.

NAME _____

ADDRESS _____

POSTCODE _____

You spent thousands of dollars getting hi-fi. Keep it that way for a few dollars more.

To maintain the best performance from your cassette, reel to reel recorders and decks, video tape recorders and record playing equipment use Philips Maintenance Products.

Philips manufacture a very large range of maintenance aids to assist you to keep your valuable equipment in good order.

All these and many more products are available from your Philips Service Centre or dealer outlets.



Drop In Cleaning Cassette

Philips Drop In Cleaning Cassette is a complete kit for cleaning, tape head guides and capstan. **\$4.20***
Code 38920015

Philips RC3000

Hi Fi Record and Stylus Cleaner. Length pivot to pad 200 mm, arm overhang 35 mm. Complete with 2 pads, stylus brush, cleaning fluid. **\$25.46***
Code 39590159

Other popular Philips Service Products.



Philips Disco Combi Set
Gets down deep into the recorded grooves with a long lasting velvet pile, complete with special cleaning fluid. **\$3.89**
Code 39590157

Philips Hi Fi Stereo Headphones


Hi Fi Stereo Headphones with twelve extra membranes for spatial sound. **\$96.00***

Technical Data (Subject to modification without notice)
Frequency response 16-20000 HZ (± 3.5 DB); Impedance (nominal) 2 x 600 ohm; Sensitivity 94 DB S.P.L. at 1 MW; Nominal power input 2 x 1 MW; Maximal power input 2 x 200 MW; Distortion $< 1\%$; Weight 390 g approx.
Code 242 47017



Philips V.C.R. Cleaning Cassette

Maintains highest quality of picture and sound, removes deposits from video, audio heads and tape guides. Use every 30 hours for maximum results. **\$19.20*** Code 39590102



Head Renovator Cassette

All recorders eventually lose performance through their heads becoming gradually magnetized. Thanks to the new SBC 137 you can effectively clean and demagnetize recorder heads all in one easy operation. **\$4.85***

Code 39590165
*Recommended retail price

All Philips audio and video service products are available through your nearest Philips Service Centre or selected dealers.

Sydney: 443 Concord Road, Rhodes, N.S.W. 2138. Telephone: (02) 73 0231. **Philips Building,** 2 Blue Street, North Sydney, 2060. Telephone: (02) 922 0181.
Newcastle: 190 Parry Street, Newcastle West, 2302. Telephone: (049) 61 1631. **Canberra:** 86 Wentworth Avenue, Kingston, A.C.T. Telephone: (062) 95 0321.
Melbourne: Cnr. Miles & Dodds Street, South Melbourne, 3205. Telephone: (03) 699 2711. **Hobart:** 2A Pierce Street, Moonah, Tasmania, 7009. Telephone: (002) 28 0121. **Brisbane:** 55 Forbes Street, West End, Brisbane, 4101. Telephone: (07) 44 8121. **Townsville:** 38 Punari Street, Currajong, 4812. Telephone: (077) 79 7422. **Adelaide:** 81-97 Flinders Street, Adelaide, 5000. Telephone: (08) 223 2999. **Perth:** 875 Wellington Street, West Perth, 6005. Telephone: (09) 321 5131.

PHILIPS

ServiceServiceService



AHEARN PSI

In the lab

The objective testing of this unit was unusual in that the first parameter that most people are interested in, the usable sensitivity, was a little complicated to evaluate. In the stereo mode the inbuilt muting, which cannot be disconnected, makes it impossible to measure the sensitivity in the normal manner. At 26 microvolts into 75 ohms the receiver mutes and that's it! In the mono mode things are a little better. A signal to noise ratio of 26 dB (commonly regarded as the lower limit of acceptability) occurs at 1.3 microvolts input, which is slightly higher than the maker's specification but nevertheless a good performance.

A plot of the signal to noise ratio against input signal power is shown on this page. Performance on mono is particularly good — for signals above the 68 dB level the S/N ratio is 68 dB. When the stereo muting takes place the S/N ratio is still 58 dB so it is apparent that the designers intend that you should receive premium quality reception in the stereo mode and revert to mono where less adequate signals are received. The surprising thing about

this receiver is that the unweighted signal to noise ratios in the stereo mode are superior to those in the mono mode, being 70 dB for narrow band stereo and 65 dB in mono.

The FM frequency response extends from 24 Hz to 16 kHz but it is not the smoothest we have ever seen. However, the channel separation is particularly good, exceeding 35 dB from 40 Hz to 2 kHz. Image rejection, IF rejection, channel balance and subcarrier rejection are all excellent.

By contrast the AM tuner has only a mediocre sensitivity of 25 microvolts for 26 dB signal to noise ratio with 30% modulation. This is suitable for local reception only and has been designed for that purpose. The AM bandwidth, in the usual Japanese fashion, is 50 Hz to 3.2 kHz — only slightly better than the norm.

Subjectively

Subjective evaluation of this tuner was a real delight. Of all the tuners I have ever used this is without doubt one of the easiest and most pleasant to operate. The computuner circuitry has been very well conceived and in con-

junction with the automatic tune and search facility produces the sort of results and convenience I believe most listeners really want.

The quality of reception is faultless. Especially noteworthy is the freedom from distortion on both the FM stereo and mono reception. Distortion is less than 0.25% under any operating conditions and that is a remarkably good performance.

The Marantz ST500 is not the cheapest or the most expensive tuner on the market; it is not the biggest or the smallest. It is, however, one of the nicest and easiest to use and frankly I liked it. ●

MARANTZ STEREO COMPUTER TUNER MODEL ST500


Dimensions: 416 mm wide x 73 mm high x 300 mm deep

Weight: 4 kg Price: \$399

Manufactured by: Marantz in Japan

Absolute copyright in this review and accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.

Louis A. Challis
& Associates Pty Ltd. dB

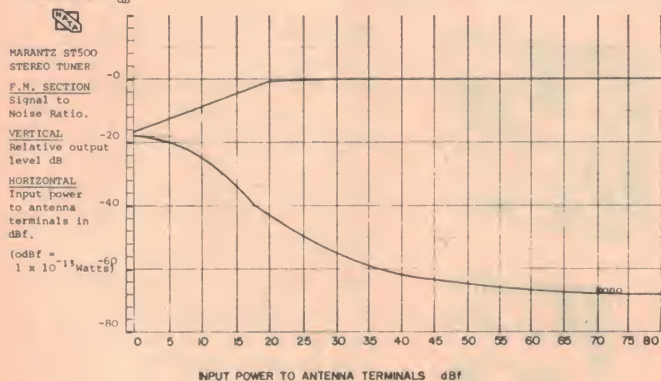


LC

MEASURED PERFORMANCE OF


MARANTZ ST500 STEREO TUNER SN 03A020048

USABLE SENSITIVITY:	With 40kHz deviation at 98MHz into 75 ohms Mono signal to noise ratio 26dB (narrow) 1.3 μ V Stereo signal to noise ratio 58dB (narrow) 25 μ V
SIGNAL TO NOISE RATIO:	With 50kHz deviation at 98MHz into 75 ohms Unweighted mono in the narrow mode 65dB Unweighted stereo in narrow mode 70dB
CHANNEL SEPARATION:	Better than 35dB from 40Hz to 2kHz
FREQUENCY RESPONSE:	FM 24Hz to 15kHz AM 50Hz to 3.2kHz
CHANNEL BALANCE:	Better than 0.2dB
OUTPUT VOLTAGE:	At 1kHz - 1.45 volts
OUTPUT IMPEDANCE:	At 1kHz - 600 ohms
OVERALL SENSITIVITY	
PERFORMANCE:	See graph

Louis A. Challis
& Associates Pty Ltd. dB

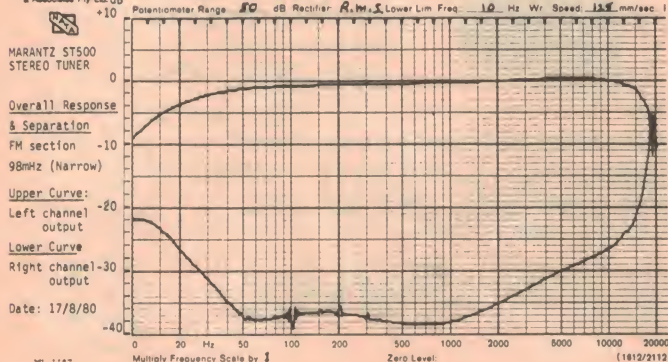

Louis A. Challis
& Associates Pty Ltd. dB

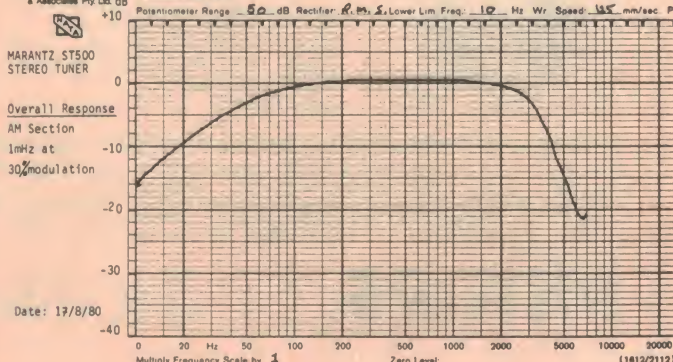

NOT ALL OF THE BEST SPEAKERS ARE IN POLITICS.

But many of them depend on our speakers to make themselves heard. Because we're specialists in the manufacture of loudspeakers for just about any application — P.A. systems, car stereo, hi-fidelity, radio, TV and communications.

Whatever your loudspeaker requirements are the specialists at Magnavox can help.

Just send in the attached coupon for details of our complete range or contact your nearest Magnavox distributor.

Qld. R.A. Venn Pty. Ltd. 67 Doggett Street, Fortitude Valley Qld. 4006
Ph: 525421. N.S.W. Standard Components Pty. Ltd. 10 Hill Street, Leichhardt
N.S.W. 2040 Ph: 6606066. VIC TV Tuner Service Pty. Ltd. 469 St. Georges
Road, Thornbury Vic. 3071 Ph: 446179. S.A. Gladiola Company 11 Laurel
Avenue, Linden Park S.A. 5065 Ph: 513700. Protronics Pty. Ltd. 180 Wright
Street, Adelaide S.A. 5000 Ph: 2123111. W.A. Everett International Pty. Ltd.
17 Northwood Street, West Leederville
W.A. 6007 Ph: 3815500.

MAGNAVOX

Australia Pty. Ltd.



To: Magnavox Australia Pty. Ltd. PO Box M345. Sydney Mail Exchange. N.S.W. 2012.
Please send me information on Magnavox ☐ High fidelity range ☐ General purpose range.


Name _____

Address _____

Postcode _____

TNT
COURIER

AUSTRALIA WIDE SATCHEL.

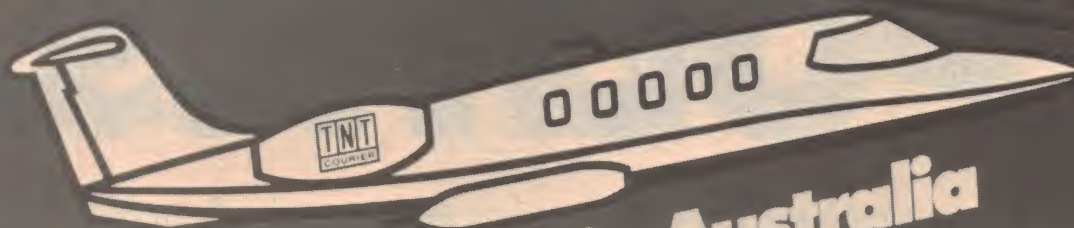

***anywhere in Australia
overnight.**

**Anything which fits inside this satchel may be sent almost anywhere in Australia, overnight.*



Now your newsagent can solve your urgent parcel problems.

This TNT Courier Overnight Satchel has just turned your friendly newsagent into an air freight depot. For \$8.75 you can send anything that fits inside to almost anywhere in Australia. Overnight. You don't have to wrap a thing. The bag is tough, waterproof and tear resistant.

You can buy TNT Satchels at most newsagents throughout Australia. (At present in N.S.W., they are

available only in Sydney, Newcastle, Wollongong, Gosford and A.C.T.). Just address the satchel and leave it with your newsagent. TNT Courier collect it, air freight it overnight and deliver the next morning.

The TNT Courier Suburban Satchel is for overnight local deliveries in all mainland capitals (and soon Hobart) for just \$5.00.

TNT Courier Overnight Satchels. *Anything, anywhere, overnight.

A Speedy Communications product. *Anything which fits inside the satchel may be sent almost anywhere in Australia, overnight.

TNT
COURIER



Conventional
loudspeakers.



Bose
Direct/Reflecting
loudspeakers.

Is your music still in the box?

You took your loudspeakers out of their cartons, but you may have left your music in a box.

Conventional loudspeakers project sound only from the front of the speaker cabinet. So you hear music coming from a very small area. Boxed in. Confined.

Direct/Reflecting loudspeakers radiate *reflected* as well as direct sound, like live music. You hear music coming from a wide area behind and to the sides, as well as from the front of the loudspeakers.

Direct/Reflecting loudspeakers release the spacious feeling of live music from your recordings. It's like sitting in front of a stage instead of a box.



Direct/Reflecting[®]
Loudspeakers are
made only by...

BOSE[®]
Better sound through research.

Covered by patent rights issued and pending.

Australasian Distributors: Bose Australia, 11 Muriel Avenue,
Rydalmere 2116, Sydney, NSW. Phone 684-1022.

IT'S EITHER FLOOD OR FAMINE!
 Demand for these books has been overwhelming and our initial stocks of some titles ran out earlier than expected. Subsequent supplies were delayed and delivery of books on back order has been delayed as a result. Our apologies. We have arranged to air freight additional supplies and we expect few delays in future. Christmas mail delays may influence delivery this month.

& Electronics Books

ARNARD BABANI (publishing) LTD

160: COIL DESIGN & CONSTRUCTION MANUAL B.B. Babani

- Complete book on how to design and make RF, IF, audio and power coils, chokes and transformers. Every type is discussed and calculations given. Covers AM and FM radio and TV.

96 pages

Price \$2.75

202: HANDBOOK OF ICs EQUIVALENTS AND SUBSTITUTES. B.B. Babani

- One of the most complete IC equivalent and substitute guides yet published. Full data on over 9500 ICs. Covers digital and linear of all types from UK, USA, Japan, Germany, France, Czechoslovakia etc.

128 pages

Price \$3.70

221: 28 TESTED TRANSISTOR PROJECTS R. Torrens

- Some circuits are completely new — others are more familiar designs. The projects can be split into simple building blocks to enable readers to combine circuits for specialised needs.

96 pages

Price \$4.60

224: 50 CMOS IC PROJECTS R.A. Penfold

- CMOS ICs are suitable for an extraordinarily wide range of applications, are cheap and easy to obtain. Here are a number of interesting and useful projects in four general categories: (1) Multivibrators, (2) Amplifiers and oscillators, (3) Trigger devices, (4) Special devices.

112 pages

Price \$3.50

225: PRACTICAL INTRO TO DIGITAL ICs D.W. Easterling

- This book introduces the reader to digital ICs (mainly TTL 7400 series). Besides a number of simple projects, contents include details of a Logic Test Set which enables constructors to identify and test digital ICs. Also includes digital counter-timer.

80 pages

Price \$4.60

227: BEGINNERS GUIDE TO BUILDING ELECTRONIC PROJECTS R.A. Penfold

- Enables total beginners to tackle practical electronic so he or she can confidently build electronics projects such as published in ETI and other magazines and books. Subjects include component identification, tools, soldering, various building methods, cases, legends etc. Practical basic projects are also included.

112 pages

Price \$4.60

BP1: 1ST BOOK OF TRANSISTOR EQUIVALENTS AND SUBSTITUTES B.B. Babani

- Complete transistor equivalents guide. More than 25 000 transistors with alternatives and equivalents. Covers devices made in UK, USA, Japan, Germany, France, Europe, Hong Kong etc. See also BP 14 (below).

80 pages

Price \$2.25

BP 14: 2ND BOOK OF TRANSISTOR EQUIVALENTS AND SUBSTITUTES B.B. Babani

- The second book contains data on devices not included in the first. This book supplements BP1, no data is duplicated.

208 pages

Price \$4.05

BP 24: 52 PROJECTS USING IC 741 Rudi & Uwe Redmer

- Originally published in German, this book achieved huge European sales. Now translated into English with copious notes, data and circuits, this book is a must for those interested in any way in this inexpensive and most versatile IC.

80 pages

Price \$3.50

BP 33: ELECTRONIC CALCULATOR USERS HANDBOOK M.H. Babani

- An invaluable book for all calculator users. Presents formulae, data, methods of calculation, conversion factors etc, often with examples. Includes way to use simple four-function calculator for Trig functions (sin, cos, tan); Hyperbolic functions (sinh, cosh, tanh), Logs, Square Roots & Powers.

Comprehensive conversion factors incorporated, including length, area, volume & weight through specialised conversions such as viscosity, illumination, cargo shipping measures etc. Also formulae for discounts and mark-up, currency conversions, interest, solutions of equations, binary and octal numbers, areas and volumes, stats and maths etc.

208 pages

Price \$3.50

BP 36: 50 CIRCUITS USING GERMANIUM, SILICON, ZENER DIODES R.N. Soar

- Contains 50 interesting and useful circuits and applications in many different branches of electronics.

64 pages

Price \$2.75

BP 37: 50 PROJECTS USING RELAYS, SCRs & TRIACS F.G. Rayer

- Relays, SCRs and Triacs have a wide range of applications — from motor speed control, dimming, heating, timers, light-sensitive circuits, warning devices, light modulators, priority indicators, circuit breakers etc. Book gives tried and proven circuits which will tolerate wide latitude of components and values allowing easy modification to suit special needs.

112 Pages

Price \$4.60

BP 39: 50 (FET) FIELD EFFECT TRANSISTOR PROJECTS F.G. Rayer

- Field effect transistors are used in many circuits. The projects here include amplifiers and converters, test equipment and receiver aids, tuners, receivers, mixers and tone controls, plus miscellaneous devices. The FET used is not critical and many other types will work as well. This book will be of interest to all enthusiasts, shortwave listener, radio amateur, hi-fi buff or general electronics experimenter.

112 pages




Price \$4.60

BP 40: DIGITAL ICs AND PIN CONNECTIONS Adrian Michaels

- Equivalents and pin connections of a popular user-orientated selection of digital ICs. Shows details of packaging, families, functions, manufacturer and country of origin. Includes devices by Fairchild, Ferranti, Harris, ITT, Motorola, National, Philips, RCA, Signetics, Sescocem, SGS-Ates, Siemens, SSSI, Stewart Warner, AEG-Telefunken, Texas, Teledyne. Companion volume to BP 41 — Linear ICs.

320 pages

Price \$9.00



**BP 41: LINEAR IC EQUIVALENTS
AND PIN CONNECTIONS**
Adrian Michaels

• Essentially similar in concept to above but deals with linear integrated circuits.
320 pages **Price \$10.00**

BP 42: 50 SIMPLE LED CIRCUITS
R.N.Soar

• 50 interesting and useful circuits and applications using LEDs. A useful book for beginner and advanced enthusiast alike.
64 pages **Price \$3.50**

BP 44: IC 555 PROJECTS
E.A.Parr

• Every so often a device is made that is so useful one wonders how life went on before it! The 555 IC is one such. First made by Signetics it is now manufactured by almost everyone in the business. It is very cheap and readily obtainable.
Included in this book are basic and general circuits, motor car and model railway circuits, alarms and noise makers plus a section on the subsequent 556, 558 and 559 devices.
160 pages **Price \$6.45**

**BP 45: PROJECTS IN
OPTO-ELECTRONICS**
R.A.Penfold

• Opto-electronic projects of interest to all electronics enthusiasts. Included are simple circuits using ordinary LEDs as well as more sophisticated designs such as infra-red transmitters and receivers, modulated light transmission and photographic projects.
112 pages **Price \$4.95**

BP 47: MOBILE DISCO HANDBOOK
Colin Carson

• Most people who start mobile discos know little about equipment or what to buy. This book assumes no preliminary knowledge and gives enough info to enable you to have a reasonable understanding of disco gear.
128 pages **Price \$4.95**

**BP 48: ELECTRONIC PROJECTS FOR
BEGINNERS**
F.G.Rayer

• This book gives the newcomer to electronics a wide range of easily built projects. Actual component and wiring layouts aid the beginner. Some of the projects may be built without using soldering techniques.
128 pages **Price \$4.95**

**BP 49: POPULAR ELECTRONIC
PROJECTS**
R.A.Penfold

• A collection of the most popular types of circuits and projects covering radio, audio, household and test equipment.
144 pages **Price \$5.35**

**BP 51: ELECTRONIC MUSIC AND
CREATIVE TAPE RECORDING**
M.K.Berry

• This book shows how electronic music can be made at home with simple and inexpensive equipment. It describes how sounds are created and recorded to build up a final composition. It shows how to build a small studio including mixer and various sound effects units.
96 pages **Price \$4.60**

**BP 53: PRACTICAL ELECTRONIC
CALCULATIONS AND FORMULAE**
F.A.Wilson

• This book is for the practical person's workshop bench. It bridges the gap between technical theory and cut-and-ried methods which may work but leave the experimenter unfulfilled. There's a strong practical bias. Tedious and higher maths has been avoided where possible. Many tables are included. This one's a beauty!
256 pages **Price \$8.25**

**BP 56: ELECTRONIC SECURITY
DEVICES**
R.A.Penfold

• Simple and more sophisticated burglar alarms using light, infra-red and ultrasonics; also other types of alarm such as gas and smoke detectors, flood alarms, doorphone and baby alarms etc.
112 pages **Price \$5.35**

ELEMENTS OF ELECTRONICS
F.A.Wilson

BP 62 — Book 1

BP 63 — Book 2

BP 64 — Book 3

• This series provides an inexpensive intro to modern electronics. Although written for readers with no more than basic arithmetic skills, the use of maths is not avoided — all the maths is taught as the reader progresses.

The course concentrates on the understanding of concepts central to electronics rather than continually digressing over the whole field — on the basis that once the fundamentals are mastered, the workings of most other things are soon revealed. The author anticipates where the difficulties lie and guides the reader through them.

Book 1 . . . All the fundamental theory necessary to a full understanding of simple electronic circuits and main components.

Book 2 . . . Alternating current theory.

Book 3 . . . Semiconductor technology leading to transistors and ICs.

These three books constitute a complete, inexpensive electronics theory course of inestimable value in either hobby or career.

224 pages **Price \$8.25 (each volume)**

BP 65: SINGLE IC PROJECTS
R.A.Penfold

• All projects in this book are simple to build and are based on a single IC. A few projects use one or two transistors in addition. A strip board layout is provided for each project together with special constructional points and setting up info. The five chapters are: Low level audio, Audio power amps, Timers, Op-amps, Miscellaneous circuits.

128 pages **Price \$5.50**

**BP 66: BEGINNERS GUIDE TO
MICROPROCESSORS AND
COMPUTING**
E.F.Scott

• An introduction to basic theory and concepts of binary arithmetic, microprocessor operation and machine language programming. The only prior knowledge assumed is very basic arithmetic and an understanding of indices.

128 pages **Price \$6.45**

BABANI BOOKS — MAIL ORDER, DIRECT FROM ETI !

Please send me:

Book	Qty.	
160	...	BP41
202	...	BP42
221	...	BP44
224	...	BP45
225	...	BP47
227	...	BP48
BP1	...	BP49
BP14	...	BP51
BP24	...	BP53
BP33	...	BP56
BP36	...	BP62
BP37	...	BP63
BP39	...	BP64
BP40	...	BP65
		BP66

Post & handling:

1 - 4 books: **\$1.35**

5 - 10 books: **\$2.70**

11 - 20 books: **\$3.50**

over 20 books: **\$5.00**

I enclose \$ (inc. p & h.)

Name

Address


. postcode

Send to: ETI 'Book Sales', 3rd Floor,
15 Boundary St, Rushcutters Bay NSW 2011.
Please allow 4 - 5 weeks for delivery.

WE REGRET WE CANNOT SUPPLY NEW ZEALAND READERS

**AUSTRALIA'S
MOST POPULAR
AMPLIFIER KIT
OVER 7,000 BUILT!!**

**NEW
IMPROVED
MODEL — NOW
OVER 20% OFF!**

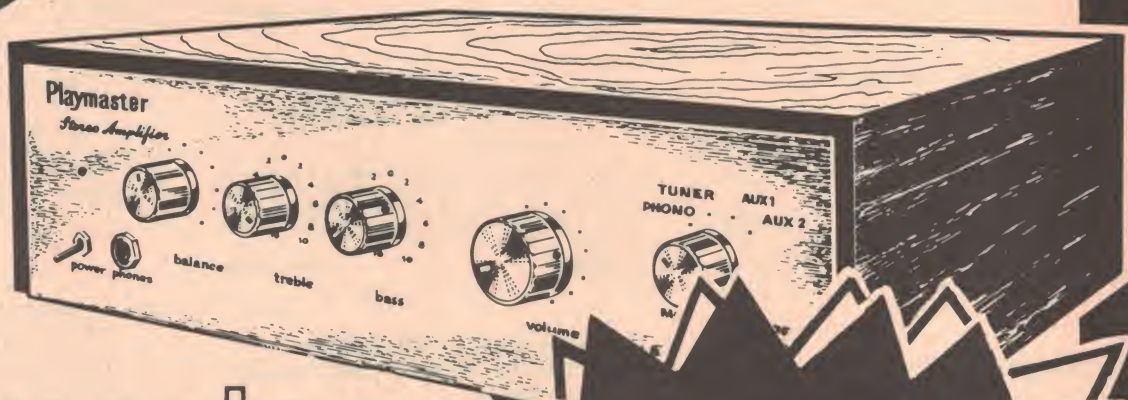

*Timber sleeve shown is optional at extra cost.

Playmaster Universal Stereo Amplifier kits

**NOW WITH
LATEST 'BI-FET'
OP-AMPS!**

Yes! Here's your opportunity to join over 7,000 Australians who have successfully built their own quality stereo amplifier: the Playmaster Twin 25 or Playmaster 40/40.

Now the Playmaster amplifiers have been up-graded to the very latest 'bi-fet' operational amplifier input circuitry for outstanding performance at a realistic price.

And just look at our new low, low price: only \$89.50 for the twin 25, or \$99.50 for the 40/40: a saving of over \$25!

Here's what you get:

- A kit of parts absolutely complete to the last nut and bolt, including the case, pcb, components, — even solder!
- A step-by-step instruction manual which shows you how to build this amplifier even if you've never built anything before!
- Your choice of transformers: the 40/40 has the superb 'C-core' transformer which not only gives high power output, it actually results in a quieter amplifier! (The Twin 25 has a standard transformer).
- Attractive dress panel with matching quality imported knobs to give your amplifier a true professional appearance.
- And our exclusive 'Sorry Dick, it doesn't work' coupon: in the unlikely event that you can't get your amplifier working, you can send it to us. For a small fee, our technicians will correct any wiring errors and get your amplifier working perfectly!

NEW LOW, LOW PRICES

Twin 25

~~\$110.00~~

\$89⁵⁰

NOW ONLY

Forty/Forty

~~\$125.00~~

\$99⁵⁰

NOW ONLY

EXCLUSIVE:

Fibreglass printed circuit board with component positions marked on the top side

You cannot go wrong! Every component position is clearly printed onto the top side of the PCB. All you do is select the component, place it in position and solder: what could be simpler? And the printed circuit board is made of professional quality fibreglass, which means that it is much more tolerant to heat: so even if you've never soldered a circuit board before, the chances of damaging it are pretty small!

EXCLUSIVE:

New BI-FET Operational amplifier input circuitry for lowest noise and optimum signal handling characteristics.

EXCLUSIVE:

Step-by-step instruction manual


Our exclusive instruction manual contains far more than comprehensive step-by-step constructional data: it also shows you how to solder, how to recognise components, how to place them in the printed circuit board... plus trouble-shooting information just in case you run into trouble.

EXCLUSIVE:

***Optional timber sleeve to give your amplifier that "commercially made" look. It looks so good your friends will never believe you built it yourself.**

Timber sleeve: Cat. H-3113 \$8.50

**Even if you've never built anything before
you can build a Playmaster amplifier**

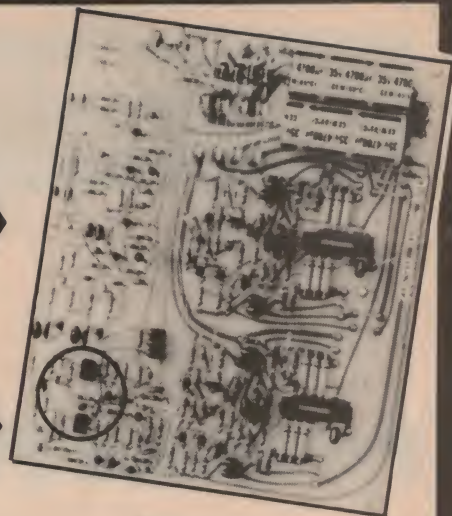

EXCLUSIVE TO DICK SMITH WITH A 7-DAY SATISFACTION GUARANTEE

Not quite convinced you can build your own amplifier? Use our 7-day satisfaction guarantee. Buy the kit, and take it home. Examine it, and the instructions carefully. If you still think it is beyond you, return the kit in original condition (i.e. before construction is commenced) and we'll refund your purchase price in full. What could be fairer than that?

yes!

Please send a new Playmaster Fet-input amplifier kit. I understand that I may examine the kit for seven days. If I'm not completely happy with it or if I think the kit construction is beyond me, I may return it in original condition and packaging and I will receive a full refund of my purchase price.

Please send me

☐

Standard Twin 25 Playmaster amplifier with normal transformer. (\$89.50 pack and post free)

☐

Deluxe Forty Forty Playmaster amplifier with low-noise 'C-core' transformer (\$99.50 pack and post free)

Name: Address:

I enclose (cheque, postal order etc

— do not send cash) for the sum of \$.....

OR Please charge my Bankcard

A/c No:496 Exp. date:

Bankcard Account name:

(Signed)

SEND TO: DICK SMITH MAIL ORDER CENTRE
P.O. Box 321 North Ryde, N.S.W. 2113
OR call into your nearest branch



**SEE OUR OTHER ADS
IN THIS ISSUE FOR
STORES & RE-SELLERS
ADDRESSES**

Peerless PAS 30 speaker system

Locally manufactured enclosures keep the price of these speakers below that of comparable fully-imported systems. Louis Challis tried them out and found them good value.

ONE OF THE questions I am most often asked by friends and associates is, "What loudspeakers should I buy for my new system?" When I reply by asking, "How much do you want to spend?", the most common answer is \$500. Likewise, most retailers will tell you that \$500 seems to be the current 'watershed price' for loudspeakers that separates the serious from the less serious audiophiles.

So when I receive a set of speakers with a recommended retail price of \$498 I tend to sit up and take notice. Are the speakers priced to just pip the intending purchaser's budget or do they have other merits and offer a performance that matches their price?

The Peerless Company of Denmark has always been one of the most respected manufacturers of loudspeakers in Europe. I have used many of their speakers and have found that they offer competitive performance and are usually well designed, with construction apparently based on sound research and good manufacturing techniques. The GRD group of Melbourne

have been able to keep the cost of the PAS 30 speakers in this country down to below the magical \$500 by making the enclosures locally, thereby avoiding most of the freight costs and duty which usually add so much to the price of imported systems.

The manufacturers rate the PAS 30 system as having a 100 watt capability with an eight ohm impedance. They're three way speakers incorporating a 200 mm diameter bass driver with a rolled polyethylene foam surround, a 100 mm diameter midrange driver with a conventional 25 mm diameter voice coil and a 25 mm soft dome tweeter to provide the extended high frequency response.

The enclosure is made out of 18 mm chipboard veneered on the sides and front edges with Australian walnut. The fascia is a black ply panel covered with an open weave artificial fibre and attached to the enclosure by strips of Velcro at the corners and sides.



All the drivers are mounted from the front of the fascia to facilitate construction and repair and the unit

incorporates infill in the form of low density fibreglass to provide internal resonance control and balanced output. In keeping with current thinking about reduction of phase differences, the drivers are aligned vertically with the woofer at the bottom and the tweeter at the top. The back of the cabinet contains two spring-loaded colour coded terminals for the speaker leads. These are set into a recessed circular plastic well on the lower rear face of the unit.

In the lab

Objective testing of these units showed they have a frequency response that extends from 70 Hz to 20 kHz (+/- 6 dB). Hence they match the normal concept of a 'bookshelf' speaker system, which in most cases is expected to have a lower cutoff frequency between 50 and 70 Hz. The frequency response curve is remarkably flat and although there are interactions between the various drivers, whose individual characteristics are not perfect, the resulting response is still particularly good.

The off-axis response is flatter than

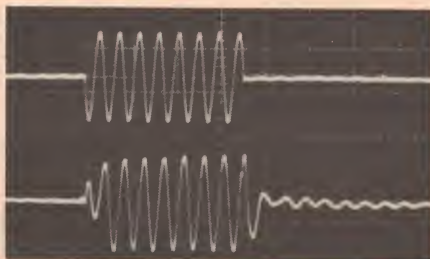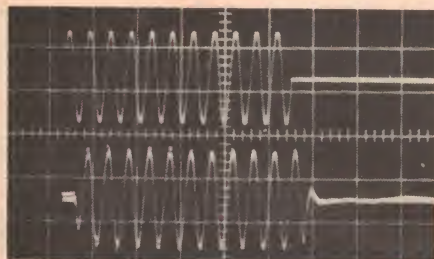

Tone burst response: left, at 100 Hz; centre, at 1 kHz; right, at 6.3 kHz.



the on-axis response and the general frequency response characteristics are above average. The individual responses of the three drivers have been very well selected and the crossover frequencies are well chosen. This is borne out by the phase response of the unit, which is exceptionally flat and shows how effective the design is in reducing phase differences.

The impedance curve shows a sharply rising response at the fundamental resonance of 55 Hz and a ripple whose lowest level is seven ohms. This impedance curve is quite acceptable and would allow these speakers to be paralleled with any other nominal eight ohm speaker system without risk of excessively low impedance.

The distortion characteristics are particularly good. At the 90 dB level at two metres on-axis the total harmonic distortion at the test frequencies of 100 Hz, 1 kHz and 6.3 kHz never exceeds 0.8% — a very satisfactory performance. At higher levels the distortion starts to rise and at sound pressure levels exceeding 100 dB it begins to become unacceptable.

The speakers are moderately efficient, requiring 8.2 watts to achieve 90 dB on-axis, from which it can be seen that the manufacturer's 100 watt rating is fairly realistic. The tone burst response proved to be good, with only a slight trace of ringing being apparent in the 4, 7, 8 and 10 kHz regions. This ringing was not particularly pronounced

and was indicative of an acceptable transient performance.

To the ear

The subjective evaluation of the units gave, in many respects, a better impression than the objective testing. Unlike many of the other speakers we have recently reviewed, the PAS 30 system imposes a remarkably low level of colouration and offers a performance similar to the AR6s, which used to be one of my favourite systems a decade ago. Unlike the AR6s, whose frequency response was still excellent at 50 Hz, the PAS 30s do not perform so well at the bottom end of the register. Fortunately they do not exhibit gross frequency doubling or excessive dis-



Because it's hard enough getting a home together, we've put all this cover together.

Six insurance covers in one.

It's called the AGC Insurance Executive policy for homeowners and householders.

And it saves you dealing with six different insurance companies and worrying about six different policies.

You get one simple policy.

Up to six kinds of cover.

It's a policy that's never been beaten.

Your home itself.

AGC provides insurance cover for your home. Even garages, out buildings and swimming pools.

And we also offer you the New Rebuilding Cover alternative.

These days there is generally a big difference between the current value of your home and what it would cost if you had to rebuild.

AGC's Rebuilding Insurance protects you automatically against inflation. And the increased cost of building materials.

The contents of your home.

We'll cover household goods and personal effects of every description.

No depreciation on goods or articles less than 5 years old. (Excluding linen and clothing.)

Specified personal property anywhere in Australia

We'll also cover the special things you value.

Very valuable objects such as furs, jewellery, paintings and the like.

Other essential protection.

Your AGC Executive policy can also give you cover against Personal Legal Liability

Death of nominated person by accident.

And, if you employ domestic help, workers' compensation (not applicable in Queensland).

With AGC's Executive policy you're not only covered by up to six different types of insurance.

You're covered by a big name – **AGC Insurances.**

Sydney: Phillip & Hunter Streets.

Melbourne: 31 Spring Street.

Brisbane: Tank Street & North Quay.

Adelaide: 10 Pulteney Street.

Perth: 165 Adelaide Terrace.

Hobart: 161 Collins Street, and offices throughout Australia.

AGC (Insurances) Limited. A division of Australian Guarantee Corporation Limited in which the Bank of New South Wales is the major shareholder.

AGC 994 FCB



everyone can learn electronics . . . the effective **Heathkit®** way!

There's never been a better, faster, lower cost way to learn electronics than these Heathkit Programs! Learning electronics could very well be the most important step you'll ever take, so, naturally, there are many factors to consider in choosing your method of learning. If you're like most people, you don't have the time for conventional learning institutions. The Heathkit Continuing Education Series was conceived to make learning electronics more convenient and affordable for everyone. Thousands of people just like you are finding out what makes Heathkit learning programs so tremendously successful. Simple, easy-to-use and EFFECTIVE!

Among the many reasons for the wide acceptance of these programs is their simplicity. Each learning program is simply and logically arranged for easy, step-by-step 'programmed' learning. Progressing at your own established pace, you learn in an unhurried environment free from pressure. No facet of the material is omitted and nothing is assumed. Each program includes everything you need for a high degree of understanding. Audio records (or optional cassettes) reinforce the text material and an optional final examination lets you test your overall comprehension.

The Continuing Education Programs are economical too. The first four programs use the same trainer so you can get a complete education in fundamental electronics at substantial savings. The advanced programs, Digital Techniques and Microprocessors, require separate trainers, but they still cost less than competitive courses.

Get 'Hands-on' experience for a better understanding of electronics. Learning electronics and being able to apply what you've learned are, of course, the goals you seek to achieve with

the Heathkit Continuing Education Series. For that reason, we have spared no effort in assuring your complete comprehension. Our optional Electronic Trainers, designed for use with each program, perfectly illustrate the Heath approach to learning. These trainers give you actual 'hands-on' experience with electronic components and circuitry. It's an acknowledged fact that you learn best by doing and the trainers let you do exactly that. You get a better grasp of circuit concepts and perform the program projects quicker and easier as well. Solderless connectors on the trainer panel make hookup of the components supplied with the program quick and neat. Built-in power supplies and signal sources provide convenient operation. The trainers are available in both kit and assembled form.

When you've finished the program, the trainer still serves as the ideal device for breadboarding circuits of your own design. We highly recommend these trainers as supplements to the Heathkit Individual Learning Programs. A record (or cassette) player is needed to play the audio portion of the material. A VOM for measuring voltages is also needed, and an oscilloscope is required for some of the experiments in the Electronic Circuits and Digital Techniques Programs.

**to find
out more
send for your
FREE CATALOG
today!**

Recommended Order

The Heathkit Self-Instruction Programs are Designed to let you Progress from DC Electronics to AC Electronics to Semiconductor Devices to Electronic Circuits. These are the Four Basic Programs. For Optional Advanced Study, The Digital Techniques Program Provides the Background for the Microprocessor Program.

EE 3101	DC Electronics	\$76.00
EE 3102	AC Electronics	\$84.00
EE 3103	Semiconductors	\$84.00
EE 3104	Electronic Circuits	\$99.00
EE 3201	Digital Techniques	\$125.00
EE 3401	Microprocessor Program	\$168.00
ET 3100	Experimenter/Trainer	\$131.00
ET 3200	Electronic Trainer	\$157.00
ET 3400	Computer Trainer	\$347.00



ORDER BY COUPON NOW OR COME TO OUR SHOWROOM

Please rush me the Heathkit of my choice. My cheque for \$..... is enclosed plus \$7.00 for package and post.

Name

Address P/Code

Send to: W. F. Heathkit Centre

220 Park St., South Melb. 3205. Phone 699 4999.

- ☐ EE 3101
- ☐ EE 3102
- ☐ EE 3103
- ☐ EE 3104
- ☐ EE 3201
- ☐ EE 3401
- ☐ ET 3100
- ☐ ET 3200
- ☐ ET 3400

☐ Please rush me my Free catalog containing full details on the complete range of Heathkit Learning Programs.



Credit Card No:

Expiry Date

Signature

tortion either, so I was only aware of a general reduction of low frequency response in comparison with our reference speaker system.

The most striking attribute of this speaker system is that it can reproduce speech with reasonable fidelity, an ability which I regard as very important and which so many speakers lack. On orchestral music the speakers perform admirably on all string, brass and woodwind instruments, but not on drums. On soft rock they give an acceptable performance but hard rock recordings with electric guitar sounds in the 40 to 80 Hz region cannot be

played satisfactorily at high levels.

By contrast with many other speaker systems we have evaluated, the PAS 30s achieve a reasonable degree of attenuation of those frequencies below their range and thereby reduce what could otherwise be distress for the listener.

Summary

The Peerless/GRD PAS 30 is undoubtedly one of the better small speaker systems available, offering lower distortion and a flatter frequency response than most. It constitutes good value in the hotly contested 'under \$500 stakes'.

PEERLESS PAS 30 SPEAKER SYSTEM

Dimensions: 580 mm high x 291 mm wide x 290 mm deep

Weight: 15kg each unit

Price: \$498

Manufactured by: GRD Group, Melbourne.

Absolute copyright in this review and accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.



MEASURED PERFORMANCE OF PEERLESS PAS 30

FREQUENCY RESPONSE: 70Hz - 20kHz




CROSSOVER FREQUENCIES: 500Hz, 2.5kHz

SENSITIVITY:
(for 90dB average at 2m) 8.1 VRMS = 8.2 Watts (nominal into 8Ω)

HARMONIC DISTORTION:
(for 90dB at 2m)

	100Hz	1kHz	6.3kHz
2nd	-43.4	-51.5	-42.5 dB
3rd	-46.9	-46.1	-55.7 dB
4th	-64.7	-69.0	-
5th	-66.7	-56.3	-
THD	0.8%	0.6%	0.77%
100Hz	9.2Ω		
1kHz	8.9Ω		
6.3kHz	9.2Ω		
Minimum at 150Hz	6.8Ω		

INPUT IMPEDANCE:

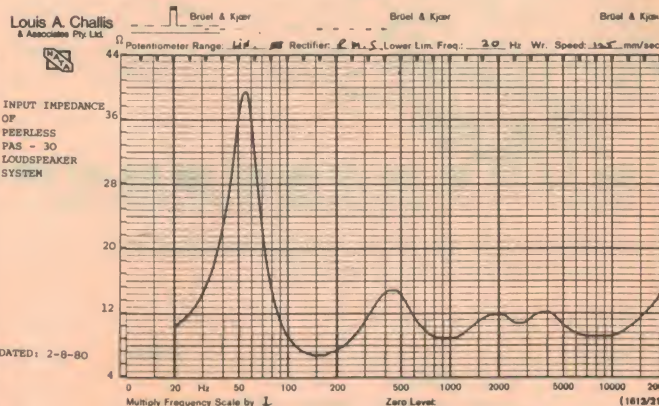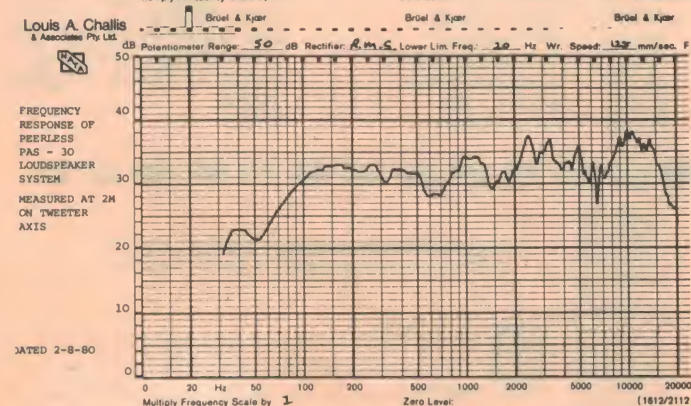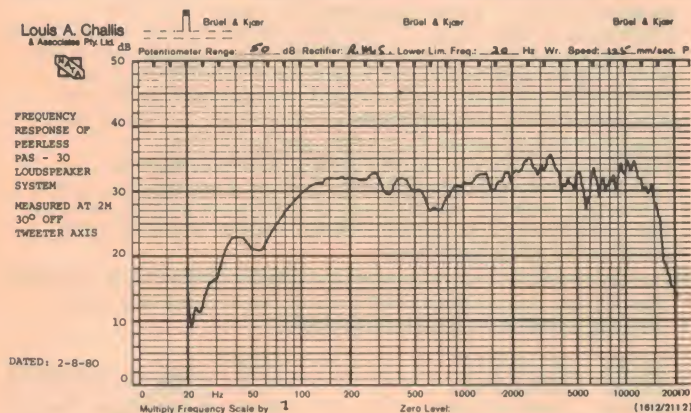

ELECTRONICS COURSES

FULL OR PART TIME

- Post Trade
- Technician
- Certificate of Technology
- Computer Service

COLOUR TV
AMATEUR - HOBBY
RADIO
COMPUTERS
COMMUNICATIONS
INDUSTRIAL CONTROL
MICROPROCESSORS
MOTOR SPEED CONTROL
DIGITAL



991 Whitehorse Rd
Box Hill 88 0691

SORCERER OWNERS!

A BETTER BASIC

The new Software Source Mod 1.01 makes your Basic into a Superbasic with capabilities that outstrip even some Disk Basics.

- Full input checking to eliminate syntax errors and line overflows.
 - Redo from start if type mismatch in input statements.
 - Save numeric arrays with confidence.
 - Full selective renumbering — move your subroutines around; make a hole to insert more text.
 - Delete any block of lines.
 - Full recovery of programme after accidental reset.
- Available only for Exidy Standard Basic Version 1.0.
Basic Mod 1.01 (include Rompac with order).....\$125.00

USE YOUR SORCERER'S GRAPHICS CAPABILITIES!!

GRAFIX

Just released! This tape-based machine-language programme allows instant definition of graphic characters. Powerful macro command allows you to define 24 characters as a block. Numeric keypad becomes a special keypad for drawing lines and curves. Inverse, flip rotate, tilt, mirror or translate characters. Study the makeup of any character. Easy-to-read 17-page booklet explains exactly how Sorcerer Graphics work and how to define your own shapes.

Grafix.....\$24.50

SPELLBINDER

The super disk wordprocessor that talks directly to your disks. No drivers to install. Automatically centres titles. View right-justified printing on the screen just as it will be printed. Alternating left and right margins! And much more. Simple to use.

Specially configured for Sorcerer (requires CP/M). \$299.00
We have an extensive range of hardware and software for the Sorcerer. We can offer memory expansions and disk expansion at reasonable rates. We are experts on Sorcerer, and offer full advice on compatibility of peripherals. Write for free catalogue.

SOFTWARE SOURCE, PO Box 364, Edgecliff, 2027.

All prices inclusive. For free catalogue send SAE.

Need specialised software? — call us, we can help.

SOFTWARE SOURCE

Phone (02) 33-4536

Give your Sorcerer or any other micro some real support in the New Year. The support of a custom made operating desk also ideal for amateur radio.



Features vinyl leather inlay, plenty of space for cassettes, disk drives, \$100 or any other buses. Feed slot for printer paper, two deep spacious drawers for convenience. Put an end to those backaches from hours of out of position programming.

Send cheque or money order to the value of \$170.00 to:

D. J. GILLIN,
170 Moore Street,
Warrnambool, VIC, 3280.
Phone (055) 62-4376.

Delivery free in Victoria. Subsidised freight interstate. An ideal Christmas gift. Chair and equipment not included.

TRY THIS EXCITING HOBBY!

Build your own Organ, at half the cost of a ready-built Organ!

WITH WERSI ORGAN KITS

Wide range of models:
COMBO to large CHURCH ORGANS



Also

- STRING ORCHESTRA
- BASS SYNTHESIZER
- ELECTRIC PIANO
- and the famous WERSIVOICE ROTATION SOUND


All available from:

CLEFTRONICS PTY. LTD.

9 Florence St., Burwood, Vic. 3125

Phone: (03) 288-7899

Catalogue 104 pages in colour — \$3.00 (incl. postage).
Klaus Wunderlich Demonstration Record, music only with jacket notes — \$7.00 (incl. postage).

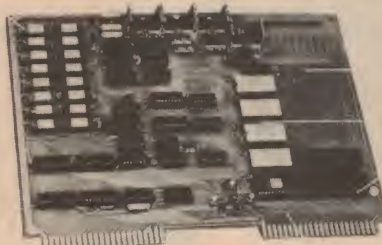

DRAM PLUS for AIM-SYM

KIM4 bus. 16K of 4116's provided with expansion to 32K; 16K ROM/EPROM space accommodates XX16 and XX32's in four sockets, EPROM Programmer for XX16 and XX32 5V types, 2 x 6552's for 40 I/O lines, 5V, 12V, 24V Regulators and -12V DC-DC converter. 50 x 70 mm WW area. Memory Test and EPROM Programming Software on cassette, 5V 1A, 12V 0.15A. (Solder mask and silk screen). A&T \$353.

PROTO PLUS II. KIM4 bus Universal 2.54mm pattern with pattern provisions for transistors, regulators, rotary switches, connectors etc. Includes address decoding and selection by DIP switch for 8K boundaries, address line buffering and bi-directional tristate data line buffers. A&T \$64.

ASK I/O. Provides a low cost method of interfacing to the AIM, SYM application connector. Includes I/O jacks, remote control relays for cassette read/write control, audio input LED 8 x switches and 8 x LED's for I/O control and demonstration. Female 44 way connector. A&T \$59.



PO BOX 6502, GOODNA 4300
PHONE (07) 288-2757

Prices subject to change without notice.

SAE for Datasheet

Hi-Energy Cassettes

C90's

1-5.....	\$1.95
6-24.....	\$1.85
25 plus	\$1.79

NO POST AND PACKAGING CHARGES

- Low noise/hi output.
- Screwed cases, not glued.
- Fully guaranteed.

Just send a cheque or money order in an envelope, with the number required and your address on the back and address it to:

T.A.A.R.C.
68 Wellington Street,
Longford, Tas. 7301.

Now
you can
breathe
easier!

NEGATIVE IONS.

For more than 20 years Medical research has been demonstrating the amazing benefits of negative air ions. They clear the air of smoke and dust, reduce fatigue and increase alertness, reduce up to 75% of airborne bacteria and much more.

In natural surroundings they are abundant but in stale, or polluted air they quickly become depleted. Now an inexpensive device to alleviate this condition is being manufactured in Australia.

The "Aironic" negative ion generator electrically produces safe, natural levels of negative ions. Stale odours and smoke are removed from the room and the air becomes fresh and invigorating once more.



See your health food shop or natural therapist or post coupon to:

BELLE LUMIERE PTY. LTD.

SYDNEY: P.O. BOX 216, Lane Cove, NSW. 2066. Tel: (02) 428 1334
MELBOURNE: 5/47 Fitzroy St., St. Kilda. Vic. 3182. Tel: (03) 534 7493
BRISBANE: P.O. BOX 184, Toowoong. Qld. 4066. Tel: (07) 371 3645

☐ Home/office model. \$85 each.

☐ Deluxe wood casing. \$95 each.

Add \$2.00 for postage and packing.
I enclose cheque/money order for

NAME

ADDRESS

POSTCODE

Bankcard Mail Orders Welcome.

Expiry Date

Signature

TTT TTT TTT TTT TTT

Send SAE for further literature on negative ions.



Mail Order KEF Drivers & Kits

CERTIFIED MAIL
DELIVERY THROUGHOUT
AUSTRALIA
& NEW ZEALAND
Bankcard accepted



Superb 30 x 21cm bass driver, with solid flat diaphragm of unique construction, acting as a perfect rigid piston, to give clean, distortion-free bass over the frequency range 20-1,000Hz. The KEF range also includes mid range and high frequency units, with dividing networks designed to link them into compatible systems.



*the no-compromise approach
to uncoloured sound*

For full information, write to:
AUDIOKITS
PO BOX 553
BROOKVALE NSW 2100



The Digital Age
has begun . . .



Model 25-90

DYNAUDIO Authentic Fidelity

YOU are into moving coil pickups, direct cut discs, fast amplifiers and gold cables. BUT are your vocalists touchably real? Do you instinctively react at a rim shot? Are you elated by orchestral dynamics or the lyrical clarity of a Bosendorfer Imperial Concert grand? CAN your speakers cope with a 19th century cannon?

DYNAUDIO high fidelity loudspeaker systems are precision engineered to the highest standards. The craftsman-built cabinets utilize sectionally braced, double layered high density walls. The Model 25-90 uses optimally tuned reflex loading in a time differential compensated three-way system. Its performance exceeds that of highly acclaimed professional monitors.

DYNAUDIO drivers use hexagonal wire, ferrofluidics, and dynamic transient linearity for fast rise time and low IM distortion.

For information on DYNAUDIO high fidelity speaker systems, models 30-90, 25-90 and 20-55, contact:

VIC: The Sound Craftsman,
61 Kooyong Rd, Nth Caulfield, 509 2444.
Tivoli Hi-Fi,
654 Glenferrie Rd Hawthorn, 818 8637.
Mr Audio, 121 Denmark St, Kew, 861 9888

NSW: Leisure Sound,
401 Pacific Hwy, Artarmon, 438 4166
& 38 York St, Sydney, 29 1364.

Discs Referenced Above

- 1 Three Blind Mice TBM5005 "No Tears"
- 2 East Wind EW1001 "The Three"
- 3 Telarc DG10039 "The Firebird"
- 4 Telarc DG 10040 "Malcolm Frager Plays Chopin"
- 5 Telarc DG10041 "1812"

DYNAUDIO (AUST) PTY LTD,
PO Box 2 Hawthorn Vic 3122

CHRISTMAS SPECIAL

THE BULLETIN

TING THE AUSTRALIAN FINANCIAL TIM

DECEMBER 25, 1980

What other present says so much?

Politics, finance, current affairs and the arts in 52 weekly episodes, written by the cream of Australia's journalists. Alan Reid, Trevor Sykes, Peter Samuel, Robert Drewe, David McNicoll, Phillip Adams, Max Harris.

What more could you say? What better way of saying it?

Fill in coupon, complete with credit card details if applicable, and send to: **The Bulletin, Box 4088 GPO, Sydney 2001 or Box 486 CPO, Auckland, New Zealand.**

Send Gift to:

Name

Address

State

Postcode

From:

Name

Address

State

Postcode

Indicate your choice by placing a tick in the appropriate boxes.

☐ 26 Weeks

☐ Gift
Subscription

☐ New

☐ Cheque
enclosed

☐ 52 Weeks


☐ Also send me
a subscription

☐ Renewal

☐ Diners
Club

☐ American
Express

☐ Bankcard



Credit Card No.

Card Expiry Date

Signature of Cardholder

(Unsigned orders cannot be accepted)

Australia and New Guinea: 26 weeks A\$21.00, 52 weeks A\$39.00
New Zealand: 26 weeks A\$21.00 — (NZ\$24.50) 52 weeks A\$39.00 — (NZ\$46.00)
Singapore, Malaysia and Hong Kong: 26 weeks A\$24.75
52 weeks A\$46.50 **Other overseas countries:** 26 weeks A\$29.50
52 weeks A\$55.00 Please Note: The cost of a subscription to The Bulletin includes air freight to Australian capitals; also Auckland, Christchurch, Wellington, Port Moresby, Singapore and Hong Kong. Subscriptions to other overseas countries are sent by surface mail. Direct airmail rates to other countries available on application.

MN&C/SLN/2/04

KITS for projects

WE GET MANY enquiries from readers wanting to know where they can get kits for the projects we publish. This list is a guide to suppliers of kits and components for ETI projects.

We have listed here most of the projects published over the last few years which are either available as kits or can still be made up by shopping around for components. Suppliers listed against a particular project will either stock it as a kit or stock the pc board plus the other components.

Printed circuit boards

Those suppliers listed against specific projects here are able to supply pc boards for those projects. Printed circuit boards for every project ever published in ETI are available through the following companies (to the best of our knowledge):

RCS Radio Radio Despatch Service
651 Forest Rd 869 George St
Bexley NSW Sydney NSW 2000

For current projects and a more comprehensive list of pc board suppliers refer to the Shoparound page in this and previous issues. This list will be updated roughly every four months.

Key to Companies

- A Applied Technology Pty Ltd, 1A Paterson Avenue, Waitara, NSW 2077. Ph. (02) 487-2711
- B Bill Edge Electronic Agencies, 115 Parramatta Road, Concord (PO Box 1005, Burwood North 2134). Ph. (02) 747-6472.
- C J.R. Components, PO Box 128, Eastwood, NSW 2122. Ph. (02) 85-3385.
- D Dick Smith Electronics P/L, Cnr Waterloo & Lane Cove Roads, North Ryde, 2113. Ph. (02) 888-3200.
- E All Electronic Components, 118 Lonsdale Street, Melbourne, Vic 3000. Ph. (03) 662-3506.
- F Tasman Electronics, 12 Victoria Street, Coburg, Vic 3058. Ph. (03) 354-5062.
- J Jaycar Pty Ltd, PO Box K39, Haymarket, NSW 2000. Ph. (02) 211-5077.
- K SM Electronics, 1096 Doncaster Rd, Doncaster East Vic 3109. Ph. (03) 842-3666.
- L Ellistronics, 289 Latrobe Street, Melbourne, Vic 3000. Ph. (03) 602-3282.
- M Mode Electronics, PO Box 365, Mascot, NSW 2020. Ph. (02) 666-6324.
- N Nebula Electronics Pty Ltd, 15 Boundary Street, Rushcutters Bay, NSW 2011. Ph. (02) 33-5850.
- O Orbit Electronics, PO Box 7176, Auckland, New Zealand.
- P Pre-Pak Electronics, 718 Parramatta Road, Croydon, NSW 2132. Ph. (02) 797-6144.
- R Rod Irving, PO Box 135, Northcote, Vic 3070. Ph. (03) 489-8131.
- V Silicon Valley, 23 Chandos Street, St. Leonards, NSW 2065. Ph. (02) 439-4655.
- W Willis Electronics, 993 Hay Street, Perth, WA 6000. Ph. (09) 321-7609.
- Y Trilogy, 40 Princes Highway, Fairy Meadow, NSW 2519.

Project Electronics

- 041 Continuity Tester W.R.D.B.Y.L
- 042 Soil Moisture Indicator R.B
- 043 Heads or Tails Circuit (Oct 76) W.R.D.E.A.F.B.Y.L
- 044 Two Tone Door Bell (Oct 76) W.R.D.E.O.A.F.B.Y.L
- 045 500 Second Timer W.D.E.A.B.Y.L
- 047 Morse Practice Set W.D.O.A.B.Y.L
- 048 Buzz Board W.D.A.B.Y.L
- 061 Simple Amplifier (Oct 76) W.R.D.E.A.B.Y.L
- 062 Simple AM Tuner (Mar 77) W.D.E.B.Y
- 063 Electronic Bongos R.D.A.B.Y.L
- 064 Simple Intercom (Nov 76) W.A.
- 065 Electronic Siren W.R.D.E.O.A.B.Y.L
- 066 Temperature Alarm (Dec 76) W.D.E.A.B.Y.L
- 067 Singing Moisture Meter D.B.Y
- 068 LED Dice Circuit (Oct 76) W.R.D.E.A.B.L
- 070 Electronic Tie Breaker (Jan 77) W.D.E.A.B.Y.L
- 071 Tape Noise Limiter (Jun 78) R.E.F
- 072 Two-Octave Organ (Jun 78) W.D.B.Y
- 081 Tachometer (Mar 77) W.E.O
- 082/
- 528 Intruder Alarm W.R.E.A
- 083 Train Controller W.R.E.L
- 084 Car Alarm W.R.D.E.A.B.Y.L
- 085 Over-rev Alarm W
- 086 FM Antenna W
- 087 Over-LED W.E
- 088 Hi-Fi Speaker W

Test Equipment

- 132 Experimenter's Power Supply (Feb 77) E.O
- 133 Phase Meter (Apr 77) E
- 134 True RMS Voltmeter (Aug 77) E
- 135 Digital Panel Meter (Oct 77) E
- 136 Linear Scale Capacitance Meter (Mar 78) W.D.E
- 137 Audio Oscillator (May 78) W.D.E
- 138 Audio Wattmeter (Nov 78) E.B
- 139 SWR/Power Meter (May 78) W
- 140 1GHz Frequency Meter-timer (Mar 78) E
- 141 Logic Trigger (Jan 79) E
- 142 High Current Power Supply (Feb 79) W.E
- 143 Curve Tracer (Jan 79) W
- 144 Expanded-scale RMS Voltmeter (Jun 79) E
- 148 Versatile Logic Test Probe (Jul 79) E.L

Simple Projects

- 243 Bip Beacon (Apr 77) F
- 244 Alarm Alarm (Feb 77) F
- 245 White Line Follower (Nov 77) F
- 246 Rain Alarm (Apr 78) F
- 248 Simple 12V to 22V Converter (Jul 78) W
- 249 Electronic Combination Lock (Apr 79) E
- 252 The Passionmeter (Aug 79) W
- 253 Electronic Grenade (Hot Potato) (May 79) W
- 254 Egg Timer (Jun 79) W

Motorists' Projects

- 316 Transistor Assisted Ignition (May 77) W.E.O.K
- 317 Rev. Monitor Counter (Jul 77) E
- 318 Digital Car Tacho (Jul 78) W.E.K
- 319 Vanwiper MK II (Sep 78) W.E.O
- 320 Battery Condition Indicator (Apr 79) E.L

Audio Projects

- 448 Disco Mixer (Nov 76) W
- 449 Balanced Microphone Amp (Nov 76) W.D.E.J.F.Y
- 450 Bucket Brigade Audio Delay Line (Dec 77) W.E
- 451 Hum Filter (Jul 79) D.E.F
- 470 60 W Amp Module (May 79) W.R.E.F.B.P.L.A.V
- 471 High Performance Stereo Preamp Control Unit (Jun 79) W.R.E.F.B.P.A.V.L
- 472 Power Supply — the Series 4000 Stereo Amp (Jul 79) W.R.E.F.B.V.L
- 473 Series 4000 Moving-coil Cartridge Preamplifier F.J
- 480 50-100 Watt Amp Modules (Dec 76) A.W.R.D.E.J.O.Y.L
- 481 12V 100 Watt Audio Amp (May 77) R.E
- 481 High Power PA/Guitar Amp (Jun 77) W
- 482 Stereo Amp (Jan 77) O.E
- 482 Stereo Amp Part 2 (Feb 77) O.E
- 483 Sound Level Meter (Feb 78) E
- 484 Simple Compressor Expander (Jul 77) A.E
- 485 Graphic Equaliser (Jun 77) W.E.J.O
- 486 Howl-round Stabiliser (Nov 77) J
- 487 Audio Spectrum Analyser (Feb 78) E
- 489 Audio Spectrum Analyser 2 (Apr 78) E.J
- 490 Audio Compressor (Dec 78) W
- 491 Simple Graphic Equaliser (Mar 79) W.E
- 495 Transmission Line Speakers (Aug 77) W

Miscellaneous

- 546 GSR Monitor (Mar 77) W.E
- 547 Telephone Bell Extender (Jun 77) E
- 548 Photographic Strobe (May 77) W.E
- 549 Induction Balance Metal Detector (May 77) W.D.E.L
- 550 Digital Dial (Aug 78) E.O
- 551 Light Chaser (Sep 78) W.E.O
- 552 LED Pendant (Sep 78) A
- 553 Tape/Slide Synchroniser (Oct 78) E
- 556 Wind Speed/Direction Indicator (Dec 78) W
- 557 Reaction Timer (Feb 79) E
- 558 Mast-head Strobe (Feb 79) E
- 559 Cable Tester (Mar 79) W
- 575 Portable Fluorescent Light Wand for Car. Camping (Aug 79) J
- 577 General Purpose Power Supply W.E.Y
- 581 Dual Power Supply (Jan 77) W.E.O.A
- 582 House Alarm (Jul 77) W
- 583 Installation Instructions (Aug 77) D.E.M
- 583 Marine Gas Alarm (Aug 77) R.D.E.O.F
- 585 Ultrasonic Switch (Sep 77) E
- 586 Shutter Speed Timer (Oct 77) E
- 587 UFO Detector (May 78) N
- 588 Theatrical Lighting Controller (Nov & Dec 77 Jan & Mar 78) E
- 589 Digital Temperature Meter (PCB135) (Dec 77) E
- 590 LCD Stopwatch (Oct 78) O.N
- 591 Up/Down Presettable Counter (Jul 78) D.E
- 592 Light Show Controller (Aug 78) E
- 593 Colour Sequencer (Dec 78) E
- 594 Development Timer (Apr 79) E
- 595 Aquarium Lamp Controller (May 79) E

Electronic Music

- 602 Mini Organ (Aug 76) W.D.E.A
- 603 Sequencer (Aug 77) W
- 604 Accentuated Beat Metronome (Sep 77) E
- 605 Temp Stabilized Log-exponential Converter (Sep 78) E

Computer Projects

- 630 Hex Display (Dec 76) E.A
- 631 ASCII Keyboard (Dec 76) W.E.O.A
- 631 Keyboard Encoder (Apr 77) W.E.O.A
- 632 Video Display Unit (Jan 77) A.E.O
- 633 TV Sync Generator (Jan 77) A.E
- 634 8080 Educational/Prototyping Interface (Jul, Aug 78) O
- 635 Microcomputer Power Supply (Sep 77) V.E.A
- 637 Cuts Cassette Interface (Jun 78) W.E.A
- 638 Eprom Programmer (Jul 78) A
- 639 Computerised Musical Doorbell (Mar 78) W.O.A.V
- 640 S100 VDU (Apr, May, Jun 78) O
- 641 S100 Printer (Sep 78) K
- 642 16k S100 RAM Card (Feb 79) A.E.L
- 650 STAC Timer (Nov 78) E
- 651 Binary to Hex Number Converter (Jun 79) E

Radio Projects

- 712 CB Power Supply (Jun 77) W.E
- 713 Add-on FM Tuner (Sep 77) W
- 714 VHF-Log-Periodic Antenna (Feb, Mar 78) W.D.E.A.Y
- 715 VHF Power Amplifiers (Nov 77) E
- 716 VHF Power Amplifiers (Jan, Feb 78) E
- 717 Crosshatch Generator (May 78) W
- 718 SW Radio (Oct 78) W.E
- 719 RF Field Strength Indicator (Nov 78) E
- 720 2m VMOS Power Amp (Jan 79) W
- 721 Aircraft Band Converter (Mar 79) E
- 722 Antenna for Aircraft Band Converter (May 79) D.E.B
- 724 Microwave Oven Leak Detector (Jul 79) E.L
- 725 Simple SSB Generator employs Polyphase Network using Standard Components (Aug 79) E.L
- 730 Get Going on Radioteletype (Aug 79) E.L

Electronic Games

- 804 Selectagame (Nov 76) O
- 804 Selectagame (Rifle Project) (Mar 77) O
- 805 Puzzle of the Drunken Sailor (Oct 77) O
- 806 Skeet (Jan 78) O
- 810 Stunt Cycle TV Game (Jun 78) D.O
- 811 TV Tank Game (Oct 78) O
- 812 Wheel of Fortune (Dec 78) O
- 813 Race Track Game (Jan 79) O
- 814 The 'Dinky-Die' (Aug 79) O



Editor
Roger Harrison VK2ZTB

Technical Editor
David Tilbrook VK2YMI

Project Manager
Phil Wait VK2DKN

Editorial Staff
William Fisher B.Sc. (Hons)
J.B. Scott B.Sc./B.E. (Hons)
VK2YBN

Jan Vernon B.A.

Art Direction and
technical photography
Ivy Hansen

Layout
Bill Crump

Reader Services
Jan Collins

Managing Editor
Collyn Rivers

Acoustical Consultants
Louis Challis & Associates

Editorial and Sales Office
4th Floor, 15 Boundary St
Rushcutters Bay NSW 2011
Ph: 33-4282; Tlx: 27243

Sales Manager: **Bob Taylor**
Sales Admin: **Jan Collins**
(address as above)

Melbourne
Bill Philpott
150 Lonsdale St
Melbourne Vic 3000
Ph: 662-1222; Tlx AA34543

New Zealand
Geoff Collins
P.O. Box 39163
Tel: (9)760-150
Auckland NZ

Adelaide
Admedia Group
24 Kensington Rd
Rose Park SA 5067
Ph: 332-8144; Tlx AA82182

United Kingdom
Australian Consolidated Press
Ludgate House
107 Fleet St
London EC4A 2AL
Ph: 353-1040; Tlx: 267163

Brisbane
Geoff Horne Agencies
60 Montanus Drive
Bellbowrie QLD 4070
Ph: 202-6229

Japan
Genzo Uchida
Banchō Media Services
15 Sanyocho
Shinjuku-Ku
Tokyo 160
Ph: 359-8866
Cable: Elbanchorito

Perth
Aubrey Barker
133 St Georges Terrace
Perth WA 6000
Ph: 322-3184; Tlx: AA93810

USA
Peter Samuel
Australian Consolidated Press
444 Madison Avenue
New York NY 10022
Ph: 751-3383; Tlx: 620892

Electronics Today International is published by Modern Magazines (Holdings) Ltd, 15 Boundary St, Rushcutters Bay, NSW 2011. It is printed (in 1980) by Wilke & Co, Browns Rd, Clayton, Victoria and distributed by Gordon and Gotch. Recommended retail price only.

Reader Enquiries

By Mail: There is no charge for replies but a foolscap-size stamped addressed envelope **must** be enclosed. Queries relating to projects can **only** be answered if related to the item as published. We cannot advise on modifications to projects, other than errata or addenda, nor if a project has been modified or if components are otherwise than specified. We try to answer letters as soon as possible. Difficult questions may take time to answer.

By phone: We can only answer readers' technical enquiries by telephone **after 4.30 pm**. In enquiring by telephone about back issues or photostats, please ask for the "Subscriptions Department". **33-4282**

ORDER FORM

I enclose \$ for (tick appropriate box/es):

NAME

ADDRESS

. POSTCODE

- ☐ Subscriptions \$21.50 per year within Australia \$
\$27.00 overseas (surface mail) \$
Airmail rates on application.
☐ Back issues (\$2.50 from April 1977 on)
☐ or photocopies (\$2.50 per article per issue)

Project No. Month Year \$
Project No. Month Year \$
Project No. Month Year \$
Project No. Month Year \$

* Please attach a list if more than four required.

- ☐ Binders No. @ \$6.10 each in NSW \$
No. @ \$7.50 each other states \$

ALL PRICES INCLUDE POSTAGE

Send orders to: **ETI, 4th Floor, 15 Boundary St,**
RUSHCUTTERS BAY NSW 2011 Phone: (02)33-4282



Direct current from the sun?

The idea of using the sun's energy to generate electric power is nothing new. Silicon cells and artificial photosynthesis are probably the best known ideas for harnessing some of the 1.35 kilowatts of radiant energy our local star throws at every square meter of our atmosphere. However, these are really small beer compared to some of the exotic suggestions that have been put forward.

The Australian astronomer, V.A. Bailey, calculated some twenty years ago that the electric potential of the sun relative to the Earth may be around 10^{19} volts (give or take an order or two of magnitude). With this kind of potential difference, even a very small current flowing from the sun to the Earth would deliver a lot of power!

But how could such a current be initiated and kept going? In the movies of course, this would be no problem — you'd use a laser, just as you do for everything else in sci-fi these days. And would you believe that an American by the name of John Krepak has seriously suggested that a high energy laser fired at the sun could in fact initiate a current by ionising molecules in the very low density gas that we normally call

DREGS

'space'?

The photons in such a laser would of course need to be quite energetic, so an ultraviolet laser seems the best possibility. Except that there are rumours that the US military (or the CIA, or somebody) is working to develop a gamma ray laser (also known as a 'graser') to use for non-benevolent purposes (naughty, naughty...). The graser seems to be ideal for ionising atoms in space. Coherent gamma rays would probably not only free the orbiting electrons, they might very well smash up the nucleus into fundamental particles.

John Krepak suggests putting a graser on the moon and aiming it at the sun, then using the current from the sun to generate microwave radiation which is beamed to Earth. Remember, you read about it first in Dregs!

More puns

There were some clever ones this time around, the standard of puns is getting noticeably better (or worse, depending on your point of view!). Young Chris

Hoffman of Riverstone NSW came up with several, his best being about interfacing a camera to the S100 buss to get a photographic memory! G. Hansper of Tullamarine in Victoria also had several, his best being about boasting of "record-breaking turntable sales". Ian Compton of SA had an amusing tale about polylingual puns being punishable and Chris Price of Brookvale NSW had this poem:

"The readers of Dregs got together
To think of new ways to make weather
Instead of less sun
They each made a pun
Their first (and their last!) get together"

Very good!, but this month's prize goes to Jim McBeath of East Doncaster, Vic, with the following tale:

"Early in World War I, electronic equipment was very heavy and horses were used where portability was needed. The Australian Wireless Corps had only one unit operating at Gallipoli, Morse Cpl. Murphy and his tatty old roan horse. The Turks had no portable units at all. One day Cpl. Murphy was shot and the horse captured. The Turks tried to use the roan and the wireless to intercept the allied morse communication, but the horse proved most unco-operative, killed two Turks and was shot. The moral of this story is: A stolen roan gathers no morse."

UNTIL WE DEVELOPED THE STEREO GROOVE, HI-FI WAS PRETTY HO-HUM!



The world of hi-fi owes a lot to the original and continuing innovation of JVC. Few companies, if any, have done as much to help turn records and record-players into the virtual musical instruments they are today... or to lead the way in developing so many *firsts* in the more recent concepts of sound amplifiers, cassette decks and computer-designed speaker

systems. Hi-fi, as we know it today, had its beginnings in 1956, with JVC's development of the 45°/45° groove for stereo records. The fact that this system still remains as the world standard is, in itself, outstanding testimony to the technology of JVC. The development revolutionised not only the record-making industry, in which we've been involved since 1930; it also paved the way for enormous advancement in the design and engineering of record-playing equipment. Now, hi-fi has expanded to



R-S77. Super-A FM/AM Stereo receiver

embrace a wealth of highly-sophisticated electronic equipment; and it's not surprising that JVC has continued to play a leading role in so much of its development.




HR-3660 EA VHS Colour Video Cassette recorder

THAT WASN'T OUR ONLY FIRST, EITHER.

We also pioneered Japan's television industry, introducing their first TV receiver just over 40 years ago. A more recent innovation is VHS, the home video recording system now gaining world-wide acceptance as *the* system for such equipment. In the course of staying ahead, we've introduced a number of world *firsts* of radical importance: the Quartz Lock turntable is one of them.

THE QUARTZ LOCK TURNTABLE. MANY TIMES MORE ACCURATE.

It stands to reason that if your equipment is at the top end of the range, then your turntable must be capable of comparable performance. Only Quartz Lock ensures this, tying the speed of the turntable to the unvarying pulse of the atom, and providing a level of accuracy far in excess of conventional turntables.



MORE MILESTONES IN HI-FI.

To match the superb quality of Quartz Lock, we produced the S.E.A. graphic equalizer system. Then we refined it to such a degree it even compensates for the effect your furniture has on sound when it leaves the speakers! To expand the capabilities of tape, we designed ANRS and



SEA-80. Stereo Graphic Equalizer

Super ANRS — automatic noise reduction systems which not only reduce distortion and 'hiss' but actually extend the dynamic range of the tape. Similarly, with speakers: at JVC we employ computers in their design to help provide the ultimate in sound reproduction.

AND NOW, SUPER-A.

In its own way, as significant a hi-fi development as the stereo groove. Imagine an amplifier which combines the *best* features of the two recognised amplifier classes (A and B)... an amp which combines the *efficiency* of one with the *low distortion* of the other. Some engineers said it couldn't be done; but not those at JVC. Enter the Super-A amplifier... the *latest JVC first!*

Distributed and Serviced by...
HAGEMEYER



THE FUTURE.

It's already with us. For instance, we were so far ahead in the new metal tape technology that our cassette decks were metal-compatible before the tapes were generally available. And now there's the JVC Electro-Dynamic Servo Tonearm, damping tonearm resonance by means of a purely electronic system and two 'thinking' linear motors. Who was it who dubbed JVC, 'the innovators'?

new class synchro-bias

SU-V8

Stereo Integrated DC Amplifier

Technics new Class 'A' amp. eliminates 'switching and cross-over distortion' with Class 'B' efficiency.



New Class A circuitry with synchro bias. Straight DC circuitry for direct coupling between DC power amp section and high-level input signals. Concentrated power block prevents distortion from electromagnetic induction. ICL phono EQ circuit with ultra-low noise FET's permits use of MC cartridge without pre-preamp or step-up transformer. Independent right and left power supplies using 2 transformers. 105 watts per channel power output at 8 Ohms from 20Hz - 20kHz. 0.007% THDF. Super bass brings the deepest bass sounds to life. Recording selector with 2-way dubbing. Remote action switches.

Technics
Sounds Alive

Technics